

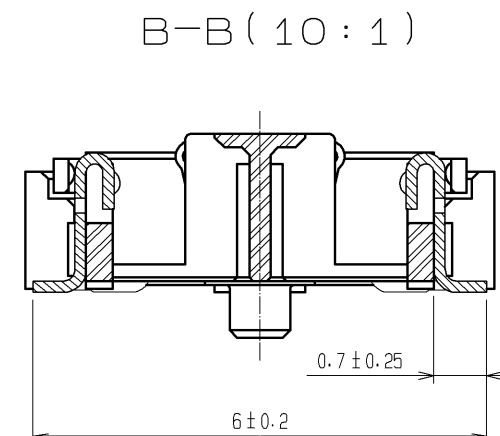
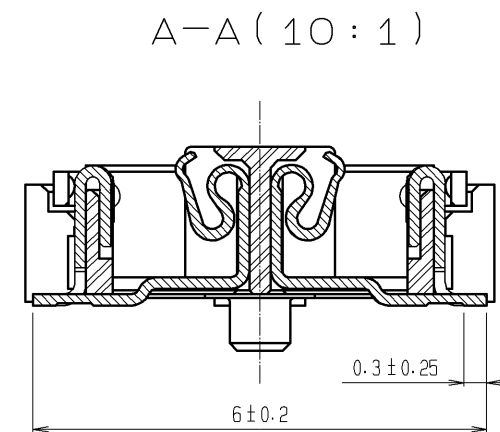



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

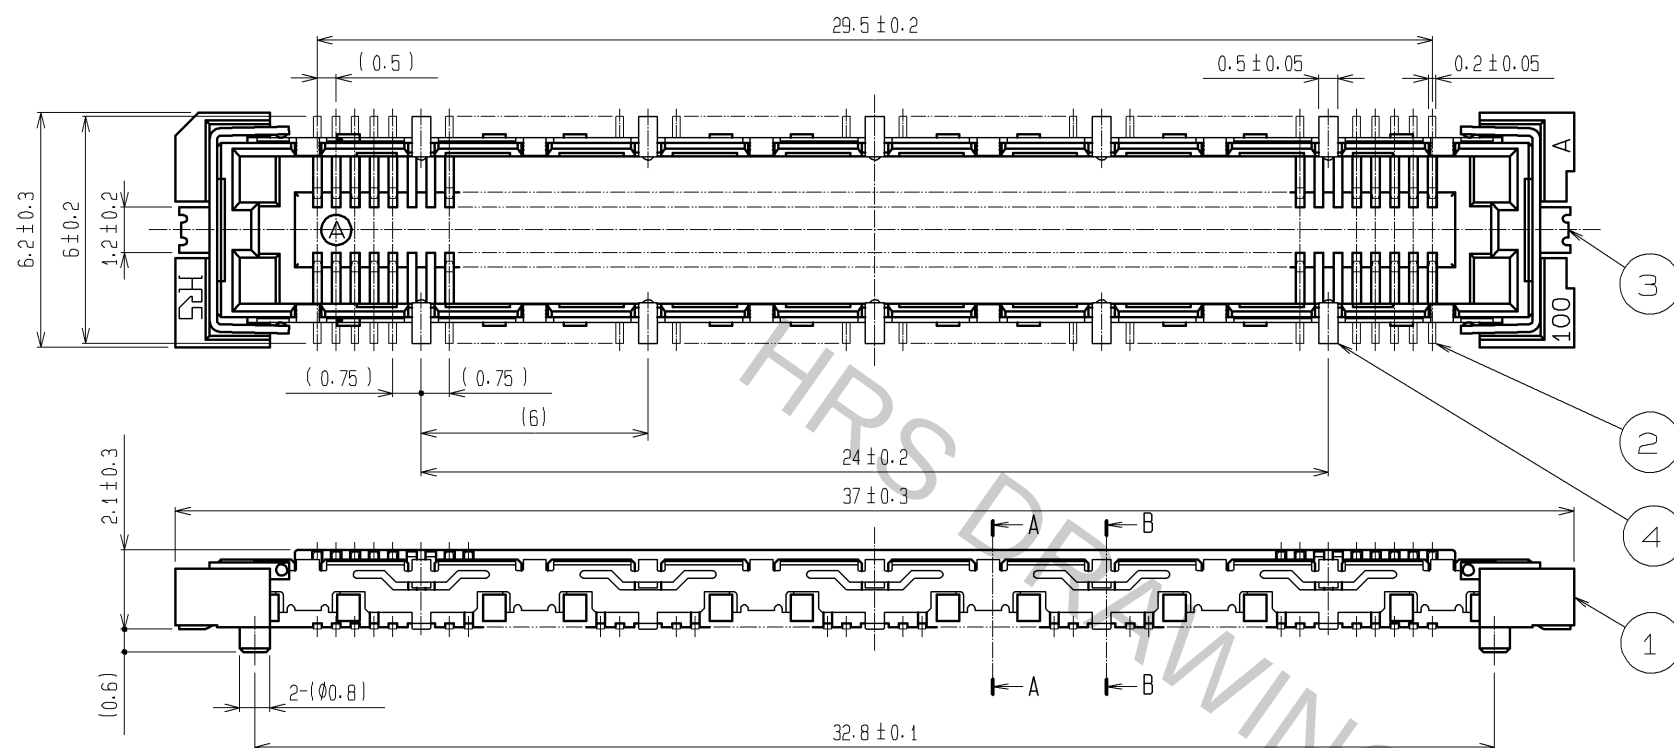

RECOMMENDED LAND PATTERN DIMENSION OF PCB

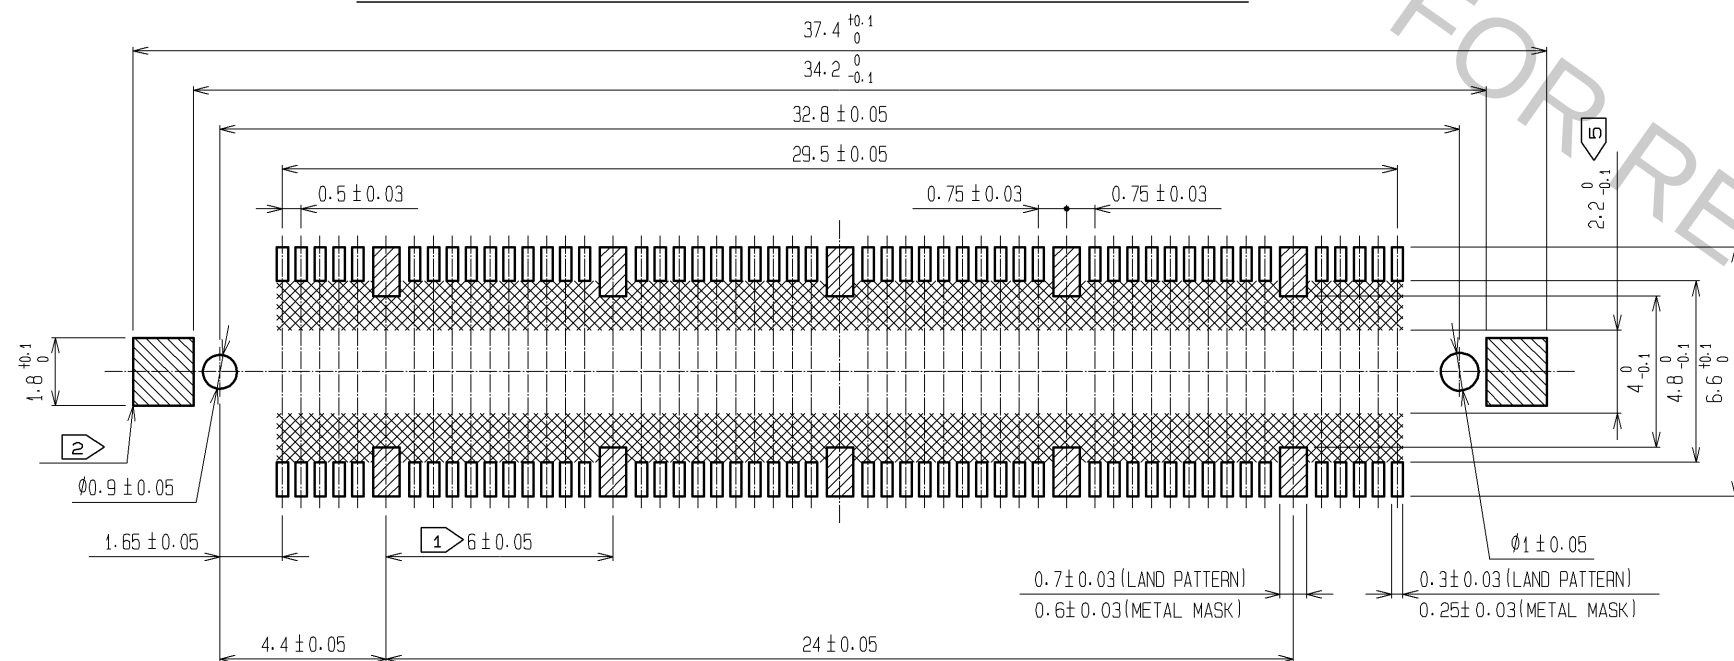

- NOTES
- 10 HATCHED PARTS: GROUND CIRCUIT.
 - 2 HATCHED PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3. 4		PHOSPHOR BRONZE	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.			
		1	LCP			BEIGE UL94V-0	LEAD AREA:GOLD FLASH		
							UNDER PLATING:NICKEL 1μm min.		
NO.		MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS			
UNITS mm			SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :HS. OKAWA		07.08.01		DRAWING NO. EDC3-152634-25			
		CHECKED :HS. OZAWA		07.08.01		PART NO. FX11A-100S/10-SV(71)			
		DESIGNED :SY. KAMIGA		07.08.01		CODE NO. CL573-0704-4-71			
		DRAWN :HK. SUNADORI		07.08.01		 1/1			