

## PD-1180 CANopen® Firmware Manual

Firmware Version V3.20 | Document Revision V2.11 • 2019-NOV-13

The PD-1180 is a full mechatronic solution, made up of a TMC429 stepper control module and a NEMA 34 (86mm flange size) motor. The PD-1180 CANopen® firmware allows to control the module using the CANopen® protocol, making use of the Trinamic TMC429 motion controller and TMC262 motor driver. Dynamic current control, and quiet, smooth and efficient operation are combined with StallGuard2™ and CoolStep™ features.




### Features

- Single Axis Stepper motor control
- Supply voltage up to 48V DC
- CANopen® CiA-402 Drive Profile
- CoolStep™
- StallGuard2™
- SensOstep™ encoder
- Additional inputs and outputs

### Applications

- Laboratory Automation
- Manufacturing
- Semiconductor Handling
- Robotics
- Factory Automation
- Test & Measurement
- Life Science
- Biotechnology
- Liquid Handling

### Simplified Block Diagram

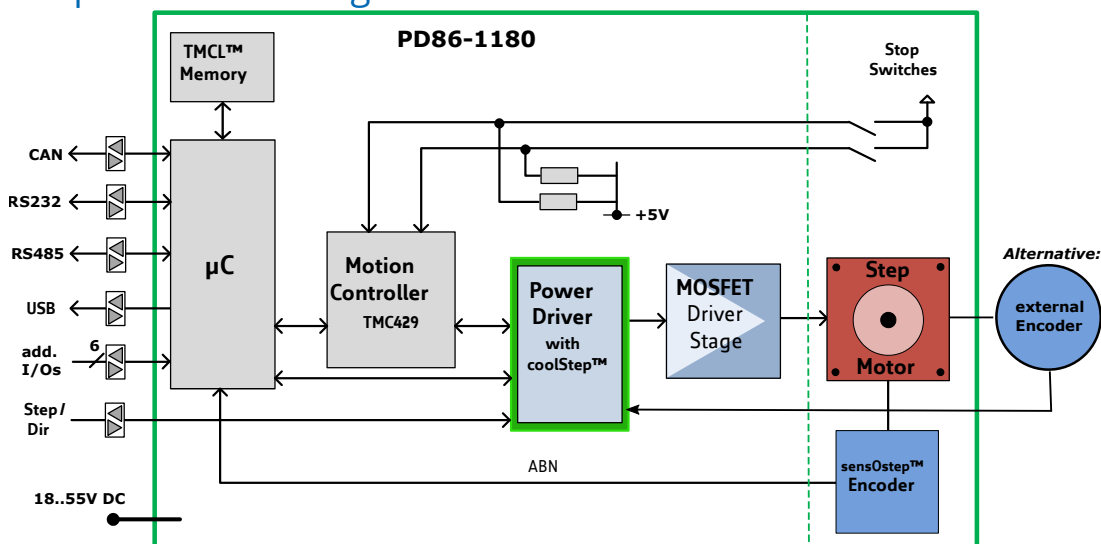

# Contents

|          |                                                                                      |           |
|----------|--------------------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Preface</b>                                                                       | <b>6</b>  |
| 1.1      | General Features of this CANopen Implementation                                      | 6         |
| 1.2      | Abbreviations used in this Manual                                                    | 7         |
| 1.3      | Firmware Update                                                                      | 7         |
| 1.4      | Trinamic's unique Features — easy to use with CANopen®                               | 8         |
| 1.4.1    | StallGuard2™                                                                         | 8         |
| 1.4.2    | CoolStep™                                                                            | 8         |
| <b>2</b> | <b>Communication</b>                                                                 | <b>10</b> |
| 2.1      | Reference Model                                                                      | 10        |
| 2.2      | NMT State Machine                                                                    | 12        |
| 2.3      | Device Model                                                                         | 13        |
| 2.4      | Object Dictionary                                                                    | 14        |
| <b>3</b> | <b>Communication Area</b>                                                            | <b>16</b> |
| 3.1      | Detailed Object Specifications                                                       | 16        |
| 3.1.1    | Object 100 <sub>h</sub> : Device Type                                                | 16        |
| 3.1.2    | Object 101 <sub>h</sub> : Error Register                                             | 16        |
| 3.1.3    | Object 1005 <sub>h</sub> : COB-ID SYNC Message                                       | 17        |
| 3.1.4    | Object 1008 <sub>h</sub> : Manufacturer Device Name                                  | 18        |
| 3.1.5    | Object 1009 <sub>h</sub> : Manufacturer Hardware Version                             | 18        |
| 3.1.6    | Object 100A <sub>h</sub> : Manufacturer Software Version                             | 18        |
| 3.1.7    | Object 100C <sub>h</sub> : Guard Time                                                | 19        |
| 3.1.8    | Object 100D <sub>h</sub> : Life Time Factor                                          | 19        |
| 3.1.9    | Object 1010 <sub>h</sub> : Store Parameters                                          | 19        |
| 3.1.10   | Object 1011 <sub>h</sub> : Restore Parameters                                        | 21        |
| 3.1.11   | Object 1014 <sub>h</sub> : COB-ID Emergency Object                                   | 22        |
| 3.1.12   | Object 1015 <sub>h</sub> : Inhibit Time EMCY                                         | 22        |
| 3.1.13   | Object 1016 <sub>h</sub> : Consumer Heartbeat Time                                   | 23        |
| 3.1.14   | Object 1017 <sub>h</sub> : Producer Heartbeat Time                                   | 23        |
| 3.1.15   | Object 1018 <sub>h</sub> : Identity Object                                           | 24        |
| 3.1.16   | Object 1023 <sub>h</sub> : OS Command                                                | 24        |
| 3.1.17   | Object 1029 <sub>h</sub> : Error Behaviour                                           | 25        |
| 3.1.18   | Objects 1400 <sub>h</sub> – 1403 <sub>h</sub> : Receive PDO Communication Parameter  | 25        |
| 3.1.19   | Objects 1600 <sub>h</sub> – 1603 <sub>h</sub> : Receive PDO Mapping Parameter        | 26        |
| 3.1.20   | Objects 1800 <sub>h</sub> – 1803 <sub>h</sub> : Transmit PDO Communication Parameter | 27        |
| 3.1.21   | Objects 1A00 <sub>h</sub> – 1A03 <sub>h</sub> : Transmit PDO Mapping Parameter       | 29        |
| <b>4</b> | <b>Manufacturer specific Area</b>                                                    | <b>30</b> |
| 4.1      | Objects related to CoolStep™                                                         | 30        |
| 4.2      | Detailed Object Specifications                                                       | 32        |
| 4.2.1    | Object 2000 <sub>h</sub> : Microstep Resolution                                      | 32        |
| 4.2.2    | Object 2001 <sub>h</sub> : Fullstep Resolution                                       | 32        |
| 4.2.3    | Object 2002 <sub>h</sub> : Brake Delay Times                                         | 32        |
| 4.2.4    | Object 2003 <sub>h</sub> : Maximum Current                                           | 33        |
| 4.2.5    | Object 2004 <sub>h</sub> : Standby Current                                           | 34        |
| 4.2.6    | Object 2005 <sub>h</sub> : Limit Switches                                            | 34        |
| 4.2.7    | Object 200A <sub>h</sub> : Enable Drive Delay Time                                   | 35        |
| 4.2.8    | Object 200B <sub>h</sub> : Encoder Parameters                                        | 35        |
| 4.2.9    | Object 200C <sub>h</sub> : Brake Current Feed                                        | 36        |
| 4.2.10   | Object 2085 <sub>h</sub> : Ramp Divisor                                              | 36        |



|        |                                                           |    |
|--------|-----------------------------------------------------------|----|
| 4.2.11 | Object 2086 <sub>h</sub> : Pulse Divisor                  | 37 |
| 4.2.12 | Object 2087 <sub>h</sub> : Maximum Velocity               | 37 |
| 4.2.13 | Object 2088 <sub>h</sub> : Maximum Acceleration           | 38 |
| 4.2.14 | Object 2089 <sub>h</sub> : Standby Delay                  | 38 |
| 4.2.15 | Object 208C <sub>h</sub> : Velocity Dimension Index       | 39 |
| 4.2.16 | Object 208E <sub>h</sub> : Acceleration Dimension Index   | 39 |
| 4.2.17 | Object 2092 <sub>h</sub> : Chopper Blank Time             | 40 |
| 4.2.18 | Object 2093 <sub>h</sub> : Chopper Mode                   | 40 |
| 4.2.19 | Object 2094 <sub>h</sub> : Chopper Hysteresis Decrement   | 41 |
| 4.2.20 | Object 2095 <sub>h</sub> : Chopper Hysteresis End         | 41 |
| 4.2.21 | Object 2096 <sub>h</sub> : Chopper Hysteresis Start       | 42 |
| 4.2.22 | Object 2097 <sub>h</sub> : Chopper Off Time               | 42 |
| 4.2.23 | Object 2098 <sub>h</sub> : Smart Energy Current Minimum   | 42 |
| 4.2.24 | Object 2099 <sub>h</sub> : Smart Energy Current Down Step | 43 |
| 4.2.25 | Object 209A <sub>h</sub> : Smart Energy Hysteresis        | 43 |
| 4.2.26 | Object 209B <sub>h</sub> : Smart Energy Current Up Step   | 44 |
| 4.2.27 | Object 209C <sub>h</sub> : Smart Energy Hysteresis Start  | 44 |
| 4.2.28 | Object 209D <sub>h</sub> : Smart Energy Filter Enable     | 45 |
| 4.2.29 | Object 209E <sub>h</sub> : StallGuard2 Threshold          | 45 |
| 4.2.30 | Object 20A1 <sub>h</sub> : Short Protection Disable       | 46 |
| 4.2.31 | Object 20A4 <sub>h</sub> : Stop on Stall                  | 46 |
| 4.2.32 | Object 20A5 <sub>h</sub> : Smart Energy Threshold Speed   | 47 |
| 4.2.33 | Object 2100 <sub>h</sub> : Home Offset Display            | 47 |
| 4.2.34 | Object 2101 <sub>h</sub> : Actual Load Value              | 47 |
| 4.2.35 | Object 2102 <sub>h</sub> : Driver Error Flags             | 48 |
| 4.2.36 | Object 2107 <sub>h</sub> : Microstep Resolution Display   | 49 |
| 4.2.37 | Object 210B <sub>h</sub> : Step Counter                   | 49 |
| 4.2.38 | Object 2700 <sub>h</sub> : TMCL Direct Communication      | 50 |
| 4.2.39 | Object 2701 <sub>h</sub> : Manufacturer Specific Mode     | 50 |
| 4.2.40 | Object 2702 <sub>h</sub> : Device Digital Inputs          | 51 |
| 4.2.41 | Object 2703 <sub>h</sub> : Device Digital Outputs         | 51 |
| 4.2.42 | Object 2704 <sub>h</sub> : CAN Bit Rate                   | 52 |
| 4.2.43 | Object 2705 <sub>h</sub> : Node ID                        | 52 |
| 4.2.44 | Object 2706 <sub>h</sub> : Store                          | 53 |
| 4.2.45 | Object 2707 <sub>h</sub> : CAN Bit Rate Load              | 53 |
| 4.2.46 | Object 2708 <sub>h</sub> : Node ID Load                   | 54 |
| 4.2.47 | Object 270E <sub>h</sub> : Device Analog Inputs           | 54 |
| 4.2.48 | Object 2710 <sub>h</sub> : Pull-up Resistors              | 55 |

|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| <b>5</b> | <b>Profile specific Area</b>                             | <b>57</b> |
| 5.1      | Detailed Object Specifications                           | 57        |
| 5.1.1    | Object 605A <sub>h</sub> : Quick Stop Option Code        | 57        |
| 5.1.2    | Object 605B <sub>h</sub> : Shutdown Option Code          | 58        |
| 5.1.3    | Object 605C <sub>h</sub> : Disable Operation Option Code | 58        |
| 5.1.4    | Object 605D <sub>h</sub> : Halt Option Code              | 59        |
| 5.1.5    | Object 605E <sub>h</sub> : Fault Reaction Option Code    | 59        |
| 5.1.6    | Object 6060 <sub>h</sub> : Modes of Operation            | 60        |
| 5.1.7    | Object 6061 <sub>h</sub> : Modes of Operation Display    | 61        |
| 5.1.8    | Object 606A <sub>h</sub> : Sensor Selection Code         | 61        |
| 5.1.9    | Object 60FD <sub>h</sub> : Digital Inputs                | 62        |
| 5.1.10   | Object 6502 <sub>h</sub> : Supported Drive Modes         | 62        |



|          |                                                                  |           |
|----------|------------------------------------------------------------------|-----------|
| <b>6</b> | <b>Profile Position Mode</b>                                     | <b>64</b> |
| 6.1      | Detailed Object Specifications                                   | 64        |
| 6.1.1    | Object 6040 <sub>h</sub> : Control Word                          | 65        |
| 6.1.2    | Object 6041 <sub>h</sub> : Status Word                           | 66        |
| 6.1.3    | Object 6062 <sub>h</sub> : Position Demand Value                 | 67        |
| 6.1.4    | Object 6063 <sub>h</sub> : Position Actual Internal Value        | 68        |
| 6.1.5    | Object 6064 <sub>h</sub> : Position Actual Value                 | 68        |
| 6.1.6    | Object 6065 <sub>h</sub> : Following Error Window                | 69        |
| 6.1.7    | Object 6067 <sub>h</sub> : Position Window                       | 69        |
| 6.1.8    | Object 6068 <sub>h</sub> : Position Window Time                  | 70        |
| 6.1.9    | Object 606C <sub>h</sub> : Velocity Actual Value                 | 70        |
| 6.1.10   | Object 607A <sub>h</sub> : Target Position                       | 71        |
| 6.1.11   | Object 607D <sub>h</sub> : Software Position Limit               | 71        |
| 6.1.12   | Object 6081 <sub>h</sub> : Profile Velocity                      | 72        |
| 6.1.13   | Object 6083 <sub>h</sub> : Profile Acceleration                  | 72        |
| 6.1.14   | Object 6084 <sub>h</sub> : Profile Deceleration                  | 73        |
| 6.1.15   | Object 6085 <sub>h</sub> : Quick Stop Deceleration               | 73        |
| 6.2      | How to move a Motor in pp Mode                                   | 73        |
| <b>7</b> | <b>Velocity Mode</b>                                             | <b>75</b> |
| 7.1      | Detailed Object Specifications                                   | 75        |
| 7.1.1    | Object 6040 <sub>h</sub> : Control Word                          | 75        |
| 7.1.2    | Object 6041 <sub>h</sub> : Status Word                           | 76        |
| 7.1.3    | Object 6042 <sub>h</sub> : vl Target Velocity                    | 78        |
| 7.1.4    | Object 6043 <sub>h</sub> : vl Velocity Demand                    | 78        |
| 7.1.5    | Object 6044 <sub>h</sub> : vl Velocity Actual Value              | 79        |
| 7.1.6    | Object 6046 <sub>h</sub> : vl Velocity Min Max Amount            | 79        |
| 7.1.7    | Object 6048 <sub>h</sub> : vl Velocity Acceleration              | 79        |
| 7.1.8    | Object 6049 <sub>h</sub> : vl Velocity Deceleration              | 80        |
| 7.2      | How to move a Motor in vl Mode                                   | 80        |
| <b>8</b> | <b>Profile Velocity Mode</b>                                     | <b>82</b> |
| 8.1      | Detailed Object Specifications                                   | 82        |
| 8.1.1    | Object 6040 <sub>h</sub> : Control Word                          | 82        |
| 8.1.2    | Object 6041 <sub>h</sub> : Status Word                           | 83        |
| 8.1.3    | Object 6062 <sub>h</sub> : Position Demand Value                 | 85        |
| 8.1.4    | Object 6063 <sub>h</sub> : Position Actual Internal Value        | 85        |
| 8.1.5    | Object 6064 <sub>h</sub> : Position Actual Value                 | 85        |
| 8.1.6    | Object 6065 <sub>h</sub> : Following Error Window                | 86        |
| 8.1.7    | Object 606C <sub>h</sub> : Velocity Actual Value                 | 86        |
| 8.1.8    | Object 607D <sub>h</sub> : Software Position Limit               | 87        |
| 8.1.9    | Object 6083 <sub>h</sub> : Profile Acceleration                  | 87        |
| 8.1.10   | Object 6085 <sub>h</sub> : Quick Stop Deceleration               | 88        |
| 8.1.11   | Object 60FF <sub>h</sub> : Target Velocity                       | 88        |
| 8.2      | How to move a Motor in pv Mode                                   | 89        |
| <b>9</b> | <b>Homing Mode</b>                                               | <b>90</b> |
| 9.1      | Homing Methods                                                   | 91        |
| 9.1.1    | Homing Method 1: Homing on negative Limit Switch and Index Pulse | 91        |
| 9.1.2    | Homing Method 2: Homing on positive Limit Switch and Index Pulse | 92        |
| 9.1.3    | Homing Method 3: Homing on positive Home Switch and Index Pulse  | 92        |
| 9.1.4    | Homing Method 5: Homing on negative Home Switch and Index Pulse  | 92        |
| 9.1.5    | Homing Method 17: Homing on negative Limit Switch                | 93        |
| 9.1.6    | Homing Method 18: Homing on positive Limit Switch                | 93        |



|           |                                                     |            |
|-----------|-----------------------------------------------------|------------|
| 9.1.7     | Homing Method 19: Homing on positive Home Switch    | 94         |
| 9.1.8     | Homing Method 21: Homing on negative Home Switch    | 94         |
| 9.1.9     | Homing Method 33 and 34: Homing on next Index Pulse | 94         |
| 9.1.10    | Homing Method 35: Current Position as Home Position | 95         |
| 9.2       | Detailed Object Specifications                      | 96         |
| 9.2.1     | Object 6040 <sub>h</sub> : Control Word             | 96         |
| 9.2.2     | Object 6041 <sub>h</sub> : Status Word              | 97         |
| 9.2.3     | Object 606C <sub>h</sub> : Velocity Actual Value    | 98         |
| 9.2.4     | Object 607C <sub>h</sub> : Home Offset              | 99         |
| 9.2.5     | Object 6098 <sub>h</sub> : Homing Method            | 100        |
| 9.2.6     | Object 6099 <sub>h</sub> : Homing Speeds            | 100        |
| 9.2.7     | Object 609A <sub>h</sub> : Homing Acceleration      | 100        |
| 9.3       | How to start a Homing in hm Mode                    | 101        |
| <b>10</b> | <b>Emergency Messages (EMCY)</b>                    | <b>102</b> |
| <b>11</b> | <b>Figures Index</b>                                | <b>105</b> |
| <b>12</b> | <b>Tables Index</b>                                 | <b>106</b> |
| <b>13</b> | <b>Supplemental Directives</b>                      | <b>109</b> |
| 13.1      | Producer Information                                | 109        |
| 13.2      | Copyright                                           | 109        |
| 13.3      | Trademark Designations and Symbols                  | 109        |
| 13.4      | Target User                                         | 109        |
| 13.5      | Disclaimer: Life Support Systems                    | 109        |
| 13.6      | Disclaimer: Intended Use                            | 109        |
| 13.7      | Collateral Documents & Tools                        | 110        |
| <b>14</b> | <b>Revision History</b>                             | <b>111</b> |
| 14.1      | Firmware Revision                                   | 111        |
| 14.2      | Document Revision                                   | 111        |



# 1 Preface

This document specifies objects and modes of operation of the Trinamic PD-1180 stepper motor control module with CANopen firmware. The CANopen firmware is designed to fulfill the CANopen DS402 and DS301 standards. This manual assumes that the reader is already familiar with the basics of the CANopen protocol, defined by the DS301 and DS402 standards of the CAN-CiA.

If necessary it is always possible to turn the module into a TMCL module by loading the PD-1180 TMCL firmware again through the USB interface, with the help of the firmware update function of the TMCL-IDE 3.0.

## 1.1 General Features of this CANopen Implementation

### Main Characteristics

- Communication according to standard CiA-301 V4.1
- CAN bit rate: 20...1000kBit/s
- CAN ID: 11 bit
- Node ID: 1...127 (use vendor specific objects for changing the node ID)
- NMT services: NMT slave

### SDO Communication

- 1 server
- Expedited transfer
- Segmented transfer
- No block transfer

### PDO Communication

- Producer
- Consumer
- RPDOs
  - Axis 0: 1, 2, 3, 4
  - Transmission modes: asynchronous.
  - Dynamic mapping with max. 3 mapping entries.
  - Default mappings: according to CiA-402 for first three PDOs of each axis, manufacturer specific for other PDOs of each axis.
- TPDOs
  - Axis 0: 1, 2, 3, 4
  - Transmission modes: asynchronous, asynchronous with event timer, synchronous.
  - Dynamic mapping with max. 3 mapping entries.
  - Default mappings: according to CiA-402 for first three PDOs of each axis, manufacturer specific for other PDOs of each axis.



### Further Characteristics

- SYNC: consumer (TPDOs 3 are synchronous PDOs)
- Emergency: producer
- RTR: supported only for node guarding/life guarding
- Heartbeat: consumer and producer

## 1.2 Abbreviations used in this Manual

| Abbreviations |                               |
|---------------|-------------------------------|
| CAN           | Controller area network       |
| CHGND         | chassis ground / earth ground |
| COB           | Communication object          |
| FSA           | Finite state automaton        |
| FSM           | Finite state machine          |
| NMT           | Network management            |
| ID            | Identifier                    |
| LSB           | Least significant bit         |
| MSB           | Most significant bit          |
| PDO           | Process data object           |
| PDS           | Power drive system            |
| RPDO          | Receive process data object   |
| SDO           | Service data object           |
| TPDO          | Transmit process data object  |
| EMCY          | Emergency object              |
| rw            | Read and write                |
| ro            | Read only                     |
| hm            | Homing mode                   |
| pp            | Profile position mode         |
| pv            | Profile velocity mode         |
| vm            | Velocity mode                 |

Table 1: Abbreviations used in this Manual

## 1.3 Firmware Update

The software running on the microprocessor consists of two parts, a boot loader and the CANopen firmware itself. Whereas the boot loader is installed during production and testing at TRINAMIC and remains untouched throughout the whole lifetime, the CANopen firmware can easily be updated by the user. The new firmware can be loaded into the module via the firmware update function of the TMCL-IDE, using the USB interface of the module.



## 1.4 Trinamic's unique Features — easy to use with CANopen®

### 1.4.1 StallGuard2™

StallGuard2™ is a high-precision sensorless load measurement using the back EMF of the coils. It can be used for stall detection as well as other uses at loads below those which stall the motor. The StallGuard2™ measurement value changes linearly over a wide range of load, velocity, and current settings. At maximum motor load, the value reaches zero or is near zero. This is the most energy-efficient point of operation for the motor.

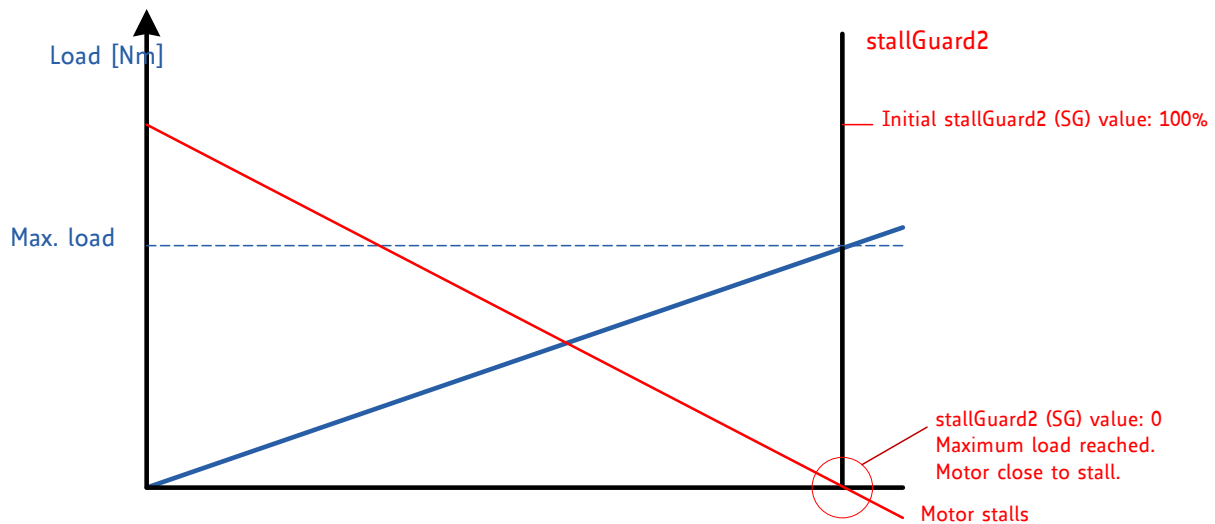


Figure 1: stallGuard2 Load Measurement as a Function of Load

### 1.4.2 CoolStep™

CoolStep™ is a load-adaptive automatic current scaling based on the load measurement via StallGuard2™ adapting the required current to the load. Energy consumption can be reduced by as much as 75%. CoolStep™ allows substantial energy savings, especially for motors which see varying loads or operate at a high duty cycle. Because a stepper motor application needs to work with a torque reserve of 30% to 50%, even a constant-load application allows significant energy savings because CoolStep™ automatically enables torque reserve when required. Reducing power consumption keeps the system cooler, increases motor life, and allows cost reduction.



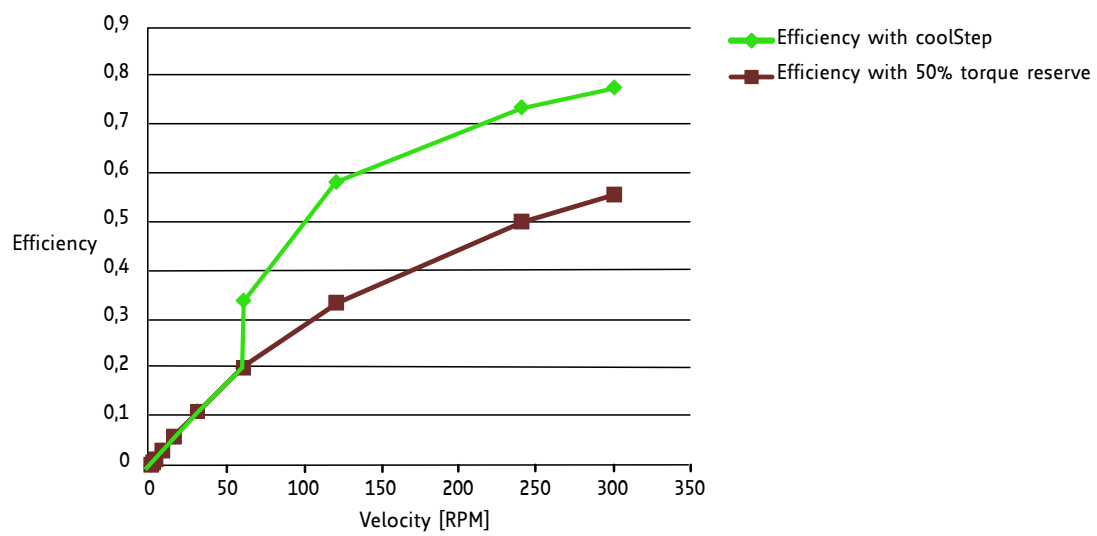


Figure 2: Energy Efficiency Example with CoolStep



## 2 Communication

### 2.1 Reference Model

The application layer comprises a concept to configure and communicate real-time-data as well as the mechanisms for synchronization between devices. The functionality which the application layer offers to an application is logically divided over different service data objects (SDO) in the application layer. A service object offers a specific functionality and all the related services.

Applications interact by invoking services of a service object in the application layer. To realize these services this object exchanges data via the CAN Network with peer service object(s) using a protocol.

The application and the application layer interact with service primitives.

| Service Primitives |                                                                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Primitive          | Definition                                                                                                                                                |
| Request            | Issued by the application to the application layer to request a service.                                                                                  |
| Indication         | Issued by the application layer to the application to report an internal event detected by the application layer or indicate that a service is requested. |
| Response           | Issued by the application to the application layer to respond to a previous received indication.                                                          |
| Confirmation       | Issued by the application layer to the application to report the result of a previously issued request.                                                   |

*Table 2: Service Primitives*

A service type defines the primitives that are exchanged between the application layer and the cooperating applications for a particular service of a service object. Unconfirmed and confirmed services are collectively called remote services.



| Service Types              |                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                       | Definition                                                                                                                                                                                                                                                                                                                                                                             |
| Local service              | Involves only the local service object. The application issues a request to its local service object that executes the requested service without communicating with peer service object(s).                                                                                                                                                                                            |
| Unconfirmed service        | Involves one or more peer service objects. The application issues a request to its local service object. This request is transferred to the peer service object(s) that each passes it to their application as an indication. The result is not confirmed back.                                                                                                                        |
| Confirmed service          | Can involve only one peer service object. The application issues a request to its local service object. This request is transferred to the peer service object that passes it to the other application as an indication. The other application issues a response that is transferred to the originating service object that passes it as a confirmation to the requesting application. |
| Provider initiated service | Involves only the local service object. The service object (being the service provider) detects an event not solicited by a requested service. This event is then indicated to the application.                                                                                                                                                                                        |

*Table 3: Service Types*

## 2.2 NMT State Machine

The finite state machine (FSM) or simply state machine is a model of behavior composed of a finite number of states, transitions between those states, and actions. It shows which way the logic runs when certain conditions are met.

Starting and resetting the device is controlled via the state machine. The NMT state machine consists of the states shown in figure 3.

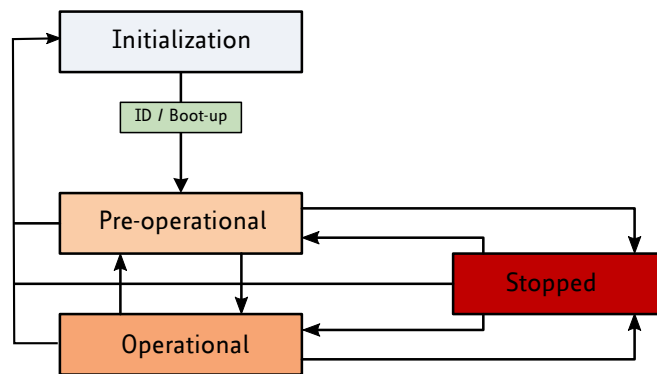


Figure 3: NMT State Machine

After power-on or reset the device enters the Initialization state. After the device initialization is finished, the device automatically transits to the **Pre-operational** state and indicates this state transition by sending the boot-up message. This way the device indicates that it is ready to work. A device that stays in Pre-operational state may start to transmit SYNC-, time stamp- or heartbeat message. In contrast to the PDO communication that is disabled in this state, the device can communicate via SDO.

The PDO communication is only possible within the **Operational** state. During Operational state the device can use all supported communication objects.

A device that was switched to the **Stopped** state only reacts on received NMT commands. In addition the device indicates the current NMT state by supporting the error control protocol during Stopped state.

The transitions between states are made by issuing a network management (NMT) communication object to the device. The NMT protocols are used to generate state machine change commands (e.g. to start and stop the device), detect remote device boot-ups and error conditions.

The Heartbeat message of a CANopen device contains the device status of the NMT state machine and is sent cyclically by the CANopen device.

The NMT state machine (or DS301 state machine) is not to be confused with the DS402 state machine. There is only one NMT state machine for the entire device, but for each motor there is a DS402 state machine which controls the motor. There are no links between these state machines, with one exception: When the NMT state machine is being switched to the stopped state, all DS402 state machines that are in OPERATION\_ENABLED state will be switch to FAULT state.



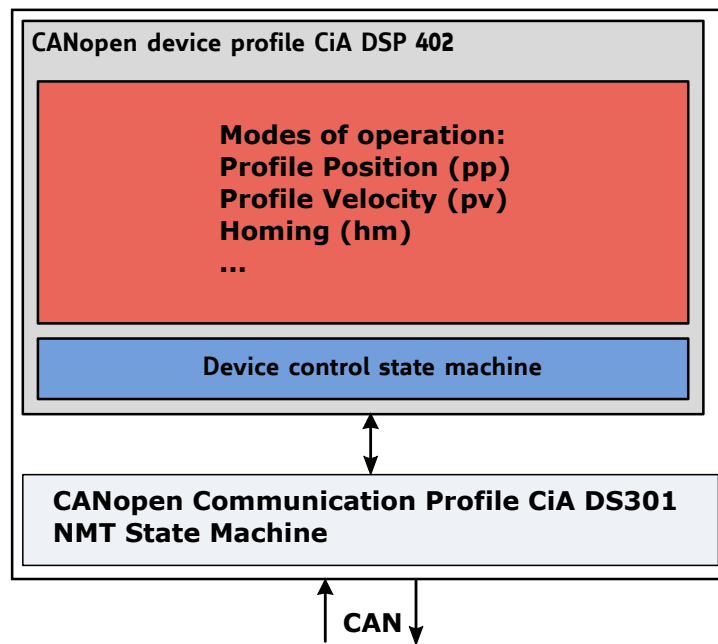


Figure 4: Communication Architecture

## 2.3 Device Model

A CANopen device mainly consists of the following parts:

- **Communication:** This function unit provides the communication objects and the appropriate functionality to transport data items via the underlying network structure.
- **Object dictionary:** The object dictionary is a collection of all the data items which have an influence on the behavior of the application objects, the communication objects and the state machine used on this device.
- **Application:** The application comprises the functionality of the device with respect to the interaction with the process environment.



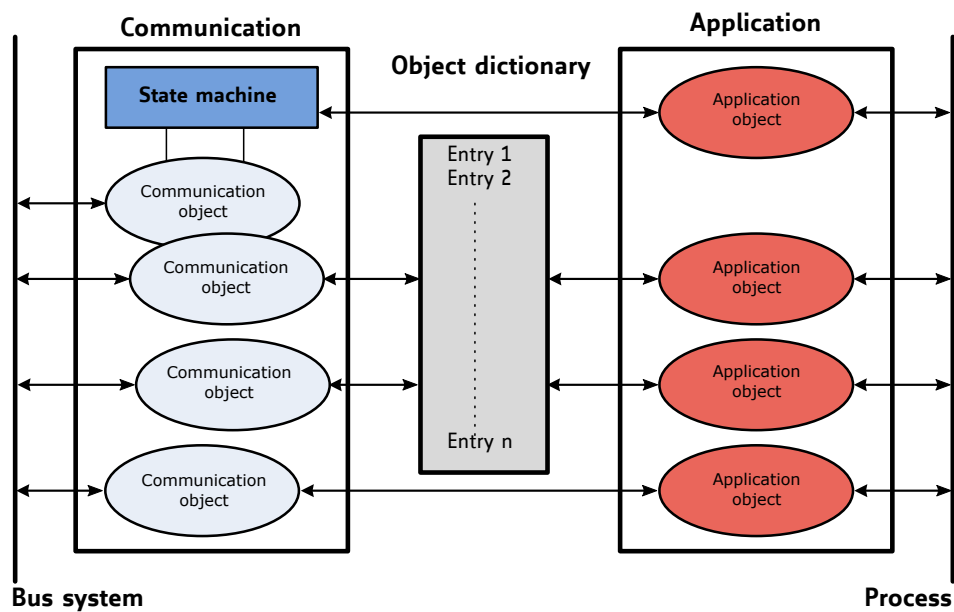


Figure 5: Device Model

## 2.4 Object Dictionary

The most important part of a device profile is the object dictionary description. The object dictionary is essentially a grouping of objects accessible via the network in an ordered pre-defined fashion. Each object within the dictionary is addressed using a 16-bit index. The overall layout of the standard object dictionary is shown in table 4:

| Object Dictionary                     |                                             |
|---------------------------------------|---------------------------------------------|
| Index                                 | Object                                      |
| 0000 <sub>h</sub>                     | Not used.                                   |
| 0001 <sub>h</sub> – 001F <sub>h</sub> | Static data types.                          |
| 0020 <sub>h</sub> – 003F <sub>h</sub> | Complex data types.                         |
| 0040 <sub>h</sub> – 005F <sub>h</sub> | Manufacturer specific complex data types.   |
| 0060 <sub>h</sub> – 007F <sub>h</sub> | Device profile specific static data types.  |
| 0080 <sub>h</sub> – 009F <sub>h</sub> | Device profile specific complex data types. |
| 00A0 <sub>h</sub> – 0FFF <sub>h</sub> | Reserved for further use.                   |
| 1000 <sub>h</sub> – 1FFF <sub>h</sub> | Communication profile area.                 |
| 2000 <sub>h</sub> – 5FFF <sub>h</sub> | Manufacturer specific profile area.         |
| 6000 <sub>h</sub> – 9FFF <sub>h</sub> | Standardized device profile area.           |
| A000 <sub>h</sub> – BFFF <sub>h</sub> | Standardized interface profile area.        |
| C000 <sub>h</sub> – FFFF <sub>h</sub> | Reserved for further use.                   |

Table 4: Object Dictionary



The communication profile area at indices 1000<sub>h</sub> through 1FFF<sub>h</sub> contains the communication specific parameters for the CAN network. These entries are common to all devices.

The manufacturer segment at indices 2000<sub>h</sub> through 5FFF<sub>h</sub> contains manufacturer specific objects. These objects control the special features of the Trinamic PD-1180 motion control device.

The standardized device profile area at indices 6000<sub>h</sub> through 9FFF<sub>h</sub> contains all data objects common to a class of devices that can be read or written via the network. They describe the device parameters and the device functionality of the device profile.



## 3 Communication Area

The communication area contains all objects that define the communication parameters of the CANopen device according to the DS301 standard.

### 3.1 Detailed Object Specifications

#### 3.1.1 Object 1000<sub>h</sub>: Device Type

This object contains information about the device type. The object 1000<sub>h</sub> describes the type of device and its functionality. It is composed of a 16-bit field which describes the device profile that is used and a second 16-bit field which provides additional information about optional functionality of the device.

| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 1000 <sub>h</sub>  | Device type | Variable    | UNSIGNED32 |

Table 5: Object Description (1000<sub>h</sub>)

| Entry Description |        |             |             |                       |
|-------------------|--------|-------------|-------------|-----------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value         |
| 0                 | ro     | no          | UNSIGNED32  | FFFC0192 <sub>h</sub> |

Table 6: Entry Description (1000<sub>h</sub>)

#### 3.1.2 Object 1001<sub>h</sub>: Error Register

This object contains error information. The CANopen device maps internal errors into object 1001<sub>h</sub>. It is part of an emergency object.

| Object Description |                |             |           |
|--------------------|----------------|-------------|-----------|
| Index              | Name           | Object Type | Data Type |
| 1001 <sub>h</sub>  | Error register | Variable    | UNSIGNED8 |

Table 7: Object Description (1001<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | no          | UNSIGNED8   | 0             |

Table 8: Entry Description (1001<sub>h</sub>)



| Error Register Bits |                         |
|---------------------|-------------------------|
| Bit                 | Definition              |
| 0                   | Generic error           |
| 1                   | Current                 |
| 2                   | Voltage                 |
| 3                   | Temperature             |
| 4                   | Communication error     |
| 5                   | Device profile specific |
| 6                   | Reserved (always 0)     |
| 7                   | Manufacturer specific   |

Table 9: Error Register Bits

### 3.1.3 Object 1005<sub>h</sub>: COB-ID SYNC Message

This object defines the COB-ID of the synchronization object (SYNC). Further, it defines whether the module generates the SYNC.

| Value Definition |           |                                                                              |
|------------------|-----------|------------------------------------------------------------------------------|
| Bit              | Name      | Definition                                                                   |
| 30               | Generate  | 0: Device does not generate SYNC message<br>1: Device generates SYNC message |
| 29               | Frame     | Not supported, always set to 0.                                              |
| 28...11          | 29 bit ID | Not supported, always set to 0.                                              |
| 10...0           | 11 bit ID | 11 bit COB-ID.                                                               |

Table 10: Value Definition (1005<sub>h</sub>)

| Object Description |                     |             |            |
|--------------------|---------------------|-------------|------------|
| Index              | Name                | Object Type | Data Type  |
| 1005 <sub>h</sub>  | COB-ID SYNC message | Variable    | UNSIGNED32 |

Table 11: Object Description (1005<sub>h</sub>)

| Entry Description |        |             |             |                 |
|-------------------|--------|-------------|-------------|-----------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value   |
| 0                 | rw     | no          | UNSIGNED32  | 80 <sub>h</sub> |

Table 12: Entry Description (1005<sub>h</sub>)

### 3.1.4 Object 1008<sub>h</sub>: Manufacturer Device Name

This object contains the name of the device as given by the manufacturer.

| Object Description |                          |             |                |
|--------------------|--------------------------|-------------|----------------|
| Index              | Name                     | Object Type | Data Type      |
| 1008 <sub>h</sub>  | Manufacturer Device Name | Variable    | Visible String |

Table 13: Object Description (1008<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | no          | —           | PD-1180       |

Table 14: Entry Description (1008<sub>h</sub>)

### 3.1.5 Object 1009<sub>h</sub>: Manufacturer Hardware Version

This object contains the hardware version description.

| Object Description |                               |             |                |
|--------------------|-------------------------------|-------------|----------------|
| Index              | Name                          | Object Type | Data Type      |
| 1009 <sub>h</sub>  | Manufacturer Hardware Version | Variable    | Visible String |

Table 15: Object Description (1009<sub>h</sub>)

| Entry Description |        |             |             |                              |
|-------------------|--------|-------------|-------------|------------------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value                |
| 0                 | ro     | no          | —           | Depends on device, e.g. 1.0. |

Table 16: Entry Description (1009<sub>h</sub>)

### 3.1.6 Object 100A<sub>h</sub>: Manufacturer Software Version

This object contains the software version description.

| Object Description |                               |             |                |
|--------------------|-------------------------------|-------------|----------------|
| Index              | Name                          | Object Type | Data Type      |
| 100A <sub>h</sub>  | Manufacturer Software Version | Variable    | Visible String |

Table 17: Object Description (100A<sub>h</sub>)



| Entry Description |        |             |             |                              |
|-------------------|--------|-------------|-------------|------------------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value                |
| 0                 | ro     | no          | —           | Depends on device, e.g. 1.0. |

Table 18: Entry Description (100A<sub>h</sub>)

### 3.1.7 Object 100C<sub>h</sub>: Guard Time

The objects at index 100C<sub>h</sub> and 100D<sub>h</sub> shall indicate the configured guard time respectively the life time factor. The life time factor multiplied with the guard time gives the life time for the life guarding protocol.

| Object Description |            |             |            |
|--------------------|------------|-------------|------------|
| Index              | Name       | Object Type | Data Type  |
| 100C <sub>h</sub>  | Guard Time | Variable    | UNSIGNED16 |

Table 19: Object Description (100C<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED16  | 0             |

Table 20: Entry Description (100C<sub>h</sub>)

### 3.1.8 Object 100D<sub>h</sub>: Life Time Factor

The life time factor multiplied with the guard time gives the life time for the life guarding protocol.

| Object Description |                  |             |           |
|--------------------|------------------|-------------|-----------|
| Index              | Name             | Object Type | Data Type |
| 100D <sub>h</sub>  | Life Time Factor | Variable    | UNSIGNED8 |

Table 21: Object Description (100D<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED8   | 0             |

Table 22: Entry Description (100D<sub>h</sub>)

### 3.1.9 Object 1010<sub>h</sub>: Store Parameters

This object supports the saving of parameters in non volatile memory. By read access the device provides information about its saving capabilities.



There are several parameter groups:

- Sub-index 0<sub>h</sub>: contains the largest sub-index that is supported.
- Sub-index 1<sub>h</sub>: saves all parameters.
- Sub-index 2<sub>h</sub>: saves communication parameters 2704<sub>h</sub> and 2705<sub>h</sub>.
- Sub-index 3<sub>h</sub>: saves device profile parameters.
- Sub-index 4<sub>h</sub>: saves motor 0 parameters.

#### Note

In order to avoid storage of parameters by mistake, storage is only executed when a specific signature is written to the appropriate sub-Index. This signature is "save" (65766173<sub>h</sub>, see also table 23).

| Save Signature  |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|
| e               | v               | a               | s               |
| 65 <sub>h</sub> | 76 <sub>h</sub> | 61 <sub>h</sub> | 73 <sub>h</sub> |

Table 23: Save Signature

On reception of the correct signature in the appropriate sub-index the device stores the parameter and then confirms the SDO transmission (initiate download response). If the storing failed, the device responds with an abort SDO transfer (abort code: 06060000<sub>h</sub>). If a wrong signature is written, the device refuses to store and responds with abort SDO transfer (abort code: 0800002x<sub>h</sub>).

On read access, each sub-index provides information if it is possible to store the parameter group. It reads 1 if yes and 0 if no.

| Object Description |                  |             |            |
|--------------------|------------------|-------------|------------|
| Index              | Name             | Object Type | Data Type  |
| 1010 <sub>h</sub>  | Store Parameters | Array       | UNSIGNED32 |

Table 24: Object Description (1010<sub>h</sub>)

| Entry Description |                                |        |             |             |               |
|-------------------|--------------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description                    | Access | PDO Mapping | Value Range | Default Value |
| 01 <sub>h</sub>   | Save all parameters            | rw     | no          | UNSIGNED32  | —             |
| 02 <sub>h</sub>   | Save communication parameters  | rw     | no          | UNSIGNED32  | —             |
| 03 <sub>h</sub>   | Save device profile parameters | rw     | no          | UNSIGNED32  | —             |
| 04 <sub>h</sub>   | Save motor axis 0 parameters   | rw     | no          | UNSIGNED32  | —             |

Table 25: Entry Description (1010<sub>h</sub>)



### 3.1.10 Object 1011<sub>h</sub>: Restore Parameters

With this object the default values of parameters according to the communication or device profile are restored. By read access the device provides information about its capabilities to restore these values.

There are several parameter groups:

- Sub-index 0<sub>h</sub>: contains the largest sub-index that is supported.
- Sub-index 1<sub>h</sub>: restores all parameters (factory reset).
- Sub-index 2<sub>h</sub>: restores communication parameters 2704<sub>h</sub> and 2705<sub>h</sub>.
- Sub-index 3<sub>h</sub>: restores device profile parameters.
- Sub-index 4<sub>h</sub>: restores motor 0 parameters.

#### Note

In order to avoid restoring the parameters by mistake, restoring is only executed when a specific signature is written to the appropriate sub-Index. This signature is "load" (64616F6C<sub>h</sub>, see also table 26).

| Load Signature  |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|
| d               | a               | o               | l               |
| 64 <sub>h</sub> | 61 <sub>h</sub> | 6F <sub>h</sub> | 6C <sub>h</sub> |

Table 26: Load Signature

On reception of the correct signature in the appropriate sub-index the device restores the parameter and then confirms the SDO transmission (initiate download response). If the restoring failed, the device responds with an abort SDO transfer (abort code: 06060000<sub>h</sub>). If a wrong signature is written, the device refuses to restore and responds with abort SDO transfer (abort code: 0800002x<sub>h</sub>).

On read access, each sub-index provides information if it is possible to restore the parameter group. It reads 1 if yes and 0 if no.

After the default values have been restored they will become active after the next rest or power cycle of the PD-1180.

| Object Description |                    |             |            |
|--------------------|--------------------|-------------|------------|
| Index              | Name               | Object Type | Data Type  |
| 1011 <sub>h</sub>  | Restore parameters | Array       | UNSIGNED32 |

Table 27: Object Description (1011<sub>h</sub>)



| Entry Description |                                   |        |             |             |               |
|-------------------|-----------------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description                       | Access | PDO Mapping | Value Range | Default Value |
| 01h               | Restore all parameters            | rw     | no          | UNSIGNED32  | —             |
| 02h               | Restore communication parameters  | rw     | no          | UNSIGNED32  | —             |
| 03h               | Restore device profile parameters | rw     | no          | UNSIGNED32  | —             |
| 04h               | Restore motor axis 0 parameters   | rw     | no          | UNSIGNED32  | —             |

Table 28: Entry Description (1011<sub>h</sub>)

### 3.1.11 Object 1014<sub>h</sub>: COB-ID Emergency Object

This object defines the COB-ID of the emergency object (EMCY).

| Object Description |                         |             |            |
|--------------------|-------------------------|-------------|------------|
| Index              | Name                    | Object Type | Data Type  |
| 1014 <sub>h</sub>  | COB-ID emergency object | Variable    | UNSIGNED32 |

Table 29: Object Description (1014<sub>h</sub>)

| Entry Description |        |             |             |                           |
|-------------------|--------|-------------|-------------|---------------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value             |
| 0                 | rw     | no          | UNSIGNED32  | 80 <sub>h</sub> + Node ID |

Table 30: Entry Description (1014<sub>h</sub>)

### 3.1.12 Object 1015<sub>h</sub>: Inhibit Time EMCY

The inhibit time for the EMCY message can be adjusted via this entry. The time has to be a multiple of 100μs.

| Object Description |                         |             |            |
|--------------------|-------------------------|-------------|------------|
| Index              | Name                    | Object Type | Data Type  |
| 1015 <sub>h</sub>  | COB-ID emergency object | Variable    | UNSIGNED16 |

Table 31: Object Description (1015<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED16  | 0             |

Table 32: Entry Description (1015<sub>h</sub>)

### 3.1.13 Object 1016<sub>h</sub>: Consumer Heartbeat Time

The consumer heartbeat time defines the expected heartbeat cycle time and thus has to be higher than the corresponding producer heartbeat time configured on the module producing this heartbeat. The monitoring starts after the reception of the first heartbeat. If the consumer heartbeat time is 0 the corresponding entry is not used. The time has to be a multiple of 1ms.

| Value Definition |                |                            |
|------------------|----------------|----------------------------|
| Bits             | Name           | Definition                 |
| 31...24          | Reserved       | —                          |
| 23...16          | Node ID        | Heartbeat Producer Node ID |
| 15...0           | Heartbeat time | Time in 1ms                |

Table 33: Value Definition (1016<sub>h</sub>)

| Object Description |                         |             |            |
|--------------------|-------------------------|-------------|------------|
| Index              | Name                    | Object Type | Data Type  |
| 1016 <sub>h</sub>  | Consumer heartbeat time | Array       | UNSIGNED32 |

Table 34: Object Description (1016<sub>h</sub>)

| Entry Description |                           |        |             |             |               |
|-------------------|---------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description               | Access | PDO Mapping | Value Range | Default Value |
| 0                 | Number of entries         | ro     | no          | UNSIGNED8   | 1             |
| 1                 | Consumer heartbeat time 1 | rw     | no          | UNSIGNED32  | 0             |

Table 35: Entry Description (1016<sub>h</sub>)

### 3.1.14 Object 1017<sub>h</sub>: Producer Heartbeat Time

The producer heartbeat time defines the cycle time of the heartbeat. The producer heartbeat time is 0 if it is not used. The time has to be a multiple of 1ms.

| Object Description |                         |             |            |
|--------------------|-------------------------|-------------|------------|
| Index              | Name                    | Object Type | Data Type  |
| 1017 <sub>h</sub>  | Producer heartbeat time | Variable    | UNSIGNED16 |

Table 36: Object Description (1017<sub>h</sub>)



| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED16  | 0             |

Table 37: Entry Description (1017<sub>h</sub>)

### 3.1.15 Object 1018<sub>h</sub>: Identity Object

The object 1018<sub>h</sub> contains general information about the device:

- The vendor ID (sub-index 01<sub>h</sub>) contains a unique value allocated to each manufacturer. The vendor ID of Trinamic is 286<sub>h</sub>.
- The manufacturer specific product code (sub-index 2<sub>h</sub>) identifies a specific device version.
- The manufacturer specific revision number (sub-index 3<sub>h</sub>) consists of a major revision number and a minor revision number.

| Object Description |                 |             |           |
|--------------------|-----------------|-------------|-----------|
| Index              | Name            | Object Type | Data Type |
| 1018 <sub>h</sub>  | Identity object | Record      | Identity  |

Table 38: Object Description (1018<sub>h</sub>)

| Entry Description |                   |        |             |             |                                         |
|-------------------|-------------------|--------|-------------|-------------|-----------------------------------------|
| Sub-index         | Description       | Access | PDO Mapping | Value Range | Default Value                           |
| 00 <sub>h</sub>   | Number of entries | ro     | no          | 0...3       | 3                                       |
| 01 <sub>h</sub>   | Vendor ID         | ro     | no          | UNSIGNED32  | 0286 <sub>h</sub>                       |
| 02 <sub>h</sub>   | Product code      | ro     | no          | UNSIGNED32  | 1180                                    |
| 03 <sub>h</sub>   | Revision number   | ro     | no          | UNSIGNED32  | e.g. 20003 <sub>h</sub> for version 2.3 |

Table 39: Entry Description (1018<sub>h</sub>)

### 3.1.16 Object 1023<sub>h</sub>: OS Command

After switching to TMCL command mode using object 2700<sub>h</sub>, this object can be used to send TMCL commands to the PD-1180 module. A TMCL command can be written to sub-index 1. After the command has been executed, the status code and the TMCL reply can be read from sub-index 2 and sub-index 3.

| Object Description |            |             |           |
|--------------------|------------|-------------|-----------|
| Index              | Name       | Object Type | Data Type |
| 1023 <sub>h</sub>  | OS Command | Record      | Command   |

Table 40: Object Description (1023<sub>h</sub>)

| Entry Description |                   |        |             |                        |               |
|-------------------|-------------------|--------|-------------|------------------------|---------------|
| Sub-index         | Description       | Access | PDO Mapping | Value Range            | Default Value |
| 00 <sub>h</sub>   | Number of entries | ro     | no          | —                      | 3             |
| 01 <sub>h</sub>   | TMCL command      | rw     | no          | Octet string (7 bytes) | —             |
| 02 <sub>h</sub>   | Reply             | ro     | no          | UNSIGNED8              | —             |
| 03 <sub>h</sub>   | TMCL reply        | ro     | no          | Octet string (7 bytes) | —             |

Table 41: Entry Description (1023<sub>h</sub>)

### 3.1.17 Object 1029<sub>h</sub>: Error Behaviour

If a device failure is detected in operational state, the device can be configured to enter alternatively the stopped state or remain in the current state in case of a device failure. Device failures include the following errors:

- Communication error
- Application error

| Object Description |                 |             |           |
|--------------------|-----------------|-------------|-----------|
| Index              | Name            | Object Type | Data Type |
| 1029 <sub>h</sub>  | Error behaviour | Array       | UNSIGNED8 |

Table 42: Object Description (1029<sub>h</sub>)

| Entry Description |                         |        |             |             |                             |
|-------------------|-------------------------|--------|-------------|-------------|-----------------------------|
| Sub-index         | Description             | Access | PDO Mapping | Value Range | Default Value               |
| 00 <sub>h</sub>   | Number of error classes | ro     | no          | —           | 2                           |
| 01 <sub>h</sub>   | Communication error     | rw     | no          | UNSIGNED8   | 0 (enter stopped state)     |
| 02 <sub>h</sub>   | Application error       | rw     | no          | UNSIGNED8   | 1 (remain in current state) |

Table 43: Entry Description (1029<sub>h</sub>)

### 3.1.18 Objects 1400<sub>h</sub> – 1403<sub>h</sub>: Receive PDO Communication Parameter

This object contains the communication parameters for the RPDOs which the device is able to receive. The sub-index 00<sub>h</sub> contains the number of valid entries within the communication record. Its value normally is 2, as this object consists of two other entries.

Sub-index 01<sub>h</sub> contains the COB-ID used by this PDO (in bits 10...0). Bit 30 (RTR bit) defines if this PDO uses RTRs. As RTRs are not supported for PDOs by this CANopen implementation, this bit must always be set in order to turn off RTR support for this PDO. Bit 31 defines if this PDO is active or not. If this bit is set, the PDO is inactive, and if this bit is clear, the PDO is active. Before making any changes to a PDO definition, set this bit to inactivate the PDO.



Sub-Index 02<sub>h</sub> contains the transmission type of the RPDO. This can be FF<sub>h</sub> or FE<sub>h</sub> for event-driven, or 00<sub>h</sub> for synchronous.

| Object Description                    |                       |             |              |
|---------------------------------------|-----------------------|-------------|--------------|
| Index                                 | Name                  | Object Type | Data Type    |
| 1400 <sub>h</sub> – 1403 <sub>h</sub> | Receive PDO parameter | RECORD      | RPDO CommPar |
| 1400 <sub>h</sub>                     | RPDO 1                | RECORD      | RPDO CommPar |
| 1401 <sub>h</sub>                     | RPDO 2                | RECORD      | RPDO CommPar |
| 1402 <sub>h</sub>                     | RPDO 3                | RECORD      | RPDO CommPar |
| 1403 <sub>h</sub>                     | RPDO 4                | RECORD      | RPDO CommPar |

Table 44: Object Description (1400<sub>h</sub>)

| Entry Description |                             |        |             |                                                                                                                                                                                                                              |
|-------------------|-----------------------------|--------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sub-index         | Description                 | Access | Value Range | Default Value                                                                                                                                                                                                                |
| 00 <sub>h</sub>   | Largest sub-index supported | ro     | 2           | 2                                                                                                                                                                                                                            |
| 01 <sub>h</sub>   | COB-ID used by PDO          | rw     | UNSIGNED32  | Index 1400 <sub>h</sub> : 200 <sub>h</sub> + Node-ID<br>Index 1401 <sub>h</sub> : 300 <sub>h</sub> + Node-ID<br>Index 1402 <sub>h</sub> : 400 <sub>h</sub> + Node-ID<br>Index 1403 <sub>h</sub> : 500 <sub>h</sub> + Node-ID |
| 02 <sub>h</sub>   | Transmission type           | rw     | UNSIGNED8   | Index 1400 <sub>h</sub> : FF <sub>h</sub><br>Index 1401 <sub>h</sub> : FF <sub>h</sub><br>Index 1402 <sub>h</sub> : FF <sub>h</sub><br>Index 1403 <sub>h</sub> : FE <sub>h</sub>                                             |

Table 45: Entry Description (1400<sub>h</sub>)

### 3.1.19 Objects 1600<sub>h</sub> – 1603<sub>h</sub>: Receive PDO Mapping Parameter

These objects contain the mapping parameters for the RPDOs the device is able to receive. The sub-index 00<sub>h</sub> contains the number of valid entries within the mapping record. This number of entries is also the number of the application variables which shall be received with the corresponding RPDO. The sub-indices from 01<sub>h</sub> to the number of entries contain the information about the mapped application variables. These entries describe the PDO contents by their index, sub-index and length.



| Object Description                    |                               |             |             |
|---------------------------------------|-------------------------------|-------------|-------------|
| Index                                 | Name                          | Object Type | Data Type   |
| 1600 <sub>h</sub> – 1603 <sub>h</sub> | Receive PDO mapping parameter | RECORD      | PDO Mapping |
| 1600 <sub>h</sub>                     | RPDO 1                        | RECORD      | PDO Mapping |
| 1601 <sub>h</sub>                     | RPDO 2                        | RECORD      | PDO Mapping |
| 1602 <sub>h</sub>                     | RPDO 3                        | RECORD      | PDO Mapping |
| 1603 <sub>h</sub>                     | RPDO 4                        | RECORD      | PDO Mapping |

Table 46: Object Description (1600<sub>h</sub>)

| Entry Description |                                             |        |             |                                                                                                                                                                                                          |
|-------------------|---------------------------------------------|--------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sub-index         | Description                                 | Access | Value Range | Default Value                                                                                                                                                                                            |
| 00 <sub>h</sub>   | Number of mapped application objects in PDO | rw     | 0...3       | Index 1600 <sub>h</sub> : 1<br>Index 1601 <sub>h</sub> : 2<br>Index 1602 <sub>h</sub> : 2<br>Index 1603 <sub>h</sub> : 2                                                                                 |
| 01 <sub>h</sub>   | Mapping entry 1                             | rw     | UNSIGNED32  | Index 1600 <sub>h</sub> : 60400010 <sub>h</sub><br>Index 1601 <sub>h</sub> : 60400010 <sub>h</sub><br>Index 1602 <sub>h</sub> : 60400010 <sub>h</sub><br>Index 1603 <sub>h</sub> : 60400010 <sub>h</sub> |
| 02 <sub>h</sub>   | Mapping entry 2                             | rw     | UNSIGNED32  | Index 1600 <sub>h</sub> : 0<br>Index 1601 <sub>h</sub> : 60600008 <sub>h</sub><br>Index 1602 <sub>h</sub> : 607A0020 <sub>h</sub><br>Index 1603 <sub>h</sub> : 60FF0020 <sub>h</sub>                     |
| 03 <sub>h</sub>   | Mapping entry 3                             | rw     | UNSIGNED32  | Index 1600 <sub>h</sub> : 0 <sub>h</sub><br>Index 1601 <sub>h</sub> : 0 <sub>h</sub><br>Index 1602 <sub>h</sub> : 0 <sub>h</sub><br>Index 1603 <sub>h</sub> : 0 <sub>h</sub>                             |

Table 47: Entry Description (1600<sub>h</sub>)

Before making changes to PDO definitions, first mark the PDO as inactive by setting bit 31 of its COB-ID (see section 3.1.18). Then, set its number of mapped PDO entries to zero (sub-index 0 of the appropriate PDO mapping object). Now, the mappings themselves can be changed. After that, set the number of mapped objects to the desired value, and finally activate the PDO by clearing bit 31 of its COB-ID.

### 3.1.20 Objects 1800<sub>h</sub> – 1803<sub>h</sub>: Transmit PDO Communication Parameter

This object contains the communication parameters for the TPDOs which the device is able to transmit. The sub-index 00<sub>h</sub> contains the number of valid entries within the communication record. Its value normally is 5, as this object consists of five other entries.

Sub-index 01<sub>h</sub> contains the COB-ID used by this PDO (in bits 10...0). Bit 30 (RTR bit) defines if this PDO uses RTRs. As RTRs are not supported for PDOs by this CANopen implementation, this bit must always be set in order to turn off RTR support for this PDO. Bit 31 defines if this PDO is active or not. If this bit is set, the PDO is inactive, and if this bit is clear, the PDO is active. Before making any changes to a PDO



definition, set this bit to inactivate the PDO.

Sub-index 02<sub>h</sub> contains the transmission type of the RPDO. This can be FF<sub>h</sub> or FE<sub>h</sub> for event-driven, or 00<sub>h</sub> or 01<sub>h</sub> for synchronous.

Sub-index 03<sub>h</sub> contains the inhibit time, given in milliseconds. After a TPDO has been sent, it will not be sent again before the inhibit time has elapsed.

Sub-index 04<sub>h</sub> is not used.

Sub-index 05<sub>h</sub> contains the event timer value in milliseconds. When this is set to a value greater than 0 the TPDO will be sent repeatedly each time the event timer has elapsed. For example, when this value is set to 250, the TPDO will be sent every 250ms.

| Object Description                    |                                      |             |              |
|---------------------------------------|--------------------------------------|-------------|--------------|
| Index                                 | Name                                 | Object Type | Data Type    |
| 1800 <sub>h</sub> – 1803 <sub>h</sub> | Transmit PDO communication parameter | RECORD      | TPDO CommPar |
| 1800 <sub>h</sub>                     | TPDO 1                               | RECORD      | TPDO CommPar |
| 1801 <sub>h</sub>                     | TPDO 2                               | RECORD      | TPDO CommPar |
| 1802 <sub>h</sub>                     | TPDO 3                               | RECORD      | TPDO CommPar |
| 1803 <sub>h</sub>                     | TPDO 4                               | RECORD      | TPDO CommPar |

Table 48: Object Description (1800<sub>h</sub>)

| Entry Description |                             |        |             |                                                                                                                                                                                                                              |
|-------------------|-----------------------------|--------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sub-index         | Description                 | Access | Value Range | Default Value                                                                                                                                                                                                                |
| 00 <sub>h</sub>   | Largest sub-index supported | ro     | 5           | 5                                                                                                                                                                                                                            |
| 01 <sub>h</sub>   | COB-ID                      | rw     | UNSIGNED32  | Index 1800 <sub>h</sub> : 180 <sub>h</sub> + Node-ID<br>Index 1801 <sub>h</sub> : 280 <sub>h</sub> + Node-ID<br>Index 1802 <sub>h</sub> : 380 <sub>h</sub> + Node-ID<br>Index 1803 <sub>h</sub> : 480 <sub>h</sub> + Node-ID |
| 02 <sub>h</sub>   | Transmission type           | rw     | UNSIGNED8   | Index 1800 <sub>h</sub> : FF <sub>h</sub><br>Index 1801 <sub>h</sub> : FF <sub>h</sub><br>Index 1802 <sub>h</sub> : 01 <sub>h</sub><br>Index 1803 <sub>h</sub> : 01 <sub>h</sub>                                             |
| 03 <sub>h</sub>   | Inhibit time                | rw     | UNSIGNED16  | 0                                                                                                                                                                                                                            |
| 04 <sub>h</sub>   | Compatibility entry         | ro     | UNSIGNED8   | 0                                                                                                                                                                                                                            |
| 05 <sub>h</sub>   | Event timer                 | rw     | UNSIGNED16  | 0                                                                                                                                                                                                                            |

Table 49: Entry Description (1800<sub>h</sub>)



### 3.1.21 Objects 1A00<sub>h</sub> – 1A03<sub>h</sub>: Transmit PDO Mapping Parameter

These objects contain the mapping parameters for the TPDOs the device is able to transmit. The sub-index 00<sub>h</sub> contains the number of valid entries within the mapping record. This number of entries is also the number of the application variables which shall be transmitted with the corresponding TPDO. The sub-indices from 01<sub>h</sub> to the number of entries contain the information about the mapped application variables. These entries describe the PDO contents by their index, sub-index and length.

| Object Description                    |                                |             |             |
|---------------------------------------|--------------------------------|-------------|-------------|
| Index                                 | Name                           | Object Type | Data Type   |
| 1A00 <sub>h</sub> – 1A03 <sub>h</sub> | Transmit PDO mapping parameter | RECORD      | PDO Mapping |
| 1A00 <sub>h</sub>                     | TPDO 1                         | RECORD      | PDO Mapping |
| 1A01 <sub>h</sub>                     | TPDO 2                         | RECORD      | PDO Mapping |
| 1A02 <sub>h</sub>                     | TPDO 3                         | RECORD      | PDO Mapping |
| 1A03 <sub>h</sub>                     | TPDO 4                         | RECORD      | PDO Mapping |

Table 50: Object Description (1A00<sub>h</sub>)

| Entry Description |                                             |        |             |                                                                                                                                                                                                          |
|-------------------|---------------------------------------------|--------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sub-index         | Description                                 | Access | Value Range | Default Value                                                                                                                                                                                            |
| 00 <sub>h</sub>   | Number of mapped application objects in PDO | rw     | 0...3       | Index 1A00 <sub>h</sub> : 1<br>Index 1A01 <sub>h</sub> : 2<br>Index 1A02 <sub>h</sub> : 2<br>Index 1A03 <sub>h</sub> : 2                                                                                 |
| 01 <sub>h</sub>   | Mapping entry 1                             | rw     | UNSIGNED32  | Index 1A00 <sub>h</sub> : 60410010 <sub>h</sub><br>Index 1A01 <sub>h</sub> : 60410010 <sub>h</sub><br>Index 1A02 <sub>h</sub> : 60410010 <sub>h</sub><br>Index 1A03 <sub>h</sub> : 60410010 <sub>h</sub> |
| 02 <sub>h</sub>   | Mapping entry 2                             | rw     | UNSIGNED32  | Index 1A00 <sub>h</sub> : 0<br>Index 1A01 <sub>h</sub> : 60610008 <sub>h</sub><br>Index 1A02 <sub>h</sub> : 60640020 <sub>h</sub><br>Index 1A03 <sub>h</sub> : 606C0020 <sub>h</sub>                     |
| 03 <sub>h</sub>   | Mapping entry 3                             | rw     | UNSIGNED32  | Index 1A00 <sub>h</sub> : 0 <sub>h</sub><br>Index 1A01 <sub>h</sub> : 0 <sub>h</sub><br>Index 1A02 <sub>h</sub> : 0 <sub>h</sub><br>Index 1A03 <sub>h</sub> : 0 <sub>h</sub>                             |

Table 51: Entry Description (1A00<sub>h</sub>)

Before making changes to PDO definitions, first mark the PDO as inactive by setting bit 31 of its COB-ID (see section 3.1.20). Then, set its number of mapped PDO entries to zero (sub-index 0 of the appropriate PDO mapping object). Now, the mappings themselves can be changed. After that, set the number of mapped objects to the desired value, and finally activate the PDO by clearing bit 31 of its COB-ID.



## 4 Manufacturer specific Area

The manufacturer segment contains manufacturer specific objects. These objects control the special features of the Trinamic Motion Control device PD-1180.

## 4.1 Objects related to CoolStep™

Figure 6 shows an overview of the CoolStep™ related objects for motor #0. Please bear in mind that the figure only shows one example for a drive. There are objects which concern the configuration of the current. Other objects are for velocity regulation and for time adjustment. The CoolStep™ feature is sometimes also called SmartEnergy.

The following adjustments have to be made:

- Thresholds for current and velocity have to be identified and set.
- The StallGuard2™ feature has to be adjusted and enabled.
- The reduction or increasing of the current in the CoolStep™ area (depending on the load) has to be configured.

## coolStep™ adjustment points and thresholds

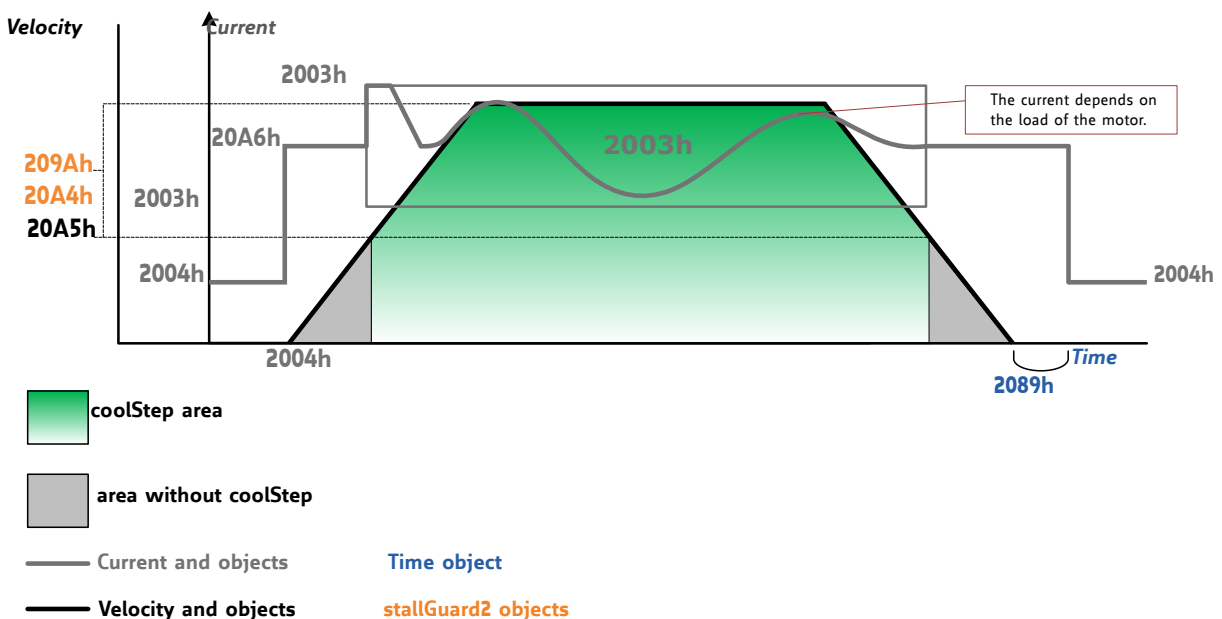


Figure 6: CoolStep Adjustment Points and Thresholds



| CoolStep Adjustment Objects |                               |                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Object                      | Name                          | Description                                                                                                                                                                                                                                                                                                                          |
| 2003 <sub>h</sub>           | Absolute maximum current      | The maximum value is 255. This value means 100% of the maximum current of the module. The current adjustment is within the range 0...255 and can be adjusted in 32 steps (0...255 divided by eight; step 0 = 0...7, step 1 = 8...15 and so on).<br>The most important motor setting, since too high values might cause motor damage! |
| 2004 <sub>h</sub>           | Standby current               | The current limit two seconds after the motor has stopped.                                                                                                                                                                                                                                                                           |
| 2098 <sub>h</sub>           | SmartEnergy current minimum   | Sets the lower motor current limit for CoolStep operation by scaling the run current (object 2003 <sub>h</sub> ) value.<br>This can be:<br>0: for 1/2 of the run current<br>1: for 1/4 of the run current                                                                                                                            |
| 2099 <sub>h</sub>           | SmartEnergy current down step | Sets the speed of current decrement when the StallGuard2 reading is above the upper threshold.<br>0: slow decrement<br>3: fast decrement                                                                                                                                                                                             |
| 209B <sub>h</sub>           | SmartEnergy current up step   | Sets the current increment step when the StallGuard2 below the lower threshold.<br>0: slow increment<br>3: fast increment / fast reaction to rising load                                                                                                                                                                             |
| 209A <sub>h</sub>           | SmartEnergy hysteresis        | Sets the distance between the lower and the upper threshold for StallGuard2 reading. Above the upper threshold the motor current becomes decreased.                                                                                                                                                                                  |
| 20A4 <sub>h</sub>           | Stop on stall                 | Below this speed the motor will not be stopped. Above this speed the motor will stop in case StallGuard2 load value reaches zero.                                                                                                                                                                                                    |
| 20A5 <sub>h</sub>           | SmartEnergy threshold speed.  | Above this speed CoolStep becomes enabled.                                                                                                                                                                                                                                                                                           |
| 2089 <sub>h</sub>           | Standby delay                 | Standstill period before the current is changed down to standby current. The standard value is 200 which is 2 seconds.                                                                                                                                                                                                               |

Table 52: CoolStep related Objects



## 4.2 Detailed Object Specifications

### 4.2.1 Object 2000<sub>h</sub>: Microstep Resolution

This object sets the microstep resolution of the drive. A value of 8 selects 256 ( $2^8$ ) microsteps per full step.

| Object Description |                      |             |           |
|--------------------|----------------------|-------------|-----------|
| Index              | Name                 | Object Type | Data Type |
| 2000 <sub>h</sub>  | Microstep Resolution | Variable    | UNSIGNED8 |

Table 53: Object Description (2000<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...8       | 8             |

Table 54: Entry Description (2000<sub>h</sub>)

### 4.2.2 Object 2001<sub>h</sub>: Fullstep Resolution

This object sets the fullstep resolution of the motor connected to the drive. Its default value is 200 because most motors are 1.8° motors.

| Object Description |                            |             |            |
|--------------------|----------------------------|-------------|------------|
| Index              | Name                       | Object Type | Data Type  |
| 2001 <sub>h</sub>  | Motor full step resolution | Variable    | UNSIGNED16 |

Table 55: Object Description (2001<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...65535   | 200           |

Table 56: Entry Description (2001<sub>h</sub>)

### 4.2.3 Object 2002<sub>h</sub>: Brake Delay Times

With this object the delay times for applying and releasing an (optional) brake can be defined. Please see also object 200A<sub>h</sub> for an additional delay between enabling the power stage and releasing the brake. Both times are given in ms.



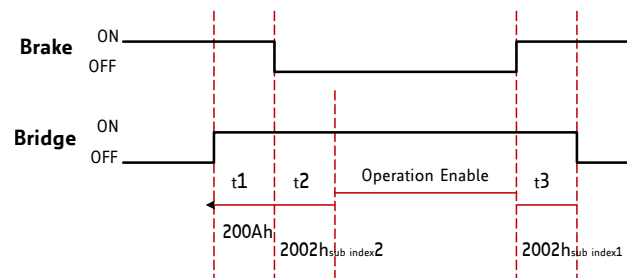


Figure 7: Brake Output Timing

| Object Description |                   |             |            |
|--------------------|-------------------|-------------|------------|
| Index              | Name              | Object Type | Data Type  |
| 2002 <sub>h</sub>  | Brake delay times | Array       | UNSIGNED16 |

Table 57: Object Description (2002<sub>h</sub>)

| Entry Description |                                                                           |        |             |             |               |
|-------------------|---------------------------------------------------------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description                                                               | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Time between applying brake / disabling power stage                       | rw     | no          | 0...65535   | 0             |
| 2                 | Time between releasing brake / switching the state machine to operational | rw     | no          | 0..65535    | 0             |

Table 58: Entry Description (2002<sub>h</sub>)

#### 4.2.4 Object 2003<sub>h</sub>: Maximum Current

This object defines the current used when the motor is moving. A value of 255 means 100% of the maximum current of the drive.

| Object Description |                 |             |           |
|--------------------|-----------------|-------------|-----------|
| Index              | Name            | Object Type | Data Type |
| 2003 <sub>h</sub>  | Maximum current | Variable    | UNSIGNED8 |

Table 59: Object Description (2003<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...255     | 128           |

Table 60: Entry Description (2003<sub>h</sub>)

#### 4.2.5 Object 2004<sub>h</sub>: Standby Current

This object defines the current used when the motor is standing (two seconds after the last move). A value of 255 means 100% of the maximum current of the drive.

| Object Description |                 |             |           |
|--------------------|-----------------|-------------|-----------|
| Index              | Name            | Object Type | Data Type |
| 2004 <sub>h</sub>  | Maximum current | Variable    | UNSIGNED8 |

Table 61: Object Description (2004<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...255     | 8             |

Table 62: Entry Description (2004<sub>h</sub>)

#### 4.2.6 Object 2005<sub>h</sub>: Limit Switches

This object defines which limit switches are to be used. Bit 0 stands for the left and bit 1 stands for the right limit switch. If a bit is set, the corresponding limit switch will not be used. So this object has to be set to the value 3 if limit switches are not connected. The object can only be written when the drive is in the SWITCHED\_ON\_DISABLED state (but is always readable).

The limit switches can also be inverted using bit 2 and bit 3:

- Bit 2 inverts the left limit switch
- Bit 3 inverts the right limit switch

The polarity of the home switch can be set using bit 5. Furthermore, the functionality of the shutdown input can be controlled using bit 6. If this bit is set then the CiA-402 state machine also reacts on the shutdown input (it will change to FAULT state if a shutdown is detected).

| Object Description |                |             |            |
|--------------------|----------------|-------------|------------|
| Index              | Name           | Object Type | Data Type  |
| 2005 <sub>h</sub>  | Limit switches | Variable    | UNSIGNED32 |

Table 63: Object Description (2005<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...127     | 0             |

Table 64: Entry Description (2005<sub>h</sub>)



| Bit Definitions |                                        |
|-----------------|----------------------------------------|
| Bit             | Definition                             |
| 0               | Left limit switch deactivated if set.  |
| 1               | Right limit switch deactivated if set. |
| 2               | Left limit switch inverted if set.     |
| 3               | Right limit switch inverted if set.    |
| 4               | Home switch deactivated if set.        |
| 5               | Home switch inverted if set.           |
| 6               | Shutdown input enabled if set.         |

Table 65: Bit Definitions (2005<sub>h</sub>)

#### 4.2.7 Object 200A<sub>h</sub>: Enable Drive Delay Time

This is an additional delay time (in milliseconds) between enabling the power stage and releasing the brake. It can be used to prevent the brake from being released too early (before the hold current in the motor has been reached). Please see also object 4.2.3.

| Object Description |                         |             |            |
|--------------------|-------------------------|-------------|------------|
| Index              | Name                    | Object Type | Data Type  |
| 200A <sub>h</sub>  | Enable drive delay time | Variable    | UNSIGNED16 |

Table 66: Object Description (200A<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...65535   | 0             |

Table 67: Entry Description (200A<sub>h</sub>)

#### 4.2.8 Object 200B<sub>h</sub>: Encoder Parameters

This object defines encoder parameters. These are the direction of rotation for external encoders (set to 1 if the direction is reversed compared to the motor) and if the position is to be initialized with the encoder position. The object is only writable in SWITCHED\_ON\_DISABLED state.

| Object Description |                    |             |           |
|--------------------|--------------------|-------------|-----------|
| Index              | Name               | Object Type | Data Type |
| 200B <sub>h</sub>  | Encoder parameters | Array       | UNSIGNED8 |

Table 68: Object Description (200B<sub>h</sub>)

| Entry Description |                                                   |        |             |             |               |
|-------------------|---------------------------------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description                                       | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Not used                                          | rw     | no          | —           | —             |
| 2                 | Direction of rotation<br>(external encoders only) | rw     | no          | 0/1         | 0             |
| 3                 | Initialize position                               | rw     | no          | 0/1         | 1             |

Table 69: Entry Description (200B<sub>h</sub>)

#### 4.2.9 Object 200C<sub>h</sub>: Brake Current Feed

This object configures how much current has to be fed into the brake to apply and to release it. 0 means 0%, 255 means 100% of the maximum current (this depends on the module). In most cases it is needed to feed current into the brake to release it. Setting both values to 0 disables the automatic brake control. This object is only writable in SWITCHED\_ON\_DISABLED state.

| Object Description |                    |             |           |
|--------------------|--------------------|-------------|-----------|
| Index              | Name               | Object Type | Data Type |
| 200C <sub>h</sub>  | Brake current feed | Array       | UNSIGNED8 |

Table 70: Object Description (200C<sub>h</sub>)

| Entry Description |                 |        |             |             |               |
|-------------------|-----------------|--------|-------------|-------------|---------------|
| Sub-index         | Description     | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Apply current   | rw     | no          | 0...255     | 0             |
| 2                 | Release current | rw     | no          | 0...255     | 0             |

Table 71: Entry Description (200C<sub>h</sub>)

#### 4.2.10 Object 2085<sub>h</sub>: Ramp Divisor

Use this object to define the ramp divisor when internal units are selected for velocity and acceleration. Writing to this object is only possible in SWITCHED\_ON\_DISABLED state. The acceleration pre-scaler should be decremented or incremented carefully (in steps of one).

| Object Description |              |             |           |
|--------------------|--------------|-------------|-----------|
| Index              | Name         | Object Type | Data Type |
| 2085 <sub>h</sub>  | Ramp Divisor | Variable    | UNSIGNED8 |

Table 72: Object Description (2085<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0 ... 13    | 0             |

Table 73: Entry Description (2085<sub>h</sub>)

#### 4.2.11 Object 2086<sub>h</sub>: Pulse Divisor

Use this object to define the pulse divisor when internal units are selected for velocity and acceleration. Writing to this object is only possible in SWITCHED\_ON\_DISABLED state. The velocity pre-scaler should be decremented or incremented carefully (in steps of one).

| Object Description |              |             |           |
|--------------------|--------------|-------------|-----------|
| Index              | Name         | Object Type | Data Type |
| 2086 <sub>h</sub>  | Ramp Divisor | Variable    | UNSIGNED8 |

Table 74: Object Description (2086<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0 ... 13    | 0             |

Table 75: Entry Description (2086<sub>h</sub>)

#### 4.2.12 Object 2087<sub>h</sub>: Maximum Velocity

The functionality of this object depends on the unit selection (refer to object 208C<sub>h</sub>).

- If internal units are selected this object will be set to the fixed value of 2047 and cannot be changed.
- If user units are selected the maximum velocity (RPM or PPS) that is to be used must be set here. A lower value in this object leads to a better accuracy of the unit conversion.

This value can only be changed when the drive is in SWITCHED\_ON\_DISABLED state.

| Object Description |              |             |            |
|--------------------|--------------|-------------|------------|
| Index              | Name         | Object Type | Data Type  |
| 2087 <sub>h</sub>  | Ramp Divisor | Variable    | UNSIGNED32 |

Table 76: Object Description (2087<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...2047    | 0             |

Table 77: Entry Description (2087<sub>h</sub>)

#### 4.2.13 Object 2088<sub>h</sub>: Maximum Acceleration

The functionality of this object depends on the unit selection (refer to object 208E<sub>h</sub>).

- If internal units are selected this object will be set to the fixed value of 2047 and cannot be changed.
- If user units are selected the maximum velocity (RPM or PPS) that is to be used must be set here. A lower value in this object leads to a better accuracy of the unit conversion.

This value can only be changed when the drive is in SWITCHED\_ON\_DISABLED state.

| Object Description |              |             |            |
|--------------------|--------------|-------------|------------|
| Index              | Name         | Object Type | Data Type  |
| 2088 <sub>h</sub>  | Ramp Divisor | Variable    | UNSIGNED32 |

Table 78: Object Description (2088<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...2047    | 0             |

Table 79: Entry Description (2088<sub>h</sub>)

#### 4.2.14 Object 2089<sub>h</sub>: Standby Delay

This object can be used for setting a standstill period before the current is changed down to standby current.

**Unit:** 10msec

| Object Description |               |             |            |
|--------------------|---------------|-------------|------------|
| Index              | Name          | Object Type | Data Type  |
| 2089 <sub>h</sub>  | Setting Delay | Variable    | UNSIGNED16 |

Table 80: Object Description (2089<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...65535   | 0             |

Table 81: Entry Description (2089<sub>h</sub>)

#### 4.2.15 Object 208C<sub>h</sub>: Velocity Dimension Index

With this object different units can be chosen:

- Writing 0 selects internal units.
- Writing 164 selects RPM for velocity and RPM/s for acceleration.
- Writing 181 selects PPS for velocity and PPS/s for acceleration.

This can only be changed in SWITCHED\_ON\_DISABLED mode.

| Object Description |                          |             |           |
|--------------------|--------------------------|-------------|-----------|
| Index              | Name                     | Object Type | Data Type |
| 208C <sub>h</sub>  | Velocity Dimension Index | Variable    | UNSIGNED8 |

Table 82: Object Description (208C<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0/164/181   | 0             |

Table 83: Entry Description (208C<sub>h</sub>)

#### 4.2.16 Object 208E<sub>h</sub>: Acceleration Dimension Index

With this object, the unit used for acceleration can be read out. The unit can be set using object 208C<sub>h</sub>.

- Object 208E<sub>h</sub> reads 0 when internal units are selected.
- Object 208E<sub>h</sub> reads 177 when RPM/s is selected.
- Object 208E<sub>h</sub> reads 179 when PPS/s is selected.

| Object Description |                              |             |           |
|--------------------|------------------------------|-------------|-----------|
| Index              | Name                         | Object Type | Data Type |
| 208E <sub>h</sub>  | Acceleration Dimension Index | Variable    | UNSIGNED8 |

Table 84: Object Description (208E<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | no          | 0/177/179   | 0             |

Table 85: Entry Description (208E<sub>h</sub>)

#### 4.2.17 Object 2092<sub>h</sub>: Chopper Blank Time

This object serves for selecting the comparator blank time. This time needs to safely cover the switching event and the duration of the ringing on the sense resistor. For low current drivers, a setting of 1 or 2 is good. For higher current applications a setting of 2 or 3 will be required.

| Object Description |                    |             |           |
|--------------------|--------------------|-------------|-----------|
| Index              | Name               | Object Type | Data Type |
| 2092 <sub>h</sub>  | Chopper Blank Time | Variable    | UNSIGNED8 |

Table 86: Object Description (2092<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...3       | 2             |

Table 87: Entry Description (2092<sub>h</sub>)

#### 4.2.18 Object 2093<sub>h</sub>: Chopper Mode

Select the chopper mode using this object:

- 0 – spreadCycle chopper
- 1 – classic constant off time chopper

| Object Description |              |             |           |
|--------------------|--------------|-------------|-----------|
| Index              | Name         | Object Type | Data Type |
| 2093 <sub>h</sub>  | Chopper Mode | Variable    | UNSIGNED8 |

Table 88: Object Description (2093<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0/1         | 0             |

Table 89: Entry Description (2093<sub>h</sub>)

#### 4.2.19 Object 2094<sub>h</sub>: Chopper Hysteresis Decrement

This object serves for the hysteresis decrement setting. This setting determines the slope of the hysteresis during on time and during fast decay time.

- 0 – fast decrement
- 3 – very slow decrement

| Object Description |                              |             |           |
|--------------------|------------------------------|-------------|-----------|
| Index              | Name                         | Object Type | Data Type |
| 2094 <sub>h</sub>  | Chopper Hysteresis Decrement | Variable    | UNSIGNED8 |

Table 90: Object Description (2094<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...3       | 0             |

Table 91: Entry Description (2094<sub>h</sub>)

#### 4.2.20 Object 2095<sub>h</sub>: Chopper Hysteresis End

This object provides the setting of the hysteresis end value after a number of decrements. The decrement interval time is controlled by object 2094<sub>h</sub> (section 4.2.19).

Possible values are:

- -3...-1 – negative hysteresis end setting
- 0 – zero hysteresis end setting
- 1...12 – positive hysteresis end setting

| Object Description |                        |             |           |
|--------------------|------------------------|-------------|-----------|
| Index              | Name                   | Object Type | Data Type |
| 2095 <sub>h</sub>  | Chopper Hysteresis End | Variable    | SIGNED8   |

Table 92: Object Description (2095<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | -3...12     | 0             |

Table 93: Entry Description (2095<sub>h</sub>)



#### 4.2.21 Object 2096<sub>h</sub>: Chopper Hysteresis Start

This object provides the hysteresis start setting. Please notice that this value is an offset to the hysteresis end value.

| Object Description |                          |             |           |
|--------------------|--------------------------|-------------|-----------|
| Index              | Name                     | Object Type | Data Type |
| 2096 <sub>h</sub>  | Chopper Hysteresis Start | Variable    | UNSIGNED8 |

Table 94: Object Description (2096<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...8       | 3             |

Table 95: Entry Description (2096<sub>h</sub>)

#### 4.2.22 Object 2097<sub>h</sub>: Chopper Off Time

The off time setting controls the minimum chopper frequency. Under normal circumstances, an off time within the range of 5μs to 20μs is used. Off time setting for constant  $t_{OFF}$  chopper:  $N_{CLK} = 12 + 32 * t_{OFF}$ . Minimum is 64 clocks.

Setting this parameter to zero completely disables all driver transistors and so lets the motor free-wheel.

| Object Description |                  |             |           |
|--------------------|------------------|-------------|-----------|
| Index              | Name             | Object Type | Data Type |
| 2097 <sub>h</sub>  | Chopper Off Time | Variable    | UNSIGNED8 |

Table 96: Object Description (2097<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0 / 2...15  | 5             |

Table 97: Entry Description (2097<sub>h</sub>)

#### 4.2.23 Object 2098<sub>h</sub>: Smart Energy Current Minimum

This object provides the setting of the lower motor current limit for CoolStep™ operation by scaling the CS value.

Possible values are:

- 0 – 1/2 of maximum motor current setting (section 4.2.4)
- 1 – 1/4 of maximum motor current setting (section 4.2.4)



| Object Description |                              |             |           |
|--------------------|------------------------------|-------------|-----------|
| Index              | Name                         | Object Type | Data Type |
| 2098 <sub>h</sub>  | Smart Energy Current Minimum | Variable    | UNSIGNED8 |

Table 98: Object Description (2098<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0/1         | 0             |

Table 99: Entry Description (2098<sub>h</sub>)

#### 4.2.24 Object 2099<sub>h</sub>: Smart Energy Current Down Step

This object provides the setting of the number of StallGuard2 readings above the upper threshold necessary for each current decrement of the motor current.

Possible values are:

- 0 – 32 measurements – slowest decrement
- 1 – 8 measurements
- 2 – 2 measurements
- 3 – 1 measurements – fastest decrement

| Object Description |                                |             |           |
|--------------------|--------------------------------|-------------|-----------|
| Index              | Name                           | Object Type | Data Type |
| 2099 <sub>h</sub>  | Smart Energy Current Down Step | Variable    | UNSIGNED8 |

Table 100: Object Description (2099<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...3       | 0             |

Table 101: Entry Description (2099<sub>h</sub>)

#### 4.2.25 Object 209A<sub>h</sub>: Smart Energy Hysteresis

This object sets the distance between the lower and the upper threshold for StallGuard2 reading. Above the upper threshold the motor current becomes decreased.

Hysteresis: (SmartEnergy hysteresis value + 1) \* 32

Upper StallGuard2 threshold: (SmartEnergy hysteresis start + SmartEnergy hysteresis + 1) \* 32



| Object Description |                         |             |           |
|--------------------|-------------------------|-------------|-----------|
| Index              | Name                    | Object Type | Data Type |
| 209A <sub>h</sub>  | Smart Energy Hysteresis | Variable    | UNSIGNED8 |

Table 102: Object Description (209A<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...15      | 0             |

Table 103: Entry Description (209A<sub>h</sub>)

#### 4.2.26 Object 209B<sub>h</sub>: Smart Energy Current Up Step

This object sets the current increment step. The current becomes incremented for each measured StallGuard2 value below the lower threshold (see smart energy hysteresis start (object 209C<sub>h</sub>, section 4.2.27).

Possible values are:

- 0 – 1 step – slowest increment
- 1 – 2 steps
- 2 – 4 steps
- 3 – 8 steps – fastest increment

| Object Description |                              |             |           |
|--------------------|------------------------------|-------------|-----------|
| Index              | Name                         | Object Type | Data Type |
| 209B <sub>h</sub>  | Smart Energy Current Up Step | Variable    | UNSIGNED8 |

Table 104: Object Description (209B<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...3       | 0             |

Table 105: Entry Description (209B<sub>h</sub>)

#### 4.2.27 Object 209C<sub>h</sub>: Smart Energy Hysteresis Start

This object serves to set the lower threshold for the StallGuard2 value (see smart Energy current up step (section 4.2.26). Setting this to 0 disables the CoolStep™ function.



| Object Description |                               |             |           |
|--------------------|-------------------------------|-------------|-----------|
| Index              | Name                          | Object Type | Data Type |
| 209C <sub>h</sub>  | Smart Energy Hysteresis Start | Variable    | UNSIGNED8 |

Table 106: Object Description (209C<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...15      | 0             |

Table 107: Entry Description (209C<sub>h</sub>)

#### 4.2.28 Object 209D<sub>h</sub>: Smart Energy Filter Enable

This object is used to set the StallGuard2 filter for more precision of the measurement. It reduces the measurement frequency to one measurement per four fullsteps if set.

In most cases it is expedient to set the filtered mode when using CoolStep™. Use the standard mode for step loss detection.

Possible values are:

- 0 – standard mode
- 1 – filtered mode

| Object Description |                            |             |           |
|--------------------|----------------------------|-------------|-----------|
| Index              | Name                       | Object Type | Data Type |
| 209D <sub>h</sub>  | Smart Energy Filter Enable | Variable    | UNSIGNED8 |

Table 108: Object Description (209D<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0/1         | 0             |

Table 109: Entry Description (209D<sub>h</sub>)

#### 4.2.29 Object 209E<sub>h</sub>: StallGuard2 Threshold

This signed value controls the StallGuard2 threshold level for stall output and sets the optimum measurement range for readout. A lower value gives a higher sensitivity. Zero is the starting value. A higher value makes StallGuard2 less sensitive and requires more torque to indicate a stall.



| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 209E <sub>h</sub>  | StallGuard2 Threshold | Variable    | SIGNED8   |

Table 110: Object Description (209E<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | -63...63    | 0             |

Table 111: Entry Description (209E<sub>h</sub>)

#### 4.2.30 Object 20A1<sub>h</sub>: Short Protection Disable

This object is used to enable or to disable the short to ground protection. Normally there is no need to change this. Use the default value.

Possible values are:

- 0 – Short to GND protection enabled
- 1 – Short to GND protection disabled

| Object Description |                          |             |           |
|--------------------|--------------------------|-------------|-----------|
| Index              | Name                     | Object Type | Data Type |
| 20A1 <sub>h</sub>  | Short Protection Disable | Variable    | UNSIGNED8 |

Table 112: Object Description (20A1<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0/1         | 0             |

Table 113: Entry Description (20A1<sub>h</sub>)

#### 4.2.31 Object 20A4<sub>h</sub>: Stop on Stall

Below this speed the motor will not be stopped. Above this speed the motor will be stopped in case the StallGuard2 load value reaches zero.

| Object Description |               |             |            |
|--------------------|---------------|-------------|------------|
| Index              | Name          | Object Type | Data Type  |
| 20A4 <sub>h</sub>  | Stop on Stall | Variable    | UNSIGNED32 |

Table 114: Object Description (20A4<sub>h</sub>)

| Entry Description |        |             |                |               |
|-------------------|--------|-------------|----------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range    | Default Value |
| 0                 | rw     | no          | 0...2147483647 | 0             |

Table 115: Entry Description (20A4<sub>h</sub>)

#### 4.2.32 Object 20A5<sub>h</sub>: Smart Energy Threshold Speed

The CoolStep™ functionality will be enabled when the actual speed is above this speed. It will be disabled again when the actual speed drops below this value.

| Object Description |                              |             |            |
|--------------------|------------------------------|-------------|------------|
| Index              | Name                         | Object Type | Data Type  |
| 20A5 <sub>h</sub>  | Smart Energy Threshold Speed | Variable    | UNSIGNED32 |

Table 116: Object Description (20A5<sub>h</sub>)

| Entry Description |        |             |                |               |
|-------------------|--------|-------------|----------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range    | Default Value |
| 0                 | rw     | no          | 0...2147483647 | 0             |

Table 117: Entry Description (20A5<sub>h</sub>)

#### 4.2.33 Object 2100<sub>h</sub>: Home Offset Display

This object shows the home offset. The value is given in microsteps.

| Object Description |                     |             |           |
|--------------------|---------------------|-------------|-----------|
| Index              | Name                | Object Type | Data Type |
| 2100 <sub>h</sub>  | Home Offset Display | Variable    | SIGNED32  |

Table 118: Object Description (2100<sub>h</sub>)

| Entry Description |        |             |                          |               |
|-------------------|--------|-------------|--------------------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range              | Default Value |
| 0                 | ro     | no          | -2147483648...2147483647 | 0             |

Table 119: Entry Description (2100<sub>h</sub>)

#### 4.2.34 Object 2101<sub>h</sub>: Actual Load Value

This object shows the actual load value used for stall detection (StallGuard2™).



| Object Description |                   |             |            |
|--------------------|-------------------|-------------|------------|
| Index              | Name              | Object Type | Data Type  |
| 2101 <sub>h</sub>  | Actual Load Value | Variable    | UNSIGNED16 |

Table 120: Object Description (2101<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | no          | 0...1023    | 0             |

Table 121: Entry Description (2101<sub>h</sub>)

#### 4.2.35 Object 2102<sub>h</sub>: Driver Error Flags

This object shows the error flags of the motor driver IC.

| Error Flags |      |                         |
|-------------|------|-------------------------|
| Bit         | Name | Meaning                 |
| 7           | OT   | Overtemperature         |
| 6           | OTPW | Temperature pre-warning |
| 5           | UV   | Undervoltage            |
| 4           | OCHS | Overcurrent high side   |
| 3           | OLB  | Open load on bridge B   |
| 2           | OLA  | Open load on bridge A   |
| 1           | OCB  | Overcurrent on bridge B |
| 0           | OCA  | Overcurrent on bridge A |

Table 122: Driver Error Flags (2102<sub>h</sub>)

| Object Description |                    |             |           |
|--------------------|--------------------|-------------|-----------|
| Index              | Name               | Object Type | Data Type |
| 2102 <sub>h</sub>  | Driver Error Flags | Variable    | UNSIGNED8 |

Table 123: Object Description (2102<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | no          | 0...255     | 0             |

Table 124: Entry Description (2102<sub>h</sub>)

#### 4.2.36 Object 2107<sub>h</sub>: Microstep Resolution Display

This object shows the microstep resolution, set by object 2000<sub>h</sub> (please see section 4.2.1).

| Object Description |                              |             |           |
|--------------------|------------------------------|-------------|-----------|
| Index              | Name                         | Object Type | Data Type |
| 2107 <sub>h</sub>  | Microstep resolution display | Variable    | UNSIGNED8 |

Table 125: Object Description (2107<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | no          | 0...8       | 8             |

Table 126: Entry Description (2107<sub>h</sub>)

#### 4.2.37 Object 210B<sub>h</sub>: Step Counter

This object shows the overall number of microsteps done by this motor so far. The value can be read as a 64 bit value (sub-index 3) or split into two 32 bit values (sub-index 1 and sub-index 2).

| Object Description |              |             |           |
|--------------------|--------------|-------------|-----------|
| Index              | Name         | Object Type | Data Type |
| 210B <sub>h</sub>  | Step Counter | Variable    | RECORD    |

Table 127: Object Description (210B<sub>h</sub>)

| Entry Description |                |        |             |                                 |               |
|-------------------|----------------|--------|-------------|---------------------------------|---------------|
| Sub-index         | Description    | Access | PDO Mapping | Value Range                     | Default Value |
| 1                 | Lower 32 Bits  | ro     | no          | 0...ffffff <sub>h</sub>         | 0             |
| 2                 | Higher 32 Bits | ro     | no          | 0...ffffff <sub>h</sub>         | 0             |
| 3                 | 64 Bit Value   | ro     | no          | 0...ffffffffffffff <sub>h</sub> | 0             |

Table 128: Entry Description (210B<sub>h</sub>)

#### 4.2.38 Object 2700<sub>h</sub>: TMCL Direct Communication

After writing the make signature 656b616d<sub>h</sub> to this object the drive switches to TMCL mode. The drive can then only be controlled via TMCL commands written to the OS command object 1023/01<sub>h</sub>. The drive can only be reset to normal CANopen functionality using the DS-301 reset application command.

| Object Description |                           |             |            |
|--------------------|---------------------------|-------------|------------|
| Index              | Name                      | Object Type | Data Type  |
| 2700 <sub>h</sub>  | TMCL Direct Communication | Variable    | UNSIGNED32 |

Table 129: Object Description (2700<sub>h</sub>)

| Entry Description |        |             |                       |               |
|-------------------|--------|-------------|-----------------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range           | Default Value |
| 0                 | rw     | no          | 656b616d <sub>h</sub> | 0             |

Table 130: Entry Description (2700<sub>h</sub>)

#### 4.2.39 Object 2701<sub>h</sub>: Manufacturer Specific Mode

Writing the make signature to this object turns on the manufacturer specific mode. The manufacturer specific mode can be turned off again by writing the kill signature to this object. The manufacturer specific mode has the following features:

- PDOs do not need to be disabled and re-enabled when the PDO mapping is to be changed.
- The RTR bit in the COB-ID of PDO definitions is ignored.

|        |                       |   |                                        |
|--------|-----------------------|---|----------------------------------------|
| read:  | 0                     | = | manufacturer specific mode is inactive |
|        | 1                     | = | manufacturer specific mode is active   |
| write: | 656b616d <sub>h</sub> | = | make signature                         |
|        | 6c6c696b <sub>h</sub> | = | kill signature                         |

| Object Description |                            |             |            |
|--------------------|----------------------------|-------------|------------|
| Index              | Name                       | Object Type | Data Type  |
| 2701 <sub>h</sub>  | Manufacturer Specific Mode | Variable    | UNSIGNED32 |

Table 131: Object Description (2701<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | see above   | 0             |

Table 132: Entry Description (2701<sub>h</sub>)



#### 4.2.40 Object 2702<sub>h</sub>: Device Digital Inputs

Bits 23...16 of this object reflect the states of the general purpose inputs of the module. The number of available inputs depends on the module type.

| Bit Definitions |             |
|-----------------|-------------|
| Bit             | Description |
| 16              | IN0         |
| 17              | IN1         |

Table 133: Bit Definitions (2702<sub>h</sub>)

| Object Description |                       |             |            |
|--------------------|-----------------------|-------------|------------|
| Index              | Name                  | Object Type | Data Type  |
| 2702 <sub>h</sub>  | Device Digital Inputs | Variable    | UNSIGNED32 |

Table 134: Object Description (2702<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | yes         | –           | 0             |

Table 135: Entry Description (2702<sub>h</sub>)

#### 4.2.41 Object 2703<sub>h</sub>: Device Digital Outputs

With this object the digital outputs (general purpose outputs) can be set. Bits 23...16 of sub index 1 switch the outputs of the module. Bits 23...16 of sub index 2 determine which outputs can be switched. The number of available digital digital outputs depends on the module type.

| Bit Definitions |             |
|-----------------|-------------|
| Bit             | Description |
| 16              | OUT0        |
| 17              | OUT1        |

Table 136: Bit Definitions (2703<sub>h</sub>)

| Object Description |                        |             |           |
|--------------------|------------------------|-------------|-----------|
| Index              | Name                   | Object Type | Data Type |
| 2703 <sub>h</sub>  | Device Digital Outputs | Variable    | ARRAY     |

Table 137: Object Description (2703<sub>h</sub>)



| Entry Description |                  |        |             |             |               |
|-------------------|------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description      | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Physical outputs | rw     | yes         | UNSIGNED32  | 0             |
| 2                 | Output mask      | rw     | yes         | UNSIGNED32  | 0             |

Table 138: Entry Description (2703<sub>h</sub>)**Note**

Output #0 can also be used for automatically controlling a brake that can be connected to the module via this output. In order to be able to control output #0 via this object the automatic brake control function has to be disabled. Do this by writing 0 to sub-index 1 and sub-index 2 of object 200C<sub>h</sub>.

**4.2.42 Object 2704<sub>h</sub>: CAN Bit Rate**

With this object it is possible to change the CAN bit rate. To do this, first write the new value to this object. Then, store the new setting by writing the save signature to object 2706<sub>h</sub>. After that, reset the module. The new setting then becomes active.

| Object Description |              |             |            |
|--------------------|--------------|-------------|------------|
| Index              | Name         | Object Type | Data Type  |
| 2704 <sub>h</sub>  | CAN Bit Rate | Variable    | UNSIGNED16 |

Table 139: Object Description (2704<sub>h</sub>)

| Entry Description |        |             |                                |               |
|-------------------|--------|-------------|--------------------------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range                    | Default Value |
| 0                 | rw     | no          | 20,50,100,125,250,500,800,1000 | 1000          |

Table 140: Entry Description (2704)<sub>h</sub>

How to change the bit rate of a module:

- Write new bit rate in object 2704<sub>h</sub>.
- Write the save signature 65766173<sub>h</sub> to sub-index 1 of object 2706<sub>h</sub>.
- Reset module.

**4.2.43 Object 2705<sub>h</sub>: Node ID**

On modules that do not have address switches the node ID can be selected using this object. On modules with address switches the node ID is normally selected using the address switches. Only when the address switches are set to an invalid value (0 or >127) this object overrides the address switch setting. To change the node ID, first write the new node ID to this object. Then, store the new setting by writing the save signature to object 2706<sub>h</sub>. After that, reset the module. The new setting then becomes active.



| Object Description |         |             |           |
|--------------------|---------|-------------|-----------|
| Index              | Name    | Object Type | Data Type |
| 2705 <sub>h</sub>  | Node ID | Variable    | UNSIGNED8 |

Table 141: Object Description (2705<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 1...127     | 1             |

Table 142: Entry Description (2705)<sub>h</sub>

How to change the node ID of a module:

- Write new node ID to object 2705<sub>h</sub>.
- Write save signature 65766173<sub>h</sub> to sub-index 1 of object 2706<sub>h</sub>.
- Reset the module.

#### 4.2.44 Object 2706<sub>h</sub>: Store

Writing the save signature to this object permanently saves changes made to objects 2704<sub>h</sub> and 2705<sub>h</sub>. The save signature is 65766173<sub>h</sub>.

| Object Description |       |             |            |
|--------------------|-------|-------------|------------|
| Index              | Name  | Object Type | Data Type  |
| 2706 <sub>h</sub>  | Store | Variable    | UNSIGNED32 |

Table 143: Object Description (2706<sub>h</sub>)

| Entry Description |        |             |                                       |               |
|-------------------|--------|-------------|---------------------------------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range                           | Default Value |
| 0                 | rw     | no          | save signature: 65766173 <sub>h</sub> | 1             |

Table 144: Entry Description (2706)<sub>h</sub>

#### 4.2.45 Object 2707<sub>h</sub>: CAN Bit Rate Load

This object shows the selected CAN bit rate.



| Object Description |                   |             |           |
|--------------------|-------------------|-------------|-----------|
| Index              | Name              | Object Type | Data Type |
| 2707 <sub>h</sub>  | CAN Bit Rate Load | Variable    | UNSIGNED8 |

Table 145: Object Description (2707<sub>h</sub>)

| Entry Description |        |             |             |                     |
|-------------------|--------|-------------|-------------|---------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value       |
| 0                 | ro     | no          | 20...1000   | depends on bit rate |

Table 146: Entry Description (2707)<sub>h</sub>

#### 4.2.46 Object 2708<sub>h</sub>: Node ID Load

This object shows the selected node ID.

| Object Description |              |             |           |
|--------------------|--------------|-------------|-----------|
| Index              | Name         | Object Type | Data Type |
| 2708 <sub>h</sub>  | Node ID Load | Variable    | UNSIGNED8 |

Table 147: Object Description (2708<sub>h</sub>)

| Entry Description |        |             |             |                            |
|-------------------|--------|-------------|-------------|----------------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value              |
| 0                 | ro     | no          | 1..127      | Depends on node ID setting |

Table 148: Entry Description (2708<sub>h</sub>)

#### 4.2.47 Object 270E<sub>h</sub>: Device Analog Inputs

This object shows the values of the analog inputs of the device.

| Object Description |                      |             |            |
|--------------------|----------------------|-------------|------------|
| Index              | Name                 | Object Type | Data Type  |
| 270E <sub>h</sub>  | Device Analog Inputs | Array       | UNSIGNED32 |

Table 149: Object Description (270E<sub>h</sub>)

| Entry Description |                |        |             |             |               |
|-------------------|----------------|--------|-------------|-------------|---------------|
| Sub-index         | Description    | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Analog input 0 | ro     | yes         | 0...1023    | –             |
| 2                 | Analog input 1 | ro     | yes         | 0...1023    | –             |

Table 150: Entry Description (270E<sub>h</sub>)

#### 4.2.48 Object 2710<sub>h</sub>: Pull-up Resistors

This object enables or disables the built-in pull-up resistors for the stop and home switch inputs. Bit 0 is used to switch the pull-up resistor for the HOME input, bit 1 is used to switch the pull-up resistor for the STOP\_L input and bit 2 controls the pull-up resistor for the STOP\_R input.

| Value Definition |                                                                                    |
|------------------|------------------------------------------------------------------------------------|
| Value            | Description                                                                        |
| 0                | All pull-up resistors off.                                                         |
| 1                | Pull-up resistor on for HOME only.<br>Pull-up resistors off for STOP_L and STOP_R. |
| 2                | Pull-up resistor on for STOP_L only.<br>Pull-up resistors off for STOP_R and HOME. |
| 3                | Pull-up resistors on for HOME and STOP_L.<br>Pull-up resistor off for STOP_R.      |
| 4                | Pull-up resistor on for STOP_R only.<br>Pull-up resistors off for STOP_L and HOME. |
| 5                | Pull-up resistors on for HOME and STOP_R.<br>Pull-up resistor off for STOP_L.      |
| 6                | Pull-up resistors on for STOP_L and STOP_R.<br>Pull-up resistor off for HOME.      |
| 7                | All pull-up resistors on.                                                          |

Table 151: Value Description (2710<sub>h</sub>)

| Object Description |                   |             |           |
|--------------------|-------------------|-------------|-----------|
| Index              | Name              | Object Type | Data Type |
| 2710 <sub>h</sub>  | Pull-up resistors | Variable    | UNSIGNED8 |

Table 152: Object Description (2710<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0...7       | 0             |

*Table 153: Entry Description (2710<sub>h</sub>)*

## 5 Profile specific Area

The profile segment contains CiA-402 standard motion control objects. These objects control the motion control functions of the PD-1180. Since it is not possible to operate the modes in parallel, the user is able to activate the required function by selecting a mode of operation. The control device writes to the modes of operation object in order to select the operation mode. The drive device provides the modes of operation display object to indicate the actual activated operation mode. Controlword, statusword, and set-points are used mode-specific. This implies the responsibility of the control device to avoid inconsistencies and erroneous behavior.

The following operating modes (selectable via object 6060<sub>h</sub>, please see 5.1.6) are implemented on the PD-1180:

- Profile position mode (pp)
- Velocity mode (vl)
- Profile velocity mode (pv)
- Homing mode (hm)

### 5.1 Detailed Object Specifications

#### 5.1.1 Object 605A<sub>h</sub>: Quick Stop Option Code

This object indicates what action is performed when the quick stop function is executed. The slow down ramp is the deceleration value of the used mode of operation. The following quick stop option codes are supported in the current version of the CANopen firmware:

| Value Definition |                                                                                |
|------------------|--------------------------------------------------------------------------------|
| Value            | Definition                                                                     |
| 1                | Slow down on <i>slow down ramp</i> and transit into <i>switch on disabled</i>  |
| 2                | Slow down on <i>quick stop ramp</i> and transit into <i>switch on disabled</i> |
| 5                | Slow down on <i>slow down ramp</i> and stay in <i>quick stop active</i>        |
| 6                | Slow down on <i>quick stop ramp</i> and stay in <i>quick stop active</i>       |

Table 154: Value Description (605A<sub>h</sub>)

| Object Description |                        |             |           |
|--------------------|------------------------|-------------|-----------|
| Index              | Name                   | Object Type | Data Type |
| 605A <sub>h</sub>  | Quick stop option code | Variable    | SIGNED16  |

Table 155: Object Description (605A<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 1/2/5/6     | 2             |

Table 156: Entry Description (605A<sub>h</sub>)



### 5.1.2 Object 605B<sub>h</sub>: Shutdown Option Code

This object indicates what action is performed if there is a transition from *operation enabled* state to *ready to switch on state*. The shutdown option code always has the value 0 as only this is supported.

| Value Definition |                                                     |
|------------------|-----------------------------------------------------|
| Value            | Definition                                          |
| 0                | Disable drive function (switch off the power stage) |

Table 157: Value Description (605B<sub>h</sub>)

| Object Description |                      |             |            |
|--------------------|----------------------|-------------|------------|
| Index              | Name                 | Object Type | Data Type  |
| 605B <sub>h</sub>  | Shutdown option code | Variable    | UNSIGNED16 |

Table 158: Object Description (605B<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0           | 0             |

Table 159: Entry Description (605B<sub>h</sub>)

### 5.1.3 Object 605C<sub>h</sub>: Disable Operation Option Code

This object indicates what action is performed if there is a transition from *operation enabled* state to *switched on* state. The disable operation option code always has the value 1 as only this is supported. The slow down ramp is the deceleration value of the used mode of operation.

| Value Definition |                             |
|------------------|-----------------------------|
| Value            | Definition                  |
| 1                | Slow down on slow down ramp |

Table 160: Value Description (605C<sub>h</sub>)

| Object Description |                               |             |            |
|--------------------|-------------------------------|-------------|------------|
| Index              | Name                          | Object Type | Data Type  |
| 605C <sub>h</sub>  | Disable operation option code | Variable    | UNSIGNED16 |

Table 161: Object Description (605C<sub>h</sub>)



| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 1           | 1             |

Table 162: Entry Description (605C<sub>h</sub>)

#### 5.1.4 Object 605D<sub>h</sub>: Halt Option Code

This object indicates what action is performed when the halt function is executed. The slow down ramp is the deceleration value of the used mode of operation. The halt option code always has the value 1 as only this is supported.

| Value Definition |                                                                  |
|------------------|------------------------------------------------------------------|
| Value            | Definition                                                       |
| 1                | Slow down on slow down ramp and stay in <i>operation enabled</i> |

Table 163: Value Description (605D<sub>h</sub>)

| Object Description |                  |             |            |
|--------------------|------------------|-------------|------------|
| Index              | Name             | Object Type | Data Type  |
| 605D <sub>h</sub>  | Halt option code | Variable    | UNSIGNED16 |

Table 164: Object Description (605D<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 1           | 1             |

Table 165: Entry Description (605D<sub>h</sub>)

#### 5.1.5 Object 605E<sub>h</sub>: Fault Reaction Option Code

This object indicates what action is performed when fault is detected in the power drive system. The slow down ramp is the deceleration value of the used mode of operation. The fault reaction option code always has the value 2 as only this is supported.

| Value Definition |                              |
|------------------|------------------------------|
| Value            | Definition                   |
| 2                | Slow down on quick stop ramp |

Table 166: Value Description (605E<sub>h</sub>)

| Object Description |                            |             |            |
|--------------------|----------------------------|-------------|------------|
| Index              | Name                       | Object Type | Data Type  |
| 605E <sub>h</sub>  | Fault reaction option code | Variable    | UNSIGNED16 |

Table 167: Object Description (605E<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 2           | 2             |

Table 168: Entry Description (605E<sub>h</sub>)

### 5.1.6 Object 6060<sub>h</sub>: Modes of Operation

This object indicates the requested operation mode. Supported operating modes are:

| Value Definition |                            |
|------------------|----------------------------|
| Value            | Mode                       |
| 0                | No mode                    |
| 1                | Profile position mode (pp) |
| 2                | Velocity mode (vl)         |
| 3                | Profile velocity mode (pv) |
| 6                | Homing mode (hm)           |

Table 169: Value Description (6060<sub>h</sub>)

The motor will not run when the operating mode is set to 0. It will be stopped when the motor is running in one of the supported operating modes and the operating mode is then switched to 0.

| Object Description |                    |             |           |
|--------------------|--------------------|-------------|-----------|
| Index              | Name               | Object Type | Data Type |
| 6060 <sub>h</sub>  | Modes of operation | Variable    | SIGNED8   |

Table 170: Object Description (6060<sub>h</sub>)

| Entry Description |        |                  |               |               |
|-------------------|--------|------------------|---------------|---------------|
| Sub-index         | Access | PDO Mapping      | Value Range   | Default Value |
| 0                 | rw     | refer to CiA-402 | see table 169 | 0             |

Table 171: Entry Description (6060<sub>h</sub>)

**Note**

It is not allowed to write the same mode number twice to object 6060<sub>h</sub>. So before writing a new value to object 6060<sub>h</sub>, either check object 6061<sub>h</sub> or object 6060<sub>h</sub> to see if the operating mode has not already been set to that value.

**5.1.7 Object 6061<sub>h</sub>: Modes of Operation Display**

This object shows the operating mode that is currently set.

| Value Definition |                            |
|------------------|----------------------------|
| Value            | Mode                       |
| 0                | No mode                    |
| 1                | Profile position mode (pp) |
| 2                | Velocity mode (vl)         |
| 3                | Profile velocity mode (pv) |
| 6                | Homing mode (hm)           |

Table 172: Value Description (6061<sub>h</sub>)

The motor will not run when the operating mode is set to 0. It will be stopped when the motor is running in one of the supported operating modes and the operating mode is then switched to 0.

| Object Description |                            |             |           |
|--------------------|----------------------------|-------------|-----------|
| Index              | Name                       | Object Type | Data Type |
| 6061 <sub>h</sub>  | Modes of operation display | Variable    | SIGNED8   |

Table 173: Object Description (6061<sub>h</sub>)

| Entry Description |        |                  |               |               |
|-------------------|--------|------------------|---------------|---------------|
| Sub-index         | Access | PDO Mapping      | Value Range   | Default Value |
| 0                 | rw     | refer to CiA-402 | see table 172 | 0             |

Table 174: Entry Description (6061<sub>h</sub>)

**5.1.8 Object 606A<sub>h</sub>: Sensor Selection Code**

This object provides the source of the position sensor actual value. It selects if the built-in magnetic encoder is to be used for position monitoring.



| Value Definition |              |
|------------------|--------------|
| Value            | Mode         |
| 0                | Encoder used |
| -1               | No encoder   |

Table 175: Value Description (606A<sub>h</sub>)

| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 606A <sub>h</sub>  | Sensor selection code | Variable    | SIGNED16  |

Table 176: Object Description (606A<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | 0/-1        | -1            |

Table 177: Entry Description (606A<sub>h</sub>)

### 5.1.9 Object 60FD<sub>h</sub>: Digital Inputs

This object contains the states of the digital inputs of the module. Starting from bit 0, every bit reflects the state of one digital input. The number of valid bits depends on the number of digital inputs on the module used.

| Object Description |                |             |            |
|--------------------|----------------|-------------|------------|
| Index              | Name           | Object Type | Data Type  |
| 60FD <sub>h</sub>  | Digital inputs | Variable    | UNSIGNED32 |

Table 178: Object Description (60FD<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | mappable    | UNSIGNED32  | 0             |

Table 179: Entry Description (60FD<sub>h</sub>)

### 5.1.10 Object 6502<sub>h</sub>: Supported Drive Modes

This object provides information on the supported drive modes. A bit that is set means that the mode is supported, a bit that is not set means that the mode is not supported by the drive.



| Value Definition |                                        |
|------------------|----------------------------------------|
| Bit              | Mode                                   |
| 0                | Profile position mode (pp)             |
| 1                | Velocity mode (vl)                     |
| 2                | Profile velocity mode (pv)             |
| 3                | Torque mode (tq)                       |
| 4                | Reserved                               |
| 5                | Homing mode (hm)                       |
| 6                | Interpolated position mode (ip)        |
| 7                | Cyclic synchronous position mode (csp) |
| 8                | Cyclic synchronous velocity mode (csv) |
| 9                | Cyclic synchronous torque mode (cst)   |

Table 180: Value Definition (6502<sub>h</sub>)

| Object Description |                       |             |            |
|--------------------|-----------------------|-------------|------------|
| Index              | Name                  | Object Type | Data Type  |
| 6502 <sub>h</sub>  | Supported drive modes | Variable    | UNSIGNED32 |

Table 181: Object Description (6502<sub>h</sub>)

| Entry Description |        |             |             |                             |
|-------------------|--------|-------------|-------------|-----------------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value               |
| 0                 | ro     | no          | UNSIGNED32  | Depends on supported modes. |

Table 182: Entry Description (6502<sub>h</sub>)



### 6.1.1 Object 6040<sub>n</sub>: Control Word

This object indicates the received command controlling the power drive system finite state automaton (PDS FSA). The CiA-402 state machine can be controlled using this object. Please refer to figure 8 for detailed information.

| Structure of the Control Word |    |     |   |    |     |     |    |    |    |     |
|-------------------------------|----|-----|---|----|-----|-----|----|----|----|-----|
| 15                            | 11 | 10  | 9 | 8  | 7   | 6   | 4  | 3  | 2  | 1 0 |
| nu                            | r  | oms | h | fr | oms | eo  | qs | ev | so |     |
| MSB                           |    |     |   |    |     | LSB |    |    |    |     |

Legend: nu=not used; r=reserved; oms=operation mode specific; h=halt; fr=fault reset; eo=enable operation; qs=quick stop; ev=enable voltage; so=switch on.

Table 183: Structure of the Control Word in pp Mode

| Operation Mode specific Bits in pp Mode |                     |                                                              |
|-----------------------------------------|---------------------|--------------------------------------------------------------|
| Bit                                     | Name                | Definition                                                   |
| 4                                       | New set point       | 0-to-1: the next positioning will be started.                |
| 5                                       | Change immediately  | Not supported.                                               |
| 6                                       | Absolute / relative | 0: New position is absolute.<br>1: New position is relative. |
| 9                                       | Change set point    | Not supported.                                               |

Table 184: Operation Mode specific Bits in pp Mode

| Command Coding               |                      |       |       |       |       |             |
|------------------------------|----------------------|-------|-------|-------|-------|-------------|
| Command                      | Bits of Control Word |       |       |       |       | Transitions |
|                              | Bit 7                | Bit 3 | Bit 2 | Bit 1 | Bit 0 |             |
| Shutdown                     | 0                    | x     | 1     | 1     | 0     | 2,6,8       |
| Switch on                    | 0                    | 0     | 1     | 1     | 1     | 3           |
| Switch on & enable operation | 0                    | 1     | 1     | 1     | 1     | 3, 4        |
| Disable voltage              | 0                    | x     | x     | 0     | x     | 7,9,10,12   |
| Quick stop                   | 0                    | x     | 0     | 1     | x     | 7,10,11     |
| Disable operation            | 0                    | 0     | 1     | 1     | 1     | 5           |
| Enable operation             | 0                    | 1     | 1     | 1     | 1     | 4, 16       |
| Fault reset                  | 0-to-1               | x     | x     | x     | x     | 15          |

Table 185: Command Coding



| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6040 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 186: Object Description (6040<sub>h</sub> in pp Mode)

| Entry Description |        |              |                           |               |
|-------------------|--------|--------------|---------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range               | Default Value |
| 0                 | rw     | see CiA402-3 | See command coding above. |               |

Table 187: Entry Description (6040<sub>h</sub> in pp Mode)

### 6.1.2 Object 6041<sub>h</sub>: Status Word

This object provides the status of the PDS FSA. It reflects the status of the CiA-402 state machine. Please refer to figure 8 for detailed information. The object is structured as defined below.

For more information about the coding please refer to the CANopen Drives and motion control device profile, part 2.

| Structure of the Status Word |     |     |     |    |    |    |   |     |    |    |   |    |    |      |   |
|------------------------------|-----|-----|-----|----|----|----|---|-----|----|----|---|----|----|------|---|
| 15                           | 14  | 13  | 12  | 11 | 10 | 9  | 8 | 7   | 6  | 5  | 4 | 3  | 2  | 1    | 0 |
| dir                          | mot | oms | ila | tr | rm | ms | w | sod | qs | ve | f | oe | so | rtso |   |
| MSB                          |     |     |     |    |    |    |   |     |    |    |   |    |    | LSB  |   |

Legend: nu=not used; r=reserved; oms=operation mode specific; h=halt; fr=fault reset; oe=operation enable; qs=quick stop; ve=voltage enable; so=switch on.

Table 188: Structure of the Status Word in pp Mode

| Trinamic Specific Bits |                       |                                             |
|------------------------|-----------------------|---------------------------------------------|
| Bit                    | Name                  | Definition                                  |
| 14                     | Motor activity        | 0: Motor stands still.<br>1: Motor rotates. |
| 15                     | Direction of rotation | This bit shows the direction of rotation.   |

Table 189: Trinamic Specific Bits



| Operation Mode specific Bits in pp Mode |                        |                                                           |
|-----------------------------------------|------------------------|-----------------------------------------------------------|
| Bit                                     | Name                   | Definition                                                |
| 10                                      | Target reached         | Set when the motor is within the position window.         |
| 12                                      | Set point acknowledged | 0: Set point processed.<br>1: Set point still in process. |
| 13                                      | Following error        | Not supported.                                            |

Table 190: Operation Mode specific Bits in pp Mode

| State Coding                     |                        |
|----------------------------------|------------------------|
| Status word                      | FSA state              |
| xxxx xxxx x0xx 0000 <sub>h</sub> | Not ready to switch on |
| xxxx xxxx x1xx 0000 <sub>h</sub> | Switch on disabled     |
| xxxx xxxx x01x 0001 <sub>h</sub> | Ready to switch on     |
| xxxx xxxx x01x 0011 <sub>h</sub> | Switched on            |
| xxxx xxxx x01x 0111 <sub>h</sub> | Operation enabled      |
| xxxx xxxx x00x 0111 <sub>h</sub> | Quick stop active      |
| xxxx xxxx x0xx 1111 <sub>h</sub> | Fault reaction active  |
| xxxx xxxx x0xx 1000 <sub>h</sub> | Fault                  |

Table 191: State Coding

| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6041 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 192: Object Description (6041<sub>h</sub> in pp Mode)

| Entry Description |        |              |                         |               |
|-------------------|--------|--------------|-------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range             | Default Value |
| 0                 | rw     | see CiA402-3 | See state coding above. |               |

Table 193: Entry Description (6041<sub>h</sub> in pp Mode)

### 6.1.3 Object 6062<sub>h</sub>: Position Demand Value

This object provides the demanded position value. The value is given in microsteps. Object 6062<sub>h</sub> indicates the actual position that the motor should have. It is not to be confused with objects 6063<sub>h</sub> and 6064<sub>h</sub>.



| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 6062 <sub>h</sub>  | Position Demand Value | Variable    | SIGNED32  |

Table 194: Object Description (6062<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 195: Entry Description (6062<sub>h</sub>)

#### 6.1.4 Object 6063<sub>h</sub>: Position Actual Internal Value

This object provides the demanded position value. The value is given in microsteps. It is the same as object 6062<sub>h</sub>.

| Object Description |                                |             |           |
|--------------------|--------------------------------|-------------|-----------|
| Index              | Name                           | Object Type | Data Type |
| 6063 <sub>h</sub>  | Position Actual Internal Value | Variable    | SIGNED32  |

Table 196: Object Description (6063<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 197: Entry Description (6063<sub>h</sub>)

#### 6.1.5 Object 6064<sub>h</sub>: Position Actual Value

This object provides the actual value of the position measurement device. It always contains the same value as object 6063<sub>h</sub>.

| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 6064 <sub>h</sub>  | Position Actual Value | Variable    | SIGNED32  |

Table 198: Object Description (6064<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 199: Entry Description (6064<sub>h</sub>)

### 6.1.6 Object 6065<sub>h</sub>: Following Error Window

This object indicates the configured range of tolerated position values symmetrically to the position demand value. If the position actual value is out of the following error window, a following error occurs. A following error may occur when a drive is blocked, unreachable profile velocity occurs, or at wrong closed-loop coefficients. The value shall be given in microsteps.

When the difference between motor position (object 6062<sub>h</sub>) and encoder position (object 6063<sub>h</sub> or 6064<sub>h</sub>) is greater than the value set here, the motor will be stopped and an emergency message will be sent. Setting this object to zero will turn off this feature completely.

---

**Note** Setting this object to a too low value will lead to false alarms.

---

| Object Description |                        |             |            |
|--------------------|------------------------|-------------|------------|
| Index              | Name                   | Object Type | Data Type  |
| 6065 <sub>h</sub>  | Following Error Window | Variable    | UNSIGNED32 |

Table 200: Object Description (6065<sub>h</sub>)

| Entry Description |        |             |                |               |
|-------------------|--------|-------------|----------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range    | Default Value |
| 0                 | rw     | no          | 0...2147483647 | 0             |

Table 201: Entry Description (6065<sub>h</sub>)

### 6.1.7 Object 6067<sub>h</sub>: Position Window

This object indicates the configured symmetrical range of accepted positions relative to the target position. If the actual value of the position encoder is within the position window, this target position is regarded as having been reached. The value is given in increments. If the value of the position window is FFFFFFFF<sub>h</sub>, the position window control is switched off. If this object is set to zero, the target reached event will be signaled when the demand position (6062<sub>h</sub>) has reached the target position (6064<sub>h</sub>). When the position window is set to a value greater than zero, the target reached event will be signaled when the actual encoder position value (6064<sub>h</sub>) is within  $(target\_position - position\_window)$  and  $(target\_position + position\_window)$ .



| Object Description |                 |             |            |
|--------------------|-----------------|-------------|------------|
| Index              | Name            | Object Type | Data Type  |
| 6067 <sub>h</sub>  | Position Window | Variable    | UNSIGNED32 |

Table 202: Object Description (6067<sub>h</sub>)

| Entry Description |        |             |             |                      |
|-------------------|--------|-------------|-------------|----------------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value        |
| 0                 | rw     | no          | UNSIGNED32  | FFFFFFF <sub>h</sub> |

Table 203: Entry Description (6067<sub>h</sub>)

### 6.1.8 Object 6068<sub>h</sub>: Position Window Time

This object indicates the configured time, during which the actual position within the position window is measured. The value is given in ms. If this object is set to a value greater than zero and also the position window (6067<sub>h</sub>) is set to a value greater than zero the target reached event will not be signaled until the actual position (6064<sub>h</sub>) is at least as many milliseconds within the position window as defined by this object.

| Object Description |                      |             |            |
|--------------------|----------------------|-------------|------------|
| Index              | Name                 | Object Type | Data Type  |
| 6068 <sub>h</sub>  | Position Window Time | Variable    | UNSIGNED16 |

Table 204: Object Description (6068<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED16  | 0             |

Table 205: Entry Description (6068<sub>h</sub>)

### 6.1.9 Object 606C<sub>h</sub>: Velocity Actual Value

This object shows the actual velocity value of the motor. The value is given in internal or user-defined velocity units (depending on object 208C<sub>h</sub>, described in section 4.2.15).

| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 606C <sub>h</sub>  | Velocity Actual Value | Variable    | SIGNED32  |

Table 206: Object Description (606C<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 207: Entry Description (606C<sub>h</sub>)

### 6.1.10 Object 607A<sub>h</sub>: Target Position

The target position is the position that the drive should move to in profile position mode using the current settings of motion control parameters (such as velocity, acceleration, deceleration, motion profile type etc.). The value of this object is interpreted as absolute or relative depending on the abs/rel flag in the controlword. It is given in microsteps.

| Object Description |                 |             |           |
|--------------------|-----------------|-------------|-----------|
| Index              | Name            | Object Type | Data Type |
| 607A <sub>h</sub>  | Target Position | Variable    | SIGNED32  |

Table 208: Object Description (607A<sub>h</sub> in pp Mode)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | rw     | Refer to CiA402-3 | SIGNED32    | 0             |

Table 209: Entry Description (607A<sub>h</sub> in pp Mode)

### 6.1.11 Object 607D<sub>h</sub>: Software Position Limit

This object indicates the configured maximal and minimal software position limits. These parameters define the absolute position limits for the position demand value and the position actual value. Every new target position is checked against these limits. The limit positions are always relative to the machine home position. Before being compared with the target position, they are corrected internally by the home offset as follows:

$$\text{Corrected\_min\_position\_limit} = \text{min\_position\_limit} - \text{home\_offset}$$

$$\text{Corrected\_max\_position\_limit} = \text{max\_position\_limit} - \text{home\_offset}$$

| Object Description |                         |             |           |
|--------------------|-------------------------|-------------|-----------|
| Index              | Name                    | Object Type | Data Type |
| 607D <sub>h</sub>  | Software Position Limit | Array       | SIGNED32  |

Table 210: Object Description (607D<sub>h</sub>)

| Entry Description |                        |        |             |             |               |
|-------------------|------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description            | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Minimum Position Limit | rw     | no          | SIGNED32    | -2147483648   |
| 2                 | Maximum Position Limit | rw     | no          | SIGNED32    | 2147483647    |

Table 211: Entry Description (607D<sub>h</sub>)

### 6.1.12 Object 6081<sub>h</sub>: Profile Velocity

This object indicates the configured velocity normally attained at the end of the acceleration ramp during a profiled motion and is valid for both directions of motion. The profile velocity is the maximum velocity used when driving to a new position. It is given in internal or user specific units (depending on object 208C<sub>h</sub>, section 4.2.15).

| Object Description |                  |             |           |
|--------------------|------------------|-------------|-----------|
| Index              | Name             | Object Type | Data Type |
| 6081 <sub>h</sub>  | Profile Velocity | Variable    | SIGNED32  |

Table 212: Object Description (6081<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | SIGNED32    | 0             |

Table 213: Entry Description (6081<sub>h</sub>)

### 6.1.13 Object 6083<sub>h</sub>: Profile Acceleration

This object indicates the configured acceleration. Object 6083<sub>h</sub> sets the maximum acceleration to be used in profile position and profile velocity mode.

The units for object 6083<sub>h</sub> can be chosen with object 208E<sub>h</sub>, described in section 4.2.16.

| Object Description |                      |             |           |
|--------------------|----------------------|-------------|-----------|
| Index              | Name                 | Object Type | Data Type |
| 6083 <sub>h</sub>  | Profile Acceleration | Variable    | SIGNED32  |

Table 214: Object Description (6083<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | SIGNED32    | 0             |

Table 215: Entry Description (6083<sub>h</sub>)

### 6.1.14 Object 6084<sub>h</sub>: Profile Deceleration

This object indicates the configured deceleration. On the PD-1180 module the deceleration ramp is always the same as the acceleration ramp. For this reason this object is a read-only object and always reads the same value as object 6083<sub>h</sub>.

| Object Description |                      |             |           |
|--------------------|----------------------|-------------|-----------|
| Index              | Name                 | Object Type | Data Type |
| 6084 <sub>h</sub>  | Profile Deceleration | Variable    | SIGNED32  |

Table 216: Object Description (6084<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | ro     | no          | SIGNED32    | 0             |

Table 217: Entry Description (6084<sub>h</sub>)

### 6.1.15 Object 6085<sub>h</sub>: Quick Stop Deceleration

This object indicates the configured deceleration used to stop the motor when the quick stop function is activated and the quick stop code object 605A<sub>h</sub> is set to 2 (or 6). The value is given in the same unit as profile acceleration object 6083<sub>h</sub>.

| Object Description |                         |             |            |
|--------------------|-------------------------|-------------|------------|
| Index              | Name                    | Object Type | Data Type  |
| 6085 <sub>h</sub>  | Quick stop deceleration | Variable    | UNSIGNED32 |

Table 218: Object Description (6085<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED32  | 51200         |

Table 219: Entry Description (6085<sub>h</sub>)

## 6.2 How to move a Motor in pp Mode

Here is a little example that shows how to get a motor running in pp mode. In this little example we assume that the module has been reset (and then switched to pre-operational or operational) by NMT commands before. Please note that the values are decimal.

- If you do not have any limit switches connected, first disable the limit switch inputs by writing 3 to object 2005<sub>h</sub>.



- Select pp mode by writing 1 to object 6060<sub>h</sub>.
- Write 6 to object 6040<sub>h</sub> to switch to READY\_TO\_SWITCH\_ON state.
- Write 7 to object 6040<sub>h</sub> to switch to SWITCHED\_ON state.
- Write 15 to object 6040<sub>h</sub> to switch to OPERATION\_ENABLED state.
- Write the desired target position (e.g. 500000) to object 607A<sub>h</sub>.
- Mark the new target position as active by writing 31 to object 6040<sub>h</sub>. The motor starts moving now.
- Reset the activation by writing 15 to object 6040<sub>h</sub> (this can be done while the motor is still moving).



## 7 Velocity Mode

The velocity mode is used to control the velocity of the drive without a special regard of the position. It contains limit functions.

The input parameters in velocity mode include:

- Velocity
- Acceleration
- Deceleration
- Quick stop deceleration

### Note

Compared to the profile velocity (pv) mode, the vl mode offers only a very limited functionality. Also the ranges of velocity and acceleration are limited, especially when using user units.

Therefore we recommend using the pv mode for new applications. The vl mode is only supported for compatibility reasons.

### 7.1 Detailed Object Specifications

#### 7.1.1 Object 6040<sub>h</sub>: Control Word

This object indicates the received command controlling the power drive system finite state automaton (PDS FSA). The CiA-402 state machine can be controlled using this object. Please refer to figure 8 for detailed information.

In vl mode the control word does not contain any operation mode specific bits.

| Structure of the Control Word |    |    |   |   |    |     |   |    |    |    |    |
|-------------------------------|----|----|---|---|----|-----|---|----|----|----|----|
| 15                            | 11 | 10 | 9 | 8 | 7  | 6   | 4 | 3  | 2  | 1  | 0  |
| nu                            |    | r  | r | h | fr | r   |   | eo | qs | ev | so |
| MSB                           |    |    |   |   |    | LSB |   |    |    |    |    |

Legend: nu=not used; r=reserved; h=halt; fr=fault reset; eo=enable operation; qs=quick stop; ev=enable voltage; so=switch on.

Table 220: Structure of the Control Word in vl Mode



| Command Coding               |                      |       |       |       |       |             |
|------------------------------|----------------------|-------|-------|-------|-------|-------------|
| Command                      | Bits of Control Word |       |       |       |       | Transitions |
|                              | Bit 7                | Bit 3 | Bit 2 | Bit 1 | Bit 0 |             |
| Shutdown                     | 0                    | x     | 1     | 1     | 0     | 2,6,8       |
| Switch on                    | 0                    | 0     | 1     | 1     | 1     | 3           |
| Switch on & enable operation | 0                    | 1     | 1     | 1     | 1     | 3, 4        |
| Disable voltage              | 0                    | x     | x     | 0     | x     | 7,9,10,12   |
| Quick stop                   | 0                    | x     | 0     | 1     | x     | 7,10,11     |
| Disable operation            | 0                    | 0     | 1     | 1     | 1     | 5           |
| Enable operation             | 0                    | 1     | 1     | 1     | 1     | 4, 16       |
| Fault reset                  | 0-to-1               | x     | x     | x     | x     | 15          |

Table 221: Command Coding

| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6040 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 222: Object Description (6040<sub>h</sub> in vl Mode)

| Entry Description |        |              |                           |               |
|-------------------|--------|--------------|---------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range               | Default Value |
| 0                 | rw     | see CiA402-3 | See command coding above. |               |

Table 223: Entry Description (6040<sub>h</sub> in vl Mode)

### 7.1.2 Object 6041<sub>h</sub>: Status Word

This object provides the status of the PDS FSA. It reflects the status of the CiA-402 state machine. Please refer to figure 8 for detailed information. The object is structured as defined below. For more information about the coding please refer to the CANopen Drives and motion control device profile, part 2.

| Structure of the Status Word |     |     |    |     |    |    |    |    |   |     |    |    |   |    |     |      |
|------------------------------|-----|-----|----|-----|----|----|----|----|---|-----|----|----|---|----|-----|------|
| 15                           | 14  | 13  | 12 | 11  | 10 | 9  | 8  | 7  | 6 | 5   | 4  | 3  | 2 | 1  | 0   |      |
| dir                          | mot | oms |    | ila |    | tr | rm | ms | w | sod | qs | ve | f | oe | so  | rtso |
| MSB                          |     |     |    |     |    |    |    |    |   |     |    |    |   |    | LSB |      |

Legend: nu=not used; r=reserved; oms=operation mode specific; h=halt; fr=fault reset; oe=operation enable; qs=quick stop; ve=voltage enable; so=switch on.

Table 224: Structure of the Status Word in vl Mode



| Trinamic Specific Bits |                       |                                             |
|------------------------|-----------------------|---------------------------------------------|
| Bit                    | Name                  | Definition                                  |
| 14                     | Motor activity        | 0: Motor stands still.<br>1: Motor rotates. |
| 15                     | Direction of rotation | This bit shows the direction of rotation.   |

Table 225: Trinamic Specific Bits

| Operation Mode specific Bits in vl Mode |                     |                                                   |
|-----------------------------------------|---------------------|---------------------------------------------------|
| Bit                                     | Name                | Definition                                        |
| 10                                      | Target reached      | Indicates that the target speed has been reached. |
| 12                                      | Speed               | Not supported.                                    |
| 13                                      | Max. slippage error | Not supported.                                    |

Table 226: Operation Mode specific Bits in vl Mode

| State Coding                     |                        |
|----------------------------------|------------------------|
| Status word                      | FSA state              |
| xxxx xxxx x0xx 0000 <sub>h</sub> | Not ready to switch on |
| xxxx xxxx x1xx 0000 <sub>h</sub> | Switch on disabled     |
| xxxx xxxx x01x 0001 <sub>h</sub> | Ready to switch on     |
| xxxx xxxx x01x 0011 <sub>h</sub> | Switched on            |
| xxxx xxxx x01x 0111 <sub>h</sub> | Operation enabled      |
| xxxx xxxx x00x 0111 <sub>h</sub> | Quick stop active      |
| xxxx xxxx x0xx 1111 <sub>h</sub> | Fault reaction active  |
| xxxx xxxx x0xx 1000 <sub>h</sub> | Fault                  |

Table 227: State Coding

| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6041 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 228: Object Description (6041<sub>h</sub> in vl Mode)

| Entry Description |        |              |                        |               |
|-------------------|--------|--------------|------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range            | Default Value |
| 0                 | rw     | see CiA402-3 | See state coding above |               |

Table 229: Entry Description (6041<sub>h</sub> in vl Mode)

### 7.1.3 Object 6042<sub>h</sub>: vl Target Velocity

This object indicates the required target velocity when the velocity mode is active. Use this object to control the velocity of the motor in velocity mode. After writing to this object the motor will be accelerated or decelerated to the new velocity. The range depends on the chosen units, which can be internal or user-specific. Please refer to object 208C<sub>h</sub> for more information about the velocity units.

| Object Description |                    |             |           |
|--------------------|--------------------|-------------|-----------|
| Index              | Name               | Object Type | Data Type |
| 6042 <sub>h</sub>  | vl Target Velocity | Variable    | SIGNED16  |

Table 230: Object Description (6042<sub>h</sub>)

| Entry Description |        |             |              |               |
|-------------------|--------|-------------|--------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range  | Default Value |
| 0                 | rw     | yes         | -2047...2047 | 0             |

Table 231: Entry Description (6042<sub>h</sub>)

### 7.1.4 Object 6043<sub>h</sub>: vl Velocity Demand

The object provides the instantaneous velocity generated by the ramp function. It shows the last target velocity that has been set using object 6042<sub>h</sub>. The units used for this object depend on the setting of object 208C<sub>h</sub>.

| Object Description |                    |             |           |
|--------------------|--------------------|-------------|-----------|
| Index              | Name               | Object Type | Data Type |
| 6043 <sub>h</sub>  | vl Velocity Demand | Variable    | SIGNED16  |

Table 232: Object Description (6043<sub>h</sub>)

| Entry Description |        |             |              |               |
|-------------------|--------|-------------|--------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range  | Default Value |
| 0                 | rw     | no          | -2047...2047 | 0             |

Table 233: Entry Description (6043<sub>h</sub>)

### 7.1.5 Object 6044<sub>h</sub>: vl Velocity Actual Value

This object shows the actual velocity of the motor when the motor is in velocity mode. The value is given in the same units as vl target velocity and vl velocity demand (which depends on the setting of object 208C<sub>h</sub>).

| Object Description |                          |             |           |
|--------------------|--------------------------|-------------|-----------|
| Index              | Name                     | Object Type | Data Type |
| 6044 <sub>h</sub>  | vl Velocity Actual Value | Variable    | SIGNED16  |

Table 234: Object Description (6044<sub>h</sub>)

| Entry Description |        |             |              |               |
|-------------------|--------|-------------|--------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range  | Default Value |
| 0                 | rw     | yes         | -2047...2047 | 0             |

Table 235: Entry Description (6044<sub>h</sub>)

### 7.1.6 Object 6046<sub>h</sub>: vl Velocity Min Max Amount

This object indicates the configured minimum and maximum amount of velocity in velocity mode, according to the settings of objects 2085<sub>h</sub>, 2086<sub>h</sub>, 2087<sub>h</sub> and 2088<sub>h</sub>. The units used by this object depend on object 208C<sub>h</sub>.

| Object Description |                            |             |            |
|--------------------|----------------------------|-------------|------------|
| Index              | Name                       | Object Type | Data Type  |
| 6046 <sub>h</sub>  | vl Velocity Min Max Amount | Array       | UNSIGNED32 |

Table 236: Object Description (6046<sub>h</sub>)

| Entry Description |                             |        |             |             |               |
|-------------------|-----------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description                 | Access | PDO Mapping | Value Range | Default Value |
| 0                 | Highest sub-index supported | ro     | no          | 2           | 2             |
| 1                 | Minimum velocity amount     | ro     | no          | 0...2047    | 0             |
| 2                 | Maximum velocity amount     | ro     | no          | 0...2047    | 2047          |

Table 237: Entry Description (6046<sub>h</sub>)

### 7.1.7 Object 6048<sub>h</sub>: vl Velocity Acceleration

This object indicates the configured delta speed and delta time of the slope of the acceleration ramp. Object 6048<sub>h</sub> provides the acceleration used in velocity mode. The same value is also used for the deceleration. The value of the delta speed is given in internal units or in user units, depending on object 208E<sub>h</sub>.



| Object Description |                          |             |                              |
|--------------------|--------------------------|-------------|------------------------------|
| Index              | Name                     | Object Type | Data Type                    |
| 6048 <sub>h</sub>  | vl Velocity Acceleration | Record      | vl acceleration deceleration |

Table 238: Object Description (6048<sub>h</sub>)

| Entry Description |                             |        |             |             |               |
|-------------------|-----------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description                 | Access | PDO Mapping | Value Range | Default Value |
| 0                 | Highest sub-index supported | ro     | no          | 2           | 2             |
| 1                 | Delta speed                 | rw     | no          | UNSIGNED32  | 1000          |
| 2                 | Delta time                  | ro     | no          | UNSIGNED16  | 1             |

Table 239: Entry Description (6048<sub>h</sub>)

### 7.1.8 Object 6049<sub>h</sub>: vl Velocity Deceleration

This object indicates the configured delta speed and delta time of the slope of the deceleration ramp. As on the PD-1180 module the deceleration ramp is always the same as the acceleration ramp this object is a read-only object and always reads the same values as object 6048<sub>h</sub>.

| Object Description |                          |             |                              |
|--------------------|--------------------------|-------------|------------------------------|
| Index              | Name                     | Object Type | Data Type                    |
| 6049 <sub>h</sub>  | vl Velocity Deceleration | Record      | vl acceleration deceleration |

Table 240: Object Description (6049<sub>h</sub>)

| Entry Description |                             |        |             |             |               |
|-------------------|-----------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description                 | Access | PDO Mapping | Value Range | Default Value |
| 0                 | Highest sub-index supported | ro     | no          | 2           | 2             |
| 1                 | Delta speed                 | ro     | no          | UNSIGNED32  | 1000          |
| 2                 | Delta time                  | ro     | no          | UNSIGNED16  | 1             |

Table 241: Entry Description (6049<sub>h</sub>)

## 7.2 How to move a Motor in vl Mode

- If you do not have any limit switches connected, first disable the limit switch inputs by writing 3 to object 2005<sub>h</sub>.
- Select vl mode by writing 2 to object 6060<sub>h</sub>.
- Write 6 to object 6040<sub>h</sub> to switch to READY\_TO\_SWITCH\_ON state.
- Write 7 to object 6040<sub>h</sub> to switch to SWITCHED\_ON state.



- Write 15 to object 6040<sub>h</sub> to switch to OPERATION\_ENABLED state.
- Write the desired target speed (e.g. 500) to object 6042<sub>h</sub>. The motor now accelerates to that speed.
- Stop the motor by writing 0 to object 6042<sub>h</sub>.



## 8 Profile Velocity Mode

The profile velocity mode is used to control the velocity of the drive without a special regard of the position. It contains limit functions and trajectory generation.

The profile velocity mode covers the following sub-functions:

- Demand value input via trajectory generator.
- Monitoring of the profile velocity using a window-function.
- Monitoring of velocity actual value using a threshold.

The operation of the reference value generator and its input parameters include:

- Profile velocity
- Profile acceleration
- Profile deceleration
- Emergency stop
- Motion profile type

### 8.1 Detailed Object Specifications

#### 8.1.1 Object 6040<sub>h</sub>: Control Word

This object indicates the received command controlling the power drive system finite state automaton (PDS FSA). The CiA-402 state machine can be controlled using this object. Please refer to figure 8 for detailed information.

In pv mode the control word does not contain any operation mode specific bits.

| Structure of the Control Word |    |    |   |   |    |     |   |    |    |       |
|-------------------------------|----|----|---|---|----|-----|---|----|----|-------|
| 15                            | 11 | 10 | 9 | 8 | 7  | 6   | 4 | 3  | 2  | 1 0   |
| nu                            |    | r  | r | h | fr | r   |   | eo | qs | ev so |
| MSB                           |    |    |   |   |    | LSB |   |    |    |       |

Legend: nu=not used; r=reserved; h=halt; fr=fault reset; eo=enable operation; qs=quick stop; ev=enable voltage; so=switch on.

Table 242: Structure of the Control Word in pv Mode



| Command Coding               |                      |       |       |       |       |             |
|------------------------------|----------------------|-------|-------|-------|-------|-------------|
| Command                      | Bits of Control Word |       |       |       |       | Transitions |
|                              | Bit 7                | Bit 3 | Bit 2 | Bit 1 | Bit 0 |             |
| Shutdown                     | 0                    | x     | 1     | 1     | 0     | 2,6,8       |
| Switch on                    | 0                    | 0     | 1     | 1     | 1     | 3           |
| Switch on & enable operation | 0                    | 1     | 1     | 1     | 1     | 3, 4        |
| Disable voltage              | 0                    | x     | x     | 0     | x     | 7,9,10,12   |
| Quick stop                   | 0                    | x     | 0     | 1     | x     | 7,10,11     |
| Disable operation            | 0                    | 0     | 1     | 1     | 1     | 5           |
| Enable operation             | 0                    | 1     | 1     | 1     | 1     | 4, 16       |
| Fault reset                  | 0-to-1               | x     | x     | x     | x     | 15          |

Table 243: Command Coding

| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6040 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 244: Object Description (6040<sub>h</sub> in pv Mode)

| Entry Description |        |              |                           |               |
|-------------------|--------|--------------|---------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range               | Default Value |
| 0                 | rw     | see CiA402-3 | See command coding above. |               |

Table 245: Entry Description (6040<sub>h</sub> in pv Mode)

### 8.1.2 Object 6041<sub>h</sub>: Status Word

This object provides the status of the PDS FSA. It reflects the status of the CiA-402 state machine. Please refer to figure 8 for detailed information. The object is structured as defined below. For more information about the coding please refer to the CANopen Drives and motion control device profile, part 2.

| Structure of the Status Word |     |     |    |     |    |    |    |    |   |     |    |    |   |    |     |      |
|------------------------------|-----|-----|----|-----|----|----|----|----|---|-----|----|----|---|----|-----|------|
| 15                           | 14  | 13  | 12 | 11  | 10 | 9  | 8  | 7  | 6 | 5   | 4  | 3  | 2 | 1  | 0   |      |
| dir                          | mot | oms |    | ila |    | tr | rm | ms | w | sod | qs | ve | f | oe | so  | rtso |
| MSB                          |     |     |    |     |    |    |    |    |   |     |    |    |   |    | LSB |      |

Legend: nu=not used; r=reserved; oms=operation mode specific; h=halt; fr=fault reset; oe=operation enable; qs=quick stop; ve=voltage enable; so=switch on.

Table 246: Structure of the Status Word in pv Mode



| Trinamic Specific Bits |                       |                                             |
|------------------------|-----------------------|---------------------------------------------|
| Bit                    | Name                  | Definition                                  |
| 14                     | Motor activity        | 0: Motor stands still.<br>1: Motor rotates. |
| 15                     | Direction of rotation | This bit shows the direction of rotation.   |

Table 247: Trinamic Specific Bits

| Operation Mode specific Bits in pv Mode |                     |                                                   |
|-----------------------------------------|---------------------|---------------------------------------------------|
| Bit                                     | Name                | Definition                                        |
| 10                                      | Target reached      | Indicates that the target speed has been reached. |
| 12                                      | Speed               | Not supported.                                    |
| 13                                      | Max. slippage error | Not supported.                                    |

Table 248: Operation Mode specific Bits in pv Mode

| State Coding                     |                        |
|----------------------------------|------------------------|
| Status word                      | FSA state              |
| xxxx xxxx x0xx 0000 <sub>h</sub> | Not ready to switch on |
| xxxx xxxx x1xx 0000 <sub>h</sub> | Switch on disabled     |
| xxxx xxxx x01x 0001 <sub>h</sub> | Ready to switch on     |
| xxxx xxxx x01x 0011 <sub>h</sub> | Switched on            |
| xxxx xxxx x01x 0111 <sub>h</sub> | Operation enabled      |
| xxxx xxxx x00x 0111 <sub>h</sub> | Quick stop active      |
| xxxx xxxx x0xx 1111 <sub>h</sub> | Fault reaction active  |
| xxxx xxxx x0xx 1000 <sub>h</sub> | Fault                  |

Table 249: State Coding

| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6041 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 250: Object Description (6041<sub>h</sub> in pv Mode)

| Entry Description |        |              |                        |               |
|-------------------|--------|--------------|------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range            | Default Value |
| 0                 | rw     | see CiA402-3 | See state coding above |               |

Table 251: Entry Description (6041<sub>h</sub> in pv Mode)

### 8.1.3 Object 6062<sub>h</sub>: Position Demand Value

This object provides the demanded position value. The value is given in microsteps. Object 6062<sub>h</sub> indicates the actual position that the motor should have. It is not to be confused with objects 6063<sub>h</sub> and 6064<sub>h</sub>.

| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 6062 <sub>h</sub>  | Position Demand Value | Variable    | SIGNED32  |

Table 252: Object Description (6062<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 253: Entry Description (6062<sub>h</sub>)

### 8.1.4 Object 6063<sub>h</sub>: Position Actual Internal Value

This object provides the demanded position value. The value is given in microsteps. It is the same as object 6062<sub>h</sub>.

| Object Description |                                |             |           |
|--------------------|--------------------------------|-------------|-----------|
| Index              | Name                           | Object Type | Data Type |
| 6063 <sub>h</sub>  | Position Actual Internal Value | Variable    | SIGNED32  |

Table 254: Object Description (6063<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 255: Entry Description (6063<sub>h</sub>)

### 8.1.5 Object 6064<sub>h</sub>: Position Actual Value

This object provides the actual value of the position measurement device. It always contains the same value as object 6063<sub>h</sub>.



| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 6064 <sub>h</sub>  | Position Actual Value | Variable    | SIGNED32  |

Table 256: Object Description (6064<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 257: Entry Description (6064<sub>h</sub>)

### 8.1.6 Object 6065<sub>h</sub>: Following Error Window

This object indicates the configured range of tolerated position values symmetrically to the position demand value. If the position actual value is out of the following error window, a following error occurs. A following error may occur when a drive is blocked, unreachable profile velocity occurs, or at wrong closed-loop coefficients. The value shall be given in microsteps.

When the difference between motor position (object 6062<sub>h</sub>) and encoder position (object 6063<sub>h</sub> or 6064<sub>h</sub>) is greater than the value set here, the motor will be stopped and an emergency message will be sent. Setting this object to zero will turn off this feature completely.

---

**Note** Setting this object to a too low value will lead to false alarms.

---

| Object Description |                        |             |            |
|--------------------|------------------------|-------------|------------|
| Index              | Name                   | Object Type | Data Type  |
| 6065 <sub>h</sub>  | Following Error Window | Variable    | UNSIGNED32 |

Table 258: Object Description (6065<sub>h</sub>)

| Entry Description |        |             |                |               |
|-------------------|--------|-------------|----------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range    | Default Value |
| 0                 | rw     | no          | 0...2147483647 | 0             |

Table 259: Entry Description (6065<sub>h</sub>)

### 8.1.7 Object 606C<sub>h</sub>: Velocity Actual Value

This object shows the actual velocity value of the motor. The value is given in internal or user-defined velocity units (depending on object 208C<sub>h</sub>, described in section 4.2.15).



| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 606C <sub>h</sub>  | Velocity Actual Value | Variable    | SIGNED32  |

Table 260: Object Description (606C<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 261: Entry Description (606C<sub>h</sub>)

### 8.1.8 Object 607D<sub>h</sub>: Software Position Limit

This object indicates the configured maximal and minimal software position limits. These parameters define the absolute position limits for the position demand value and the position actual value. Every new target position is checked against these limits. The limit positions are always relative to the machine home position. Before being compared with the target position, they are corrected internally by the home offset as follows:

$$\text{Corrected\_min\_position\_limit} = \text{min\_position\_limit} - \text{home\_offset}$$

$$\text{Corrected\_max\_position\_limit} = \text{max\_position\_limit} - \text{home\_offset}$$

| Object Description |                         |             |           |
|--------------------|-------------------------|-------------|-----------|
| Index              | Name                    | Object Type | Data Type |
| 607D <sub>h</sub>  | Software Position Limit | Array       | SIGNED32  |

Table 262: Object Description (607D<sub>h</sub>)

| Entry Description |                        |        |             |             |               |
|-------------------|------------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description            | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Minimum Position Limit | rw     | no          | SIGNED32    | -2147483648   |
| 2                 | Maximum Position Limit | rw     | no          | SIGNED32    | 2147483647    |

Table 263: Entry Description (607D<sub>h</sub>)

### 8.1.9 Object 6083<sub>h</sub>: Profile Acceleration

This object indicates the configured acceleration. Object 6083<sub>h</sub> sets the maximum acceleration to be used in profile position and profile velocity mode.

The units for object 6083<sub>h</sub> can be chosen with object 208E<sub>h</sub>, described in section 4.2.16.



In profile velocity mode, this object also sets the deceleration to be used (the deceleration ramp is always the same as the acceleration ramp in pv mode).

| Object Description |                      |             |           |
|--------------------|----------------------|-------------|-----------|
| Index              | Name                 | Object Type | Data Type |
| 6083 <sub>h</sub>  | Profile Acceleration | Variable    | SIGNED32  |

Table 264: Object Description (6083<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | SIGNED32    | 0             |

Table 265: Entry Description (6083<sub>h</sub>)

#### 8.1.10 Object 6085<sub>h</sub>: Quick Stop Deceleration

This object indicates the configured deceleration used to stop the motor when the quick stop function is activated and the quick stop code object 605A<sub>h</sub> is set to 2 (or 6). The value is given in the same unit as profile acceleration object 6083<sub>h</sub>.

| Object Description |                         |             |            |
|--------------------|-------------------------|-------------|------------|
| Index              | Name                    | Object Type | Data Type  |
| 6085 <sub>h</sub>  | Quick stop deceleration | Variable    | UNSIGNED32 |

Table 266: Object Description (6085<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED32  | 51200         |

Table 267: Entry Description (6085<sub>h</sub>)

#### 8.1.11 Object 60FF<sub>h</sub>: Target Velocity

This object indicates the configured target velocity and is used as input for the trajectory generator. Object 60FF<sub>h</sub> sets the target velocity when using profile velocity mode. The drive then accelerates or decelerates to that velocity using the acceleration and deceleration set by objects 6083<sub>h</sub> and 6084<sub>h</sub>. The values are given in units which can be selected with object 208C<sub>h</sub>, described in section 4.2.15.

| Object Description |                 |             |           |
|--------------------|-----------------|-------------|-----------|
| Index              | Name            | Object Type | Data Type |
| 60FF <sub>h</sub>  | Target Velocity | Variable    | SIGNED32  |

Table 268: Object Description (60FF<sub>h</sub>)



| Entry Description |        |              |             |               |
|-------------------|--------|--------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range | Default Value |
| 0                 | rw     | see CiA402-3 | SIGNED32    | 0             |

Table 269: Entry Description (60FF<sub>h</sub>)

## 8.2 How to move a Motor in pv Mode

Here is a little example that shows how to get a motor running in pv mode. In this little example we assume that the module has been reset (and then switched to pre-operational or operational) by NMT commands before.

- If you do not have any limit switches connected, first disable the limit switch inputs by writing 3 to object 2005<sub>h</sub>.
- Select pv mode by writing 3 to object 6060<sub>h</sub>.
- Write 6 to object 6040<sub>h</sub> to switch to READY\_TO\_SWITCH\_ON state.
- Write 7 to object 6040<sub>h</sub> to switch to SWITCHED\_ON state.
- Write 15 to object 6040<sub>h</sub> to switch to OPERATION\_ENABLED state.
- Write the desired target speed (e.g. 1000) to object 60FF<sub>h</sub>. The motor now accelerates to that speed.
- Stop the motor by writing 0 to object 60FF<sub>h</sub>.



## 9 Homing Mode

This chapter describes the method by which a drive seeks the home position (reference point). There are various methods of achieving this using limit switches at the ends of travel or a home switch in mid-travel. Some methods also use the index (zero) pulse train from an incremental encoder. The user may specify the speeds, acceleration and the method of homing.

There is no output data except for those bits in the statusword which return the status or result of the homing process and the demand to the position control loops.

There are four sources of the homing signal available: these are positive and negative limit switches, the home switch and the index pulse from an encoder.

Figure 9 shows the defined input objects as well as the output objects. The user can specify the speeds, acceleration and method of homing. The home offset object 607C<sub>h</sub> allows displacing the zero in point the coordinate system for the home position.

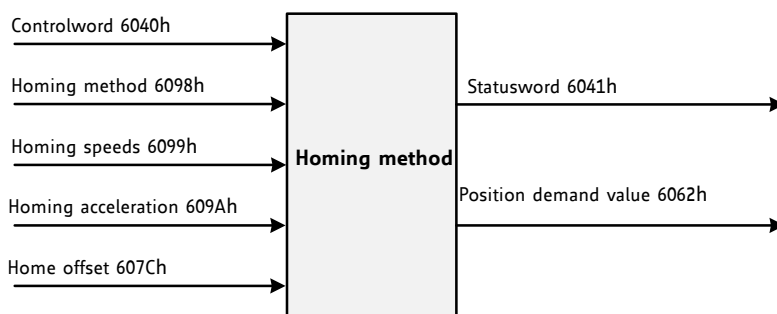


Figure 9: Homing Mode Function

Choosing a homing mode determines the following things:

- The homing signal (positive limit switch, negative limit switch, and home switch).
- The direction of actuation where appropriate.
- The position of the index pulse.

The home position and the zero position are offset by the home offset (see object 607C<sub>h</sub>, section 9.2.4).

Depending on the module there are different sources of homing methods available:

- Negative and positive limit switches.
- Home switch.
- Index pulse of an encoder.

For the operation of positioning drives, an exact knowledge of the absolute position is normally required. Since for cost reasons drives often do not have an absolute encoder, a homing operation is necessary.



## 9.1 Homing Methods

The PD-1180 supports a subset of different standard CANopen homing methods. The homing method that is to be used can be chosen via object 6098<sub>h</sub> (section 9.2.5).

| Supported Homing Methods |                                                                                                                                                   |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Method                   | Description                                                                                                                                       |
| 0                        | No homing (default value for object 6098 <sub>h</sub> ).                                                                                          |
| 1                        | Search the left end switch, then search the next encoder index pulse.                                                                             |
| 2                        | Search the right end switch, then search the next encoder index pulse.                                                                            |
| 3                        | Search the positive edge of the home switch, then search the next encoder index pulse.                                                            |
| 5                        | Search the negative edge of the home switch, then search the next encoder index pulse.                                                            |
| 17                       | Search the left end switch.                                                                                                                       |
| 18                       | Search the right end switch.                                                                                                                      |
| 19                       | Search the positive edge of the home switch.                                                                                                      |
| 21                       | Search the negative edge of the home switch.                                                                                                      |
| 33                       | Search next index pulse in negative direction.                                                                                                    |
| 34                       | Search next index pulse in positive direction.                                                                                                    |
| 35                       | The actual position is used as home position. All position values (objects 6062h, 6063h, and 6064h) are set to zero, but the motor will not move. |

Table 270: Supported CANopen Homing Methods

When using homing methods that need end switch inputs or home switch inputs please take care of their configuration (object 2005<sub>h</sub>, section 4.2.6).

### 9.1.1 Homing Method 1: Homing on negative Limit Switch and Index Pulse

Using this method, the initial direction of movement shall be leftward if the negative limit switch is inactive (here: low). The home position shall be at the first index pulse to the right of the position where the negative limit switch becomes inactive.

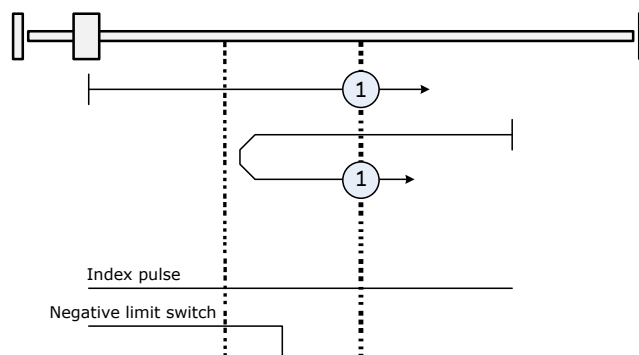


Figure 10: Homing Method 1



### 9.1.2 Homing Method 2: Homing on positive Limit Switch and Index Pulse

Using this method, the initial direction of movement shall be rightward if the positive limit switch is inactive (here: low). The position of home shall be at the first index pulse to the left of the position where the positive limit switch becomes inactive.

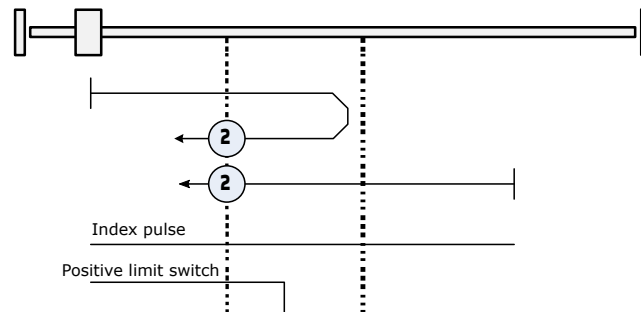


Figure 11: Homing Method 2

### 9.1.3 Homing Method 3: Homing on positive Home Switch and Index Pulse

Using this method, the initial direction of movement shall be dependent on the state of the home switch. The home position shall be at the index pulse to either to the left or the right of the point where the home switch changes state. If the initial position is situated so that the direction of movement shall reverse during homing, the point at which the reversal takes place is anywhere after a change of state of the home switch.

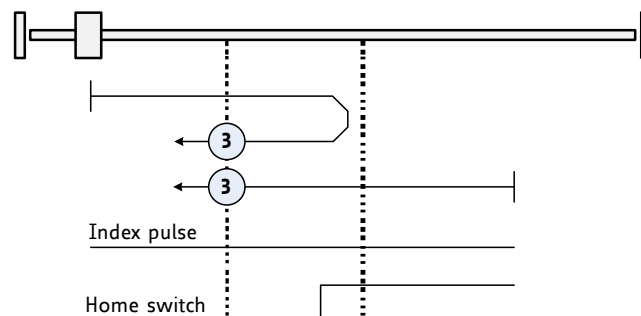


Figure 12: Homing Method 3

### 9.1.4 Homing Method 5: Homing on negative Home Switch and Index Pulse

Using this method, the initial direction of movement shall be dependent on the state of the home switch. The home position shall be at the index pulse to either to the left or the right of the point where the home switch changes state. If the initial position is situated so that the direction of movement shall reverse during homing, the point at which the reversal takes place is anywhere after a change of state of the home switch.



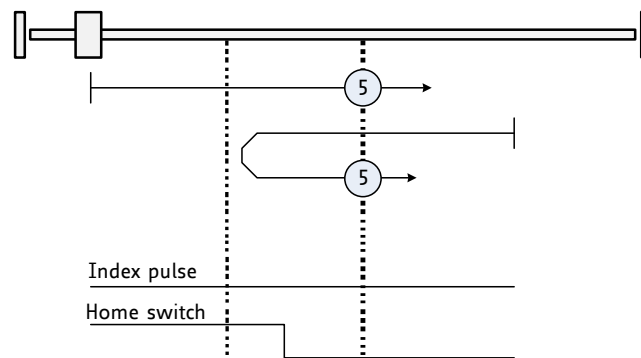


Figure 13: Homing Method 5

### 9.1.5 Homing Method 17: Homing on negative Limit Switch

Using this method, the initial direction of movement shall be leftward if the negative limit switch is inactive (here: low). The home position shall be at the point where the negative limit switch becomes inactive.

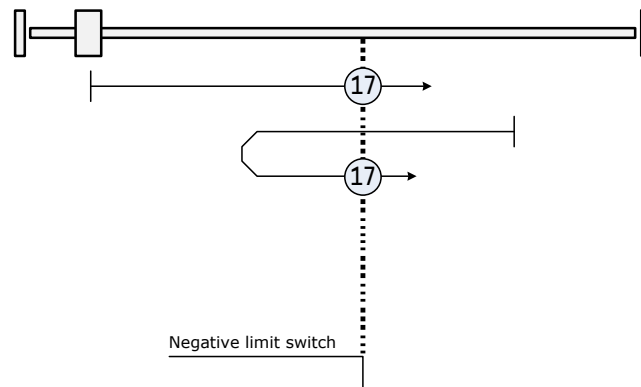


Figure 14: Homing Method 17

### 9.1.6 Homing Method 18: Homing on positive Limit Switch

Using this method, the initial direction of movement shall be rightward if the positive limit switch is inactive (here: low). The home position shall be at the point where the positive limit switch becomes inactive.

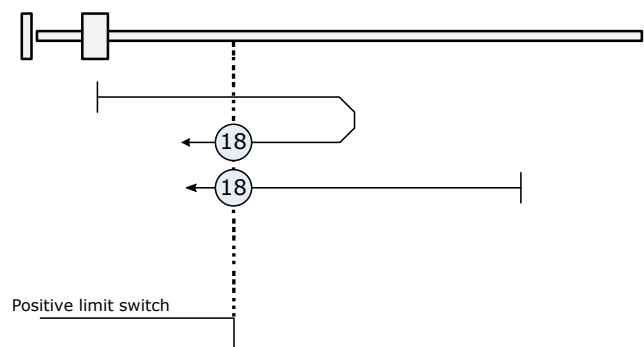


Figure 15: Homing Method 18



### 9.1.7 Homing Method 19: Homing on positive Home Switch

Using this method, the initial direction of movement shall be dependent on the state of the home switch. The home position shall be at the point where the home switch changes state. If the initial direction of movement leads away from the home switch, the drive shall reverse on encountering the relevant limit switch.

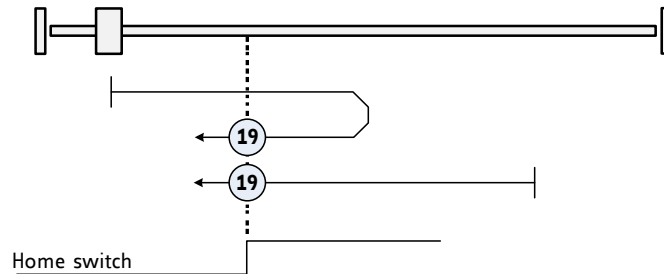


Figure 16: Homing Method 19

### 9.1.8 Homing Method 21: Homing on negative Home Switch

Using this method, the initial direction of movement shall be dependent on the state of the home switch. The home position shall be at the point where the home switch changes state. If the initial direction of movement leads away from the home switch, the drive shall reverse on encountering the relevant limit switch.

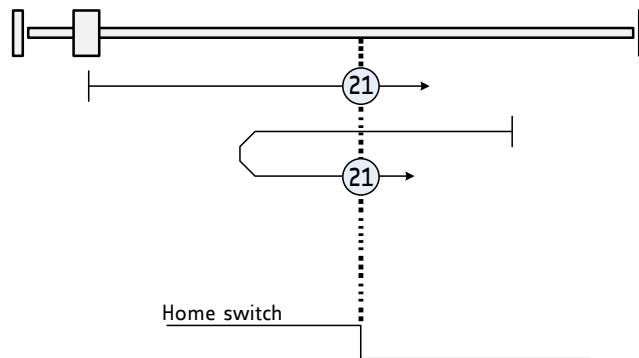


Figure 17: Homing Method 21

### 9.1.9 Homing Method 33 and 34: Homing on next Index Pulse

Using these methods, the direction of homing is negative or positive respectively. The home position shall be at the index pulse found in the selected direction.



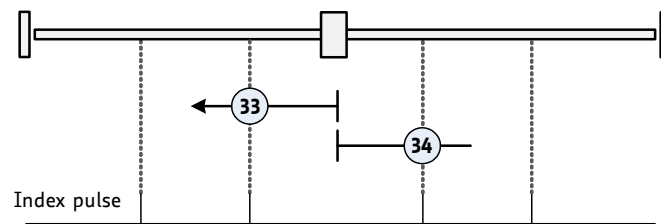


Figure 18: Homing Methods 33 and 34

#### 9.1.10 Homing Method 35: Current Position as Home Position

In this method, the current position shall be taken to be the home position. This method does not require the drive device to be in operation enabled state.



## 9.2 Detailed Object Specifications

### 9.2.1 Object 6040<sub>h</sub>: Control Word

This object indicates the received command controlling the power drive system finite state automaton (PDS FSA). The CiA-402 state machine can be controlled using this object. Please refer to figure 8 for detailed information.

| Structure of the Control Word |    |     |   |    |     |     |    |    |    |     |
|-------------------------------|----|-----|---|----|-----|-----|----|----|----|-----|
| 15                            | 11 | 10  | 9 | 8  | 7   | 6   | 4  | 3  | 2  | 1 0 |
| nu                            | r  | oms | h | fr | oms | eo  | qs | ev | so |     |
| MSB                           |    |     |   |    |     | LSB |    |    |    |     |

Legend: nu=not used; r=reserved; oms=operation mode specific; h=halt; fr=fault reset; eo=enable operation; qs=quick stop; ev=enable voltage; so=switch on.

Table 271: Structure of the Control Word in hm Mode

| Operation Mode specific Bits in hm Mode |                        |                                 |
|-----------------------------------------|------------------------|---------------------------------|
| Bit                                     | Name                   | Definition                      |
| 4                                       | Homing operation start | 1: start homing; 0: stop homing |
| 8                                       | Halt                   | Not supported.                  |

Table 272: Operation Mode specific Bits in hm Mode

| Command Coding               |                      |       |       |       |       |             |
|------------------------------|----------------------|-------|-------|-------|-------|-------------|
| Command                      | Bits of Control Word |       |       |       |       | Transitions |
|                              | Bit 7                | Bit 3 | Bit 2 | Bit 1 | Bit 0 |             |
| Shutdown                     | 0                    | x     | 1     | 1     | 0     | 2,6,8       |
| Switch on                    | 0                    | 0     | 1     | 1     | 1     | 3           |
| Switch on & enable operation | 0                    | 1     | 1     | 1     | 1     | 3, 4        |
| Disable voltage              | 0                    | x     | x     | 0     | x     | 7,9,10,12   |
| Quick stop                   | 0                    | x     | 0     | 1     | x     | 7,10,11     |
| Disable operation            | 0                    | 0     | 1     | 1     | 1     | 5           |
| Enable operation             | 0                    | 1     | 1     | 1     | 1     | 4, 16       |
| Fault reset                  | 0-to-1               | x     | x     | x     | x     | 15          |

Table 273: Command Coding



| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6040 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 274: Object Description (6040<sub>h</sub> in hm Mode)

| Entry Description |        |              |                           |               |
|-------------------|--------|--------------|---------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range               | Default Value |
| 0                 | rw     | see CiA402-3 | See command coding above. |               |

Table 275: Entry Description (6040<sub>h</sub> in hm Mode)

### 9.2.2 Object 6041<sub>h</sub>: Status Word

This object provides the status of the PDS FSA. It reflects the status of the CiA-402 state machine. Please refer to figure 8 for detailed information. The object is structured as defined below.

For more information about the coding please refer to the CANopen Drives and motion control device profile, part 2.

| Structure of the Status Word |     |     |     |    |    |    |   |     |    |    |   |    |    |      |   |
|------------------------------|-----|-----|-----|----|----|----|---|-----|----|----|---|----|----|------|---|
| 15                           | 14  | 13  | 12  | 11 | 10 | 9  | 8 | 7   | 6  | 5  | 4 | 3  | 2  | 1    | 0 |
| dir                          | mot | oms | ila | tr | rm | ms | w | sod | qs | ve | f | oe | so | rtso |   |
| MSB                          |     |     |     |    |    |    |   |     |    |    |   |    |    | LSB  |   |

Legend: nu=not used; r=reserved; oms=operation mode specific; h=halt; fr=fault reset; oe=operation enable; qs=quick stop; ve=voltage enable; so=switch on.

Table 276: Structure of the Status Word in hm Mode

| Trinamic Specific Bits |                       |                                             |
|------------------------|-----------------------|---------------------------------------------|
| Bit                    | Name                  | Definition                                  |
| 14                     | Motor activity        | 0: Motor stands still.<br>1: Motor rotates. |
| 15                     | Direction of rotation | This bit shows the direction of rotation.   |

Table 277: Trinamic Specific Bits



| Operation Mode specific Bits in hm Mode |                |                                                                                                            |
|-----------------------------------------|----------------|------------------------------------------------------------------------------------------------------------|
| Bit                                     | Name           | Definition                                                                                                 |
| 10                                      | Target reached | Set when the zero position has been found or homing has been stopped by setting controlword bit 4 to zero. |
| 12                                      | Home attained  | Set when zero position has been found.                                                                     |
| 13                                      | Homing error   | Not supported.                                                                                             |

Table 278: Operation Mode specific Bits in hm Mode

| State Coding                     |                        |
|----------------------------------|------------------------|
| Status word                      | FSA state              |
| xxxx xxxx x0xx 0000 <sub>h</sub> | Not ready to switch on |
| xxxx xxxx x1xx 0000 <sub>h</sub> | Switch on disabled     |
| xxxx xxxx x01x 0001 <sub>h</sub> | Ready to switch on     |
| xxxx xxxx x01x 0011 <sub>h</sub> | Switched on            |
| xxxx xxxx x01x 0111 <sub>h</sub> | Operation enabled      |
| xxxx xxxx x00x 0111 <sub>h</sub> | Quick stop active      |
| xxxx xxxx x0xx 1111 <sub>h</sub> | Fault reaction active  |
| xxxx xxxx x0xx 1000 <sub>h</sub> | Fault                  |

Table 279: State Coding

| Object Description |             |             |            |
|--------------------|-------------|-------------|------------|
| Index              | Name        | Object Type | Data Type  |
| 6041 <sub>h</sub>  | Controlword | Variable    | UNSIGNED16 |

Table 280: Object Description (6041<sub>h</sub> in hm Mode)

| Entry Description |        |              |                         |               |
|-------------------|--------|--------------|-------------------------|---------------|
| Sub-index         | Access | PDO Mapping  | Value Range             | Default Value |
| 0                 | rw     | see CiA402-3 | See state coding above. |               |

Table 281: Entry Description (6041<sub>h</sub> in hm Mode)

### 9.2.3 Object 606C<sub>h</sub>: Velocity Actual Value

This object shows the actual velocity value of the motor. The value is given in internal or user-defined velocity units (depending on object 208C<sub>h</sub>, described in section 4.2.15).



| Object Description |                       |             |           |
|--------------------|-----------------------|-------------|-----------|
| Index              | Name                  | Object Type | Data Type |
| 606C <sub>h</sub>  | Velocity Actual Value | Variable    | SIGNED32  |

Table 282: Object Description (606C<sub>h</sub>)

| Entry Description |        |                   |             |               |
|-------------------|--------|-------------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping       | Value Range | Default Value |
| 0                 | ro     | Refer to CiA402-3 | SIGNED32    | no            |

Table 283: Entry Description (606C<sub>h</sub>)

#### 9.2.4 Object 607C<sub>h</sub>: Home Offset

This object indicates the configured difference between the zero position for the application and the machine home position/home switch (found during homing). While homing, the machine home position is found and once the homing is completed, the zero position is offset from the home position by adding the home offset to the home position. The effect of setting the home position to a non-zero value depends on the selected homing method. The value of this object is given in microsteps. Negative values indicate the opposite direction.

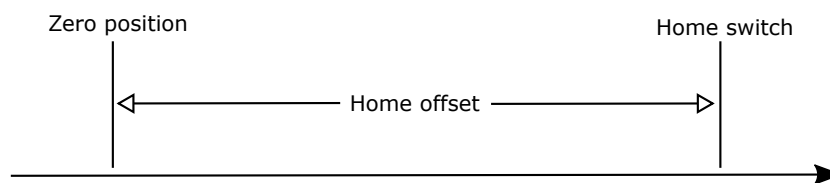


Figure 19: Home Offset

| Object Description |             |             |           |
|--------------------|-------------|-------------|-----------|
| Index              | Name        | Object Type | Data Type |
| 607C <sub>h</sub>  | Home offset | Variable    | SIGNED32  |

Table 284: Object Description (607C<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | SIGNED32    | 0             |

Table 285: Entry Description (607C<sub>h</sub>)

### 9.2.5 Object 6098<sub>h</sub>: Homing Method

The homing method to be used can be selected by writing to this object. Please see table 270 for a list of homing methods supported by the current version of the PD-1180 CANopen firmware.

| Object Description |               |             |           |
|--------------------|---------------|-------------|-----------|
| Index              | Name          | Object Type | Data Type |
| 6098 <sub>h</sub>  | Homing method | Variable    | SIGNED8   |

Table 286: Object Description (6098<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | SIGNED8     | 0             |

Table 287: Entry Description (6098<sub>h</sub>)

### 9.2.6 Object 6099<sub>h</sub>: Homing Speeds

This object indicates the configured speeds used during homing procedure. The values are given in pps units or internal units selectable with object 208C<sub>h</sub> (section 4.2.15). Using object 6099<sub>h</sub> a fast and a slow homing speed can be set. In most homing modes, the home switch is searched with the fast speed first. When the home switch has been found, the motor will be decelerated to the slow speed (using the homing acceleration, object 609A<sub>h</sub>) to search for the exact switch point. When the switch point has been found the motor will be stopped at that point.

| Object Description |               |             |            |
|--------------------|---------------|-------------|------------|
| Index              | Name          | Object Type | Data Type  |
| 6099 <sub>h</sub>  | Homing speeds | Array       | UNSIGNED32 |

Table 288: Object Description (6099<sub>h</sub>)

| Entry Description |                   |        |             |             |               |
|-------------------|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Description       | Access | PDO Mapping | Value Range | Default Value |
| 1                 | Fast homing speed | rw     | no          | UNSIGNED32  | 0             |
| 2                 | Slow homing speed | rw     | no          | UNSIGNED32  | 0             |

Table 289: Entry Description (6099<sub>h</sub>)

### 9.2.7 Object 609A<sub>h</sub>: Homing Acceleration

This object indicates the configured acceleration and deceleration to be used during homing operation. The value is given in units selected by object 208E<sub>h</sub> (section 4.2.16).



| Object Description |                     |             |            |
|--------------------|---------------------|-------------|------------|
| Index              | Name                | Object Type | Data Type  |
| 609A <sub>h</sub>  | Homing acceleration | Variable    | UNSIGNED32 |

Table 290: Object Description (609A<sub>h</sub>)

| Entry Description |        |             |             |               |
|-------------------|--------|-------------|-------------|---------------|
| Sub-index         | Access | PDO Mapping | Value Range | Default Value |
| 0                 | rw     | no          | UNSIGNED32  | 0             |

Table 291: Entry Description (609A<sub>h</sub>)

### 9.3 How to start a Homing in hm Mode

Here is a little example that shows how to home the motor in hm mode. In this little example we assume that the module has been reset (and then switched to pre-operational or operational) by NMT commands before. The home switch must be connected to the home switch input. It can be operated manually.

- Select hm mode by writing 6 to object 6060<sub>h</sub>.
- Write 6 to object 6040<sub>h</sub> to switch to READY\_TO\_SWITCH\_ON state.
- Write 7 to object 6040<sub>h</sub> to switch to SWITCHED\_ON state.
- Write 15 to object 6040<sub>h</sub> to switch to OPERATION\_ENABLED state.
- Select homing method 19 by writing 19 to object 6098<sub>h</sub>.
- Set the homing speeds by writing e.g. 50000 to object 6099<sub>h</sub> sub index 1 and e.g. 10000 to object 6099<sub>h</sub> sub index 2.
- Write 31 to object 6040<sub>h</sub> to start the homing process.
- Press and release the home switch.
- When homing has finished, write 15 to object 6040<sub>h</sub> again.



## 10 Emergency Messages (EMCY)

The module sends an emergency message if an error occurs. The message contains information about the error type. The module can map internal errors and object 1001<sub>h</sub> (error register) is part of every emergency object.

| Emergency Messages (EMCY) of the PD-1180 |                 |     |   |   |   |                                                                                                                                                                                                      |
|------------------------------------------|-----------------|-----|---|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Error code                               | Additional byte |     |   |   |   | Description                                                                                                                                                                                          |
|                                          | 1               | 2   | 3 | 4 | 5 |                                                                                                                                                                                                      |
| 0000 <sub>h</sub>                        | 0               | 0   | 0 | 0 | 0 | <b>Fault reset</b><br>The fault reset command has been executed.                                                                                                                                     |
| 1000 <sub>h</sub>                        | 1               | 0   | 0 | 0 | 0 | <b>Generic error: open load bridge A</b><br>The motor driver indicates open load on bridge A. It is possible that the motor cable is broken or that there is an error in the power amplifier itself. |
| 1000 <sub>h</sub>                        | 2               | 0   | 0 | 0 | 0 | <b>Generic error: open load bridge B</b><br>The motor driver indicates open load on bridge B. It is possible that the motor cable is broken or that there is an error in the power amplifier itself. |
| 2310 <sub>h</sub>                        | 0               | 0   | 0 | 0 | 0 | <b>Overcurrent high side</b><br>The motor driver indicates an overcurrent on the high side. This can be caused by a short circuit in the driver stage.                                               |
| 2311 <sub>h</sub>                        | 0               | 0   | 0 | 0 | 0 | <b>Overcurrent bridge B</b><br>The motor driver indicates that there is overcurrent on bridge B. This can be caused by a short circuit in the motor itself or in the motor driver stage.             |
| 2312 <sub>h</sub>                        | 0               | 0   | 0 | 0 | 0 | <b>Overcurrent bridge A</b><br>The motor driver indicates that there is overcurrent on bridge A. This can be caused by a short circuit in the motor itself or in the motor driver stage.             |
| 3230 <sub>h</sub>                        | 0               | 0   | 0 | 0 | 0 | <b>stallGuard2 error</b><br>The actual load value exceeds the stallGuard2 limit.                                                                                                                     |
| 4310 <sub>h</sub>                        | 1               | 0   | 0 | 0 | 0 | <b>Overtemperature pre-warning</b><br>The temperature in the motor driver exceeds the pre-warning limit.                                                                                             |
| 4310 <sub>h</sub>                        | 2               | 0   | 0 | 0 | 0 | <b>Overtemperature error</b><br>The motor driver has been switched off because the temperature limit has been exceeded.                                                                              |
| 5441 <sub>h</sub>                        | 0               | 255 | 0 | 0 | 0 | <b>Shutdown switch active</b><br>The enable signal is missing (due to the shutdown switch) and the motor driver has been switched off.                                                               |
| 6320 <sub>h</sub>                        | 0               | 255 | 0 | 0 | 0 | <b>Parameter error</b><br>The data in the received PDO is either wrong or cannot be accepted due to the internal state of the drive.                                                                 |
| 8100 <sub>h</sub>                        | 0               | 255 | 0 | 0 | 0 | <b>Communication error</b><br>General CAN bus communication error.                                                                                                                                   |



| Error code        | Additional byte |     |   |   |   | Description                                                                                                                                                                                                                                                                                |
|-------------------|-----------------|-----|---|---|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | 1               | 2   | 3 | 4 | 5 |                                                                                                                                                                                                                                                                                            |
| 8110 <sub>h</sub> | 1               | 255 | 0 | 0 | 0 | <b>CAN controller overflow</b><br>The receive message buffer of the CAN controller hardware is full and some CAN messages are lost.                                                                                                                                                        |
| 8110 <sub>h</sub> | 2               | 255 | 0 | 0 | 0 | <b>CAN Tx buffer overflow</b><br>The software CAN transmit buffer is full and thus some CAN messages are lost.                                                                                                                                                                             |
| 8110 <sub>h</sub> | 3               | 255 | 0 | 0 | 0 | <b>CAN Rx buffer overflow</b><br>The software CAN receive buffer is full and so some CAN messages are lost.                                                                                                                                                                                |
| 8120 <sub>h</sub> | 0               | 255 | 0 | 0 | 0 | <b>CAN error passive</b><br>The CAN controller has detected communication errors and has entered the CAN Error passive state.                                                                                                                                                              |
| 8130 <sub>h</sub> | 0               | 255 | 0 | 0 | 0 | <b>Heartbeat or lifeguard error</b><br>The module did not receive a heartbeat or lifeguard message in time.                                                                                                                                                                                |
| 8140 <sub>h</sub> | 0               | 255 | 0 | 0 | 0 | <b>CAN controller recovered from bus-off state</b><br>The CAN controller has detected too many errors and has changed into the bus-off state. The drive has been stopped and disabled. This message is sent after the CAN controller has recovered from bus-off state and is bus-on again. |
| 8210 <sub>h</sub> | 0               | 255 | 0 | 0 | 0 | <b>PDO not processed due to length error</b><br>A PDO sent to the module could not be processed because too few bytes were supplied.                                                                                                                                                       |
| 8220 <sub>h</sub> | 0               | 255 | 0 | 0 | 0 | <b>PDO length exceeded</b><br>A PDO sent to the module could not be processed because too many bytes were supplied.                                                                                                                                                                        |
| 8611 <sub>h</sub> | 0               | 0   | 0 | 0 | 0 | <b>Following error</b><br>The deviation between motor position counter and encoder position counter has exceeded the following error window.                                                                                                                                               |
| ff00 <sub>h</sub> | 0               | 0   | 0 | 0 | 0 | <b>Undervoltage</b><br>The supply voltage is too low to drive a motor.                                                                                                                                                                                                                     |
| ff01 <sub>h</sub> | 1               | 0   | 0 | 0 | 0 | <b>Positive software limit</b><br>The actual position is outside the range defined by object 607d <sub>h</sub> .                                                                                                                                                                           |
| ff01 <sub>h</sub> | 2               | 0   | 0 | 0 | 0 | <b>Negative software limit</b><br>The actual position is outside the range defined by object 607d <sub>h</sub> .                                                                                                                                                                           |
| ff01 <sub>h</sub> | 3               | 0   | 0 | 0 | 0 | <b>Positive limit switch</b><br>The positive limit switch has been touched outside of the homing function.                                                                                                                                                                                 |
| ff01 <sub>h</sub> | 4               | 0   | 0 | 0 | 0 | <b>Negative limit switch</b><br>The negative limit switch has been touched outside of the homing function.                                                                                                                                                                                 |



| Error code | Additional byte |   |   |   |   | Description |
|------------|-----------------|---|---|---|---|-------------|
|            | 1               | 2 | 3 | 4 | 5 |             |

*Table 292: Emergency Messages (EMCY)*

## 11 Figures Index

|   |                                                              |    |    |                                    |    |
|---|--------------------------------------------------------------|----|----|------------------------------------|----|
| 1 | stallGuard2 Load Measurement as a Function of Load . . . . . | 8  | 10 | Homing Method 1 . . . . .          | 91 |
| 2 | Energy Efficiency Example with CoolStep . . . . .            | 9  | 11 | Homing Method 2 . . . . .          | 92 |
| 3 | NMT State Machine . . . . .                                  | 12 | 12 | Homing Method 3 . . . . .          | 92 |
| 4 | Communication Architecture . . . . .                         | 13 | 13 | Homing Method 5 . . . . .          | 93 |
| 5 | Device Model . . . . .                                       | 14 | 14 | Homing Method 17 . . . . .         | 93 |
| 6 | CoolStep Adjustment Points and Thresholds . . . . .          | 30 | 15 | Homing Method 18 . . . . .         | 93 |
| 7 | Brake Output Timing . . . . .                                | 33 | 16 | Homing Method 19 . . . . .         | 94 |
| 8 | DS402 Finite State Machine . . . . .                         | 64 | 17 | Homing Method 21 . . . . .         | 94 |
| 9 | Homing Mode Function . . . . .                               | 90 | 18 | Homing Methods 33 and 34 . . . . . | 95 |
|   |                                                              |    | 19 | Home Offset . . . . .              | 99 |



## 12 Tables Index

|    |                                                   |    |     |                                                   |    |
|----|---------------------------------------------------|----|-----|---------------------------------------------------|----|
| 1  | Abbreviations used in this Manual . . .           | 7  | 53  | Object Description (2000 <sub>h</sub> ) . . . . . | 32 |
| 2  | Service Primitives . . . . .                      | 10 | 54  | Entry Description (2000 <sub>h</sub> ) . . . . .  | 32 |
| 3  | Service Types . . . . .                           | 11 | 55  | Object Description (2001 <sub>h</sub> ) . . . . . | 32 |
| 4  | Object Dictionary . . . . .                       | 14 | 56  | Entry Description (2001 <sub>h</sub> ) . . . . .  | 32 |
| 5  | Object Description (1000 <sub>h</sub> ) . . . . . | 16 | 57  | Object Description (2002 <sub>h</sub> ) . . . . . | 33 |
| 6  | Entry Description (1000 <sub>h</sub> ) . . . . .  | 16 | 58  | Entry Description (2002 <sub>h</sub> ) . . . . .  | 33 |
| 7  | Object Description (1001 <sub>h</sub> ) . . . . . | 16 | 59  | Object Description (2003 <sub>h</sub> ) . . . . . | 33 |
| 8  | Entry Description (1001 <sub>h</sub> ) . . . . .  | 16 | 60  | Entry Description (2003 <sub>h</sub> ) . . . . .  | 33 |
| 9  | Error Register Bits . . . . .                     | 17 | 61  | Object Description (2004 <sub>h</sub> ) . . . . . | 34 |
| 10 | Value Definition (1005 <sub>h</sub> ) . . . . .   | 17 | 62  | Entry Description (2004 <sub>h</sub> ) . . . . .  | 34 |
| 11 | Object Description (1005 <sub>h</sub> ) . . . . . | 17 | 63  | Object Description (2005 <sub>h</sub> ) . . . . . | 34 |
| 12 | Entry Description (1005 <sub>h</sub> ) . . . . .  | 17 | 64  | Entry Description (2005 <sub>h</sub> ) . . . . .  | 34 |
| 13 | Object Description (1008 <sub>h</sub> ) . . . . . | 18 | 65  | Bit Definitions (2005 <sub>h</sub> ) . . . . .    | 35 |
| 14 | Entry Description (1008 <sub>h</sub> ) . . . . .  | 18 | 66  | Object Description (200A <sub>h</sub> ) . . . . . | 35 |
| 15 | Object Description (1009 <sub>h</sub> ) . . . . . | 18 | 67  | Entry Description (200A <sub>h</sub> ) . . . . .  | 35 |
| 16 | Entry Description (1009 <sub>h</sub> ) . . . . .  | 18 | 68  | Object Description (200B <sub>h</sub> ) . . . . . | 35 |
| 17 | Object Description (100A <sub>h</sub> ) . . . . . | 18 | 69  | Entry Description (200B <sub>h</sub> ) . . . . .  | 36 |
| 18 | Entry Description (100A <sub>h</sub> ) . . . . .  | 19 | 70  | Object Description (200C <sub>h</sub> ) . . . . . | 36 |
| 19 | Object Description (100C <sub>h</sub> ) . . . . . | 19 | 71  | Entry Description (200C <sub>h</sub> ) . . . . .  | 36 |
| 20 | Entry Description (100C <sub>h</sub> ) . . . . .  | 19 | 72  | Object Description (2085 <sub>h</sub> ) . . . . . | 36 |
| 21 | Object Description (100D <sub>h</sub> ) . . . . . | 19 | 73  | Entry Description (2085 <sub>h</sub> ) . . . . .  | 37 |
| 22 | Entry Description (100D <sub>h</sub> ) . . . . .  | 19 | 74  | Object Description (2086 <sub>h</sub> ) . . . . . | 37 |
| 23 | Save Signature . . . . .                          | 20 | 75  | Entry Description (2086 <sub>h</sub> ) . . . . .  | 37 |
| 24 | Object Description (1010 <sub>h</sub> ) . . . . . | 20 | 76  | Object Description (2087 <sub>h</sub> ) . . . . . | 37 |
| 25 | Entry Description (1010 <sub>h</sub> ) . . . . .  | 20 | 77  | Entry Description (2087 <sub>h</sub> ) . . . . .  | 38 |
| 26 | Load Signature . . . . .                          | 21 | 78  | Object Description (2088 <sub>h</sub> ) . . . . . | 38 |
| 27 | Object Description (1011 <sub>h</sub> ) . . . . . | 21 | 79  | Entry Description (2088 <sub>h</sub> ) . . . . .  | 38 |
| 28 | Entry Description (1011 <sub>h</sub> ) . . . . .  | 22 | 80  | Object Description (2089 <sub>h</sub> ) . . . . . | 38 |
| 29 | Object Description (1014 <sub>h</sub> ) . . . . . | 22 | 81  | Entry Description (2089 <sub>h</sub> ) . . . . .  | 39 |
| 30 | Entry Description (1014 <sub>h</sub> ) . . . . .  | 22 | 82  | Object Description (208C <sub>h</sub> ) . . . . . | 39 |
| 31 | Object Description (1015 <sub>h</sub> ) . . . . . | 22 | 83  | Entry Description (208C <sub>h</sub> ) . . . . .  | 39 |
| 32 | Entry Description (1015 <sub>h</sub> ) . . . . .  | 22 | 84  | Object Description (208E <sub>h</sub> ) . . . . . | 39 |
| 33 | Value Definition (1016 <sub>h</sub> ) . . . . .   | 23 | 85  | Entry Description (208E <sub>h</sub> ) . . . . .  | 40 |
| 34 | Object Description (1016 <sub>h</sub> ) . . . . . | 23 | 86  | Object Description (2092 <sub>h</sub> ) . . . . . | 40 |
| 35 | Entry Description (1016 <sub>h</sub> ) . . . . .  | 23 | 87  | Entry Description (2092 <sub>h</sub> ) . . . . .  | 40 |
| 36 | Object Description (1017 <sub>h</sub> ) . . . . . | 23 | 88  | Object Description (2093 <sub>h</sub> ) . . . . . | 40 |
| 37 | Entry Description (1017 <sub>h</sub> ) . . . . .  | 24 | 89  | Entry Description (2093 <sub>h</sub> ) . . . . .  | 40 |
| 38 | Object Description (1018 <sub>h</sub> ) . . . . . | 24 | 90  | Object Description (2094 <sub>h</sub> ) . . . . . | 41 |
| 39 | Entry Description (1018 <sub>h</sub> ) . . . . .  | 24 | 91  | Entry Description (2094 <sub>h</sub> ) . . . . .  | 41 |
| 40 | Object Description (1023 <sub>h</sub> ) . . . . . | 24 | 92  | Object Description (2095 <sub>h</sub> ) . . . . . | 41 |
| 41 | Entry Description (1023 <sub>h</sub> ) . . . . .  | 25 | 93  | Entry Description (2095 <sub>h</sub> ) . . . . .  | 41 |
| 42 | Object Description (1029 <sub>h</sub> ) . . . . . | 25 | 94  | Object Description (2096 <sub>h</sub> ) . . . . . | 42 |
| 43 | Entry Description (1029 <sub>h</sub> ) . . . . .  | 25 | 95  | Entry Description (2096 <sub>h</sub> ) . . . . .  | 42 |
| 44 | Object Description (1400 <sub>h</sub> ) . . . . . | 26 | 96  | Object Description (2097 <sub>h</sub> ) . . . . . | 42 |
| 45 | Entry Description (1400 <sub>h</sub> ) . . . . .  | 26 | 97  | Entry Description (2097 <sub>h</sub> ) . . . . .  | 42 |
| 46 | Object Description (1600 <sub>h</sub> ) . . . . . | 27 | 98  | Object Description (2098 <sub>h</sub> ) . . . . . | 43 |
| 47 | Entry Description (1600 <sub>h</sub> ) . . . . .  | 27 | 99  | Entry Description (2098 <sub>h</sub> ) . . . . .  | 43 |
| 48 | Object Description (1800 <sub>h</sub> ) . . . . . | 28 | 100 | Object Description (2099 <sub>h</sub> ) . . . . . | 43 |
| 49 | Entry Description (1800 <sub>h</sub> ) . . . . .  | 28 | 101 | Entry Description (2099 <sub>h</sub> ) . . . . .  | 43 |
| 50 | Object Description (1A00 <sub>h</sub> ) . . . . . | 29 | 102 | Object Description (209A <sub>h</sub> ) . . . . . | 44 |
| 51 | Entry Description (1A00 <sub>h</sub> ) . . . . .  | 29 | 103 | Entry Description (209A <sub>h</sub> ) . . . . .  | 44 |
| 52 | CoolStep related Objects . . . . .                | 31 | 104 | Object Description (209B <sub>h</sub> ) . . . . . | 44 |



|     |                                         |    |     |                                                   |    |
|-----|-----------------------------------------|----|-----|---------------------------------------------------|----|
| 105 | Entry Description (209B <sub>h</sub> )  | 44 | 159 | Entry Description (605B <sub>h</sub> )            | 58 |
| 106 | Object Description (209C <sub>h</sub> ) | 45 | 160 | Value Description (605C <sub>h</sub> )            | 58 |
| 107 | Entry Description (209C <sub>h</sub> )  | 45 | 161 | Object Description (605C <sub>h</sub> )           | 58 |
| 108 | Object Description (209D <sub>h</sub> ) | 45 | 162 | Entry Description (605C <sub>h</sub> )            | 59 |
| 109 | Entry Description (209D <sub>h</sub> )  | 45 | 163 | Value Description (605D <sub>h</sub> )            | 59 |
| 110 | Object Description (209E <sub>h</sub> ) | 46 | 164 | Object Description (605D <sub>h</sub> )           | 59 |
| 111 | Entry Description (209E <sub>h</sub> )  | 46 | 165 | Entry Description (605D <sub>h</sub> )            | 59 |
| 112 | Object Description (20A1 <sub>h</sub> ) | 46 | 166 | Value Description (605E <sub>h</sub> )            | 59 |
| 113 | Entry Description (20A1 <sub>h</sub> )  | 46 | 167 | Object Description (605E <sub>h</sub> )           | 60 |
| 114 | Object Description (20A4 <sub>h</sub> ) | 46 | 168 | Entry Description (605E <sub>h</sub> )            | 60 |
| 115 | Entry Description (20A4 <sub>h</sub> )  | 47 | 169 | Value Description (6060 <sub>h</sub> )            | 60 |
| 116 | Object Description (20A5 <sub>h</sub> ) | 47 | 170 | Object Description (6060 <sub>h</sub> )           | 60 |
| 117 | Entry Description (20A5 <sub>h</sub> )  | 47 | 171 | Entry Description (6060 <sub>h</sub> )            | 60 |
| 118 | Object Description (2100 <sub>h</sub> ) | 47 | 172 | Value Description (6061 <sub>h</sub> )            | 61 |
| 119 | Entry Description (2100 <sub>h</sub> )  | 47 | 173 | Object Description (6061 <sub>h</sub> )           | 61 |
| 120 | Object Description (2101 <sub>h</sub> ) | 48 | 174 | Entry Description (6061 <sub>h</sub> )            | 61 |
| 121 | Entry Description (2101 <sub>h</sub> )  | 48 | 175 | Value Description (606A <sub>h</sub> )            | 62 |
| 122 | Driver Error Flags (2102 <sub>h</sub> ) | 48 | 176 | Object Description (606A <sub>h</sub> )           | 62 |
| 123 | Object Description (2102 <sub>h</sub> ) | 48 | 177 | Entry Description (606A <sub>h</sub> )            | 62 |
| 124 | Entry Description (2102 <sub>h</sub> )  | 49 | 178 | Object Description (60FD <sub>h</sub> )           | 62 |
| 125 | Object Description (2107 <sub>h</sub> ) | 49 | 179 | Entry Description (60FD <sub>h</sub> )            | 62 |
| 126 | Entry Description (2107 <sub>h</sub> )  | 49 | 180 | Value Definition (6502 <sub>h</sub> )             | 63 |
| 127 | Object Description (210B <sub>h</sub> ) | 49 | 181 | Object Description (6502 <sub>h</sub> )           | 63 |
| 128 | Entry Description (210B <sub>h</sub> )  | 49 | 182 | Entry Description (6502 <sub>h</sub> )            | 63 |
| 129 | Object Description (2700 <sub>h</sub> ) | 50 | 183 | Structure of the Control Word in pp Mode          | 65 |
| 130 | Entry Description (2700 <sub>h</sub> )  | 50 | 184 | Operation Mode specific Bits in pp Mode           | 65 |
| 131 | Object Description (2701 <sub>h</sub> ) | 50 | 185 | Command Coding                                    | 65 |
| 132 | Entry Description (2701 <sub>h</sub> )  | 50 | 186 | Object Description (6040 <sub>h</sub> in pp Mode) | 66 |
| 133 | Bit Definitions (2702 <sub>h</sub> )    | 51 | 187 | Entry Description (6040 <sub>h</sub> in pp Mode)  | 66 |
| 134 | Object Description (2702 <sub>h</sub> ) | 51 | 188 | Structure of the Status Word in pp Mode           | 66 |
| 135 | Entry Description (2702 <sub>h</sub> )  | 51 | 189 | Trinamic Specific Bits                            | 66 |
| 136 | Bit Definitions (2703 <sub>h</sub> )    | 51 | 190 | Operation Mode specific Bits in pp Mode           | 67 |
| 137 | Object Description (2703 <sub>h</sub> ) | 51 | 191 | State Coding                                      | 67 |
| 138 | Entry Description (2703 <sub>h</sub> )  | 52 | 192 | Object Description (6041 <sub>h</sub> in pp Mode) | 67 |
| 139 | Object Description (2704 <sub>h</sub> ) | 52 | 193 | Entry Description (6041 <sub>h</sub> in pp Mode)  | 67 |
| 140 | Entry Description (2704 <sub>h</sub> )  | 52 | 194 | Object Description (6062 <sub>h</sub> )           | 68 |
| 141 | Object Description (2705 <sub>h</sub> ) | 53 | 195 | Entry Description (6062 <sub>h</sub> )            | 68 |
| 142 | Entry Description (2705 <sub>h</sub> )  | 53 | 196 | Object Description (6063 <sub>h</sub> )           | 68 |
| 143 | Object Description (2706 <sub>h</sub> ) | 53 | 197 | Entry Description (6063 <sub>h</sub> )            | 68 |
| 144 | Entry Description (2706 <sub>h</sub> )  | 53 | 198 | Object Description (6064 <sub>h</sub> )           | 68 |
| 145 | Object Description (2707 <sub>h</sub> ) | 54 | 199 | Entry Description (6064 <sub>h</sub> )            | 69 |
| 146 | Entry Description (2707 <sub>h</sub> )  | 54 | 200 | Object Description (6065 <sub>h</sub> )           | 69 |
| 147 | Object Description (2708 <sub>h</sub> ) | 54 | 201 | Entry Description (6065 <sub>h</sub> )            | 69 |
| 148 | Entry Description (2708 <sub>h</sub> )  | 54 | 202 | Object Description (6067 <sub>h</sub> )           | 70 |
| 149 | Object Description (270E <sub>h</sub> ) | 54 | 203 | Entry Description (6067 <sub>h</sub> )            | 70 |
| 150 | Entry Description (270E <sub>h</sub> )  | 55 | 204 | Object Description (6068 <sub>h</sub> )           | 70 |
| 151 | Value Description (2710 <sub>h</sub> )  | 55 | 205 | Entry Description (6068 <sub>h</sub> )            | 70 |
| 152 | Object Description (2710 <sub>h</sub> ) | 55 | 206 | Object Description (606C <sub>h</sub> )           | 70 |
| 153 | Entry Description (2710 <sub>h</sub> )  | 56 | 207 | Entry Description (606C <sub>h</sub> )            | 71 |
| 154 | Value Description (605A <sub>h</sub> )  | 57 | 208 | Object Description (607A <sub>h</sub> in pp Mode) | 71 |
| 155 | Object Description (605A <sub>h</sub> ) | 57 | 209 | Entry Description (607A <sub>h</sub> in pp Mode)  | 71 |
| 156 | Entry Description (605A <sub>h</sub> )  | 57 | 210 | Object Description (607D <sub>h</sub> )           | 71 |
| 157 | Value Description (605B <sub>h</sub> )  | 58 | 211 | Entry Description (607D <sub>h</sub> )            | 72 |
| 158 | Object Description (605B <sub>h</sub> ) | 58 |     |                                                   |    |



|                |                                                    |    |                |                                                   |     |
|----------------|----------------------------------------------------|----|----------------|---------------------------------------------------|-----|
| 212            | Object Description (6081 <sub>h</sub> ) . . . . .  | 72 | 255            | Entry Description (6063 <sub>h</sub> ) . . . . .  | 85  |
| 213            | Entry Description (6081 <sub>h</sub> ) . . . . .   | 72 | 256            | Object Description (6064 <sub>h</sub> ) . . . . . | 86  |
| 214            | Object Description (6083 <sub>h</sub> ) . . . . .  | 72 | 257            | Entry Description (6064 <sub>h</sub> ) . . . . .  | 86  |
| 215            | Entry Description (6083 <sub>h</sub> ) . . . . .   | 72 | 258            | Object Description (6065 <sub>h</sub> ) . . . . . | 86  |
| 216            | Object Description (6084 <sub>h</sub> ) . . . . .  | 73 | 259            | Entry Description (6065 <sub>h</sub> ) . . . . .  | 86  |
| 217            | Entry Description (6084 <sub>h</sub> ) . . . . .   | 73 | 260            | Object Description (606C <sub>h</sub> ) . . . . . | 87  |
| 218            | Object Description (6085 <sub>h</sub> ) . . . . .  | 73 | 261            | Entry Description (606C <sub>h</sub> ) . . . . .  | 87  |
| 219            | Entry Description (6085 <sub>h</sub> ) . . . . .   | 73 | 262            | Object Description (607D <sub>h</sub> ) . . . . . | 87  |
| 220            | Structure of the Control Word in vl Mode           | 75 | 263            | Entry Description (607D <sub>h</sub> ) . . . . .  | 87  |
| 221            | Command Coding . . . . .                           | 76 | 264            | Object Description (6083 <sub>h</sub> ) . . . . . | 88  |
| 222            | Object Description (6040 <sub>h</sub> in vl Mode)  | 76 | 265            | Entry Description (6083 <sub>h</sub> ) . . . . .  | 88  |
| 223            | Entry Description (6040 <sub>h</sub> in vl Mode) . | 76 | 266            | Object Description (6085 <sub>h</sub> ) . . . . . | 88  |
| 224            | Structure of the Status Word in vl Mode            | 76 | 267            | Entry Description (6085 <sub>h</sub> ) . . . . .  | 88  |
| 225            | Trinamic Specific Bits . . . . .                   | 77 | 268            | Object Description (60FF <sub>h</sub> ) . . . . . | 88  |
| 226            | Operation Mode specific Bits in vl Mode            | 77 | 269            | Entry Description (60FF <sub>h</sub> ) . . . . .  | 89  |
| 227            | State Coding . . . . .                             | 77 | 270            | Supported CANopen Homing Methods                  | 91  |
| 228            | Object Description (6041 <sub>h</sub> in vl Mode)  | 77 | 271            | Structure of the Control Word in hm               |     |
| 229            | Entry Description (6041 <sub>h</sub> in vl Mode) . | 78 | Mode . . . . . | 96                                                |     |
| 230            | Object Description (6042 <sub>h</sub> ) . . . . .  | 78 | 272            | Operation Mode specific Bits in hm                |     |
| 231            | Entry Description (6042 <sub>h</sub> ) . . . . .   | 78 | Mode . . . . . | 96                                                |     |
| 232            | Object Description (6043 <sub>h</sub> ) . . . . .  | 78 | 273            | Command Coding . . . . .                          | 96  |
| 233            | Entry Description (6043 <sub>h</sub> ) . . . . .   | 78 | 274            | Object Description (6040 <sub>h</sub> in hm Mode) | 97  |
| 234            | Object Description (6044 <sub>h</sub> ) . . . . .  | 79 | 275            | Entry Description (6040 <sub>h</sub> in hm Mode)  | 97  |
| 235            | Entry Description (6044 <sub>h</sub> ) . . . . .   | 79 | 276            | Structure of the Status Word in hm                |     |
| 236            | Object Description (6046 <sub>h</sub> ) . . . . .  | 79 | Mode . . . . . | 97                                                |     |
| 237            | Entry Description (6046 <sub>h</sub> ) . . . . .   | 79 | 277            | Trinamic Specific Bits . . . . .                  | 97  |
| 238            | Object Description (6048 <sub>h</sub> ) . . . . .  | 80 | 278            | Operation Mode specific Bits in hm                |     |
| 239            | Entry Description (6048 <sub>h</sub> ) . . . . .   | 80 | Mode . . . . . | 98                                                |     |
| 240            | Object Description (6049 <sub>h</sub> ) . . . . .  | 80 | 279            | State Coding . . . . .                            | 98  |
| 241            | Entry Description (6049 <sub>h</sub> ) . . . . .   | 80 | 280            | Object Description (6041 <sub>h</sub> in hm Mode) | 98  |
| 242            | Structure of the Control Word in pv                |    | 281            | Entry Description (6041 <sub>h</sub> in hm Mode)  | 98  |
| Mode . . . . . | 82                                                 |    | 282            | Object Description (606C <sub>h</sub> ) . . . . . | 99  |
| 243            | Command Coding . . . . .                           | 83 | 283            | Entry Description (606C <sub>h</sub> ) . . . . .  | 99  |
| 244            | Object Description (6040 <sub>h</sub> in pv Mode)  | 83 | 284            | Object Description (607C <sub>h</sub> ) . . . . . | 99  |
| 245            | Entry Description (6040 <sub>h</sub> in pv Mode)   | 83 | 285            | Entry Description (607C <sub>h</sub> ) . . . . .  | 99  |
| 246            | Structure of the Status Word in pv Mode            | 83 | 286            | Object Description (6098 <sub>h</sub> ) . . . . . | 100 |
| 247            | Trinamic Specific Bits . . . . .                   | 84 | 287            | Entry Description (6098 <sub>h</sub> ) . . . . .  | 100 |
| 248            | Operation Mode specific Bits in pv Mode            | 84 | 288            | Object Description (6099 <sub>h</sub> ) . . . . . | 100 |
| 249            | State Coding . . . . .                             | 84 | 289            | Entry Description (6099 <sub>h</sub> ) . . . . .  | 100 |
| 250            | Object Description (6041 <sub>h</sub> in pv Mode)  | 84 | 290            | Object Description (609A <sub>h</sub> ) . . . . . | 101 |
| 251            | Entry Description (6041 <sub>h</sub> in pv Mode)   | 85 | 291            | Entry Description (609A <sub>h</sub> ) . . . . .  | 101 |
| 252            | Object Description (6062 <sub>h</sub> ) . . . . .  | 85 | 292            | Emergency Messages (EMCY) . . . . .               | 104 |
| 253            | Entry Description (6062 <sub>h</sub> ) . . . . .   | 85 | 293            | Firmware Revision . . . . .                       | 111 |
| 254            | Object Description (6063 <sub>h</sub> ) . . . . .  | 85 | 294            | Document Revision . . . . .                       | 111 |



## 13 Supplemental Directives

### 13.1 Producer Information

### 13.2 Copyright

TRINAMIC owns the content of this user manual in its entirety, including but not limited to pictures, logos, trademarks, and resources. © Copyright 2019 TRINAMIC. All rights reserved. Electronically published by TRINAMIC, Germany.

Redistributions of source or derived format (for example, Portable Document Format or Hypertext Markup Language) must retain the above copyright notice, and the complete Datasheet User Manual documentation of this product including associated Application Notes; and a reference to other available product-related documentation.

### 13.3 Trademark Designations and Symbols

Trademark designations and symbols used in this documentation indicate that a product or feature is owned and registered as trademark and/or patent either by TRINAMIC or by other manufacturers, whose products are used or referred to in combination with TRINAMIC's products and TRINAMIC's product documentation.

This CANopen® Firmware Manual is a non-commercial publication that seeks to provide concise scientific and technical user information to the target user. Thus, trademark designations and symbols are only entered in the Short Spec of this document that introduces the product at a quick glance. The trademark designation /symbol is also entered when the product or feature name occurs for the first time in the document. All trademarks and brand names used are property of their respective owners.

### 13.4 Target User

The documentation provided here, is for programmers and engineers only, who are equipped with the necessary skills and have been trained to work with this type of product.

The Target User knows how to responsibly make use of this product without causing harm to himself or others, and without causing damage to systems or devices, in which the user incorporates the product.

### 13.5 Disclaimer: Life Support Systems

TRINAMIC Motion Control GmbH & Co. KG does not authorize or warrant any of its products for use in life support systems, without the specific written consent of TRINAMIC Motion Control GmbH & Co. KG.

Life support systems are equipment intended to support or sustain life, and whose failure to perform, when properly used in accordance with instructions provided, can be reasonably expected to result in personal injury or death.

Information given in this document is believed to be accurate and reliable. However, no responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. Specifications are subject to change without notice.

### 13.6 Disclaimer: Intended Use

The data specified in this user manual is intended solely for the purpose of product description. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose



or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given.

In particular, this also applies to the stated possible applications or areas of applications of the product. TRINAMIC products are not designed for and must not be used in connection with any applications where the failure of such products would reasonably be expected to result in significant personal injury or death (safety-Critical Applications) without TRINAMIC's specific written consent.

TRINAMIC products are not designed nor intended for use in military or aerospace applications or environments or in automotive applications unless specifically designated for such use by TRINAMIC. TRINAMIC conveys no patent, copyright, mask work right or other trade mark right to this product. TRINAMIC assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

### 13.7 Collateral Documents & Tools

This product documentation is related and/or associated with additional tool kits, firmware and other items, as provided on the product page at: [www.trinamic.com](http://www.trinamic.com).



## 14 Revision History

### 14.1 Firmware Revision

| Version | Date        | Author | Description                                                                                                                                                                                                                 |
|---------|-------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| V3.05   | 2010-NOV-13 | OK     | First release.                                                                                                                                                                                                              |
| V3.16   | 2013-APR-18 | OK     | Several new features: <ul style="list-style-type: none"> <li>• Save/restore parameters</li> <li>• Sensor selection code</li> <li>• pv mode</li> <li>• Boost current</li> <li>• Standby delay</li> <li>• CoolStep</li> </ul> |
| V3.20   | 2017-SEP-06 | OK     | Save/restore parameters fixed.                                                                                                                                                                                              |

Table 293: Firmware Revision

### 14.2 Document Revision

| Version | Date        | Author | Description                                   |
|---------|-------------|--------|-----------------------------------------------|
| V2.10   | 2019-JAN-04 | OK     | Completely revised.                           |
| V2.11   | 2019-NOV-13 | OK     | Superfluous object 6082 <sub>h</sub> removed. |

Table 294: Document Revision

