

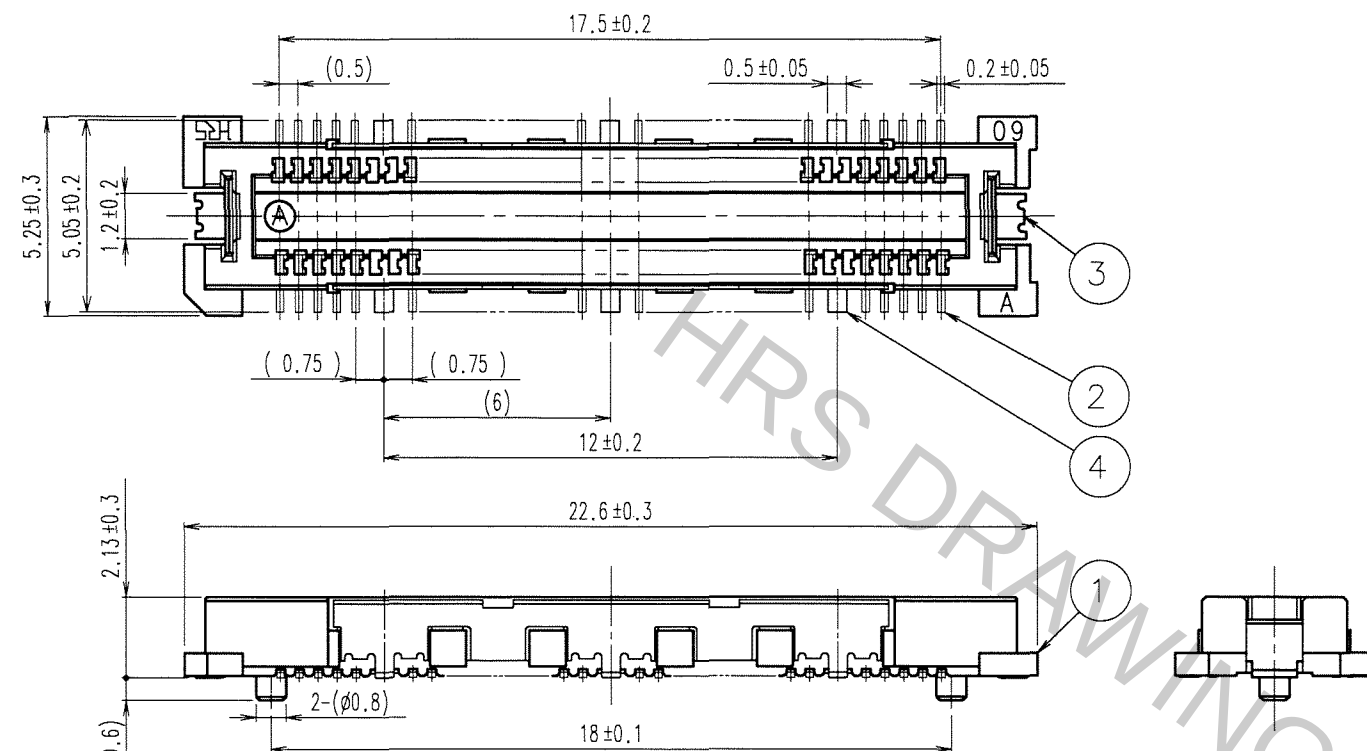
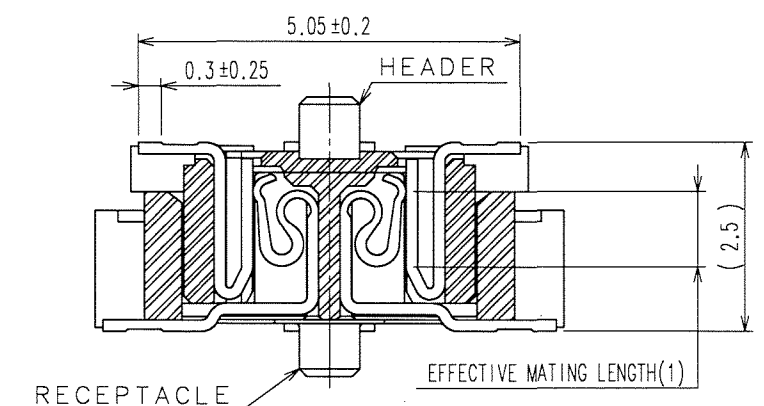



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .




RECOMMENDED LAND PATTERN DIMENSION OF PCB

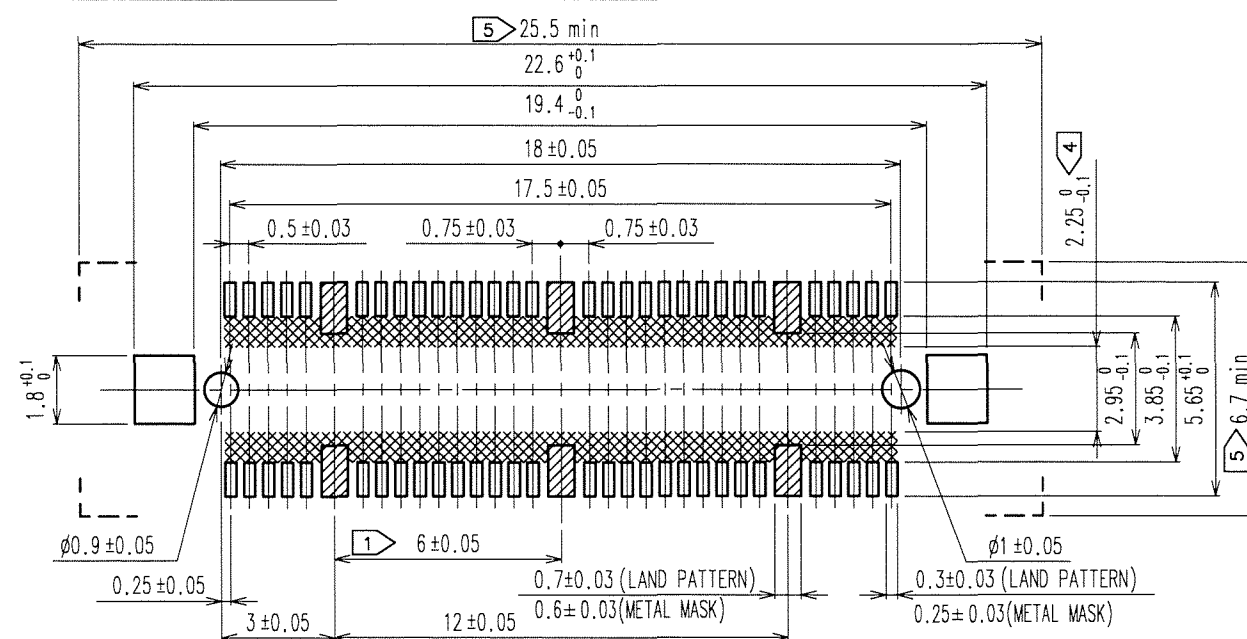

GROUND PORTION CROSS SECTION (10 : 1)

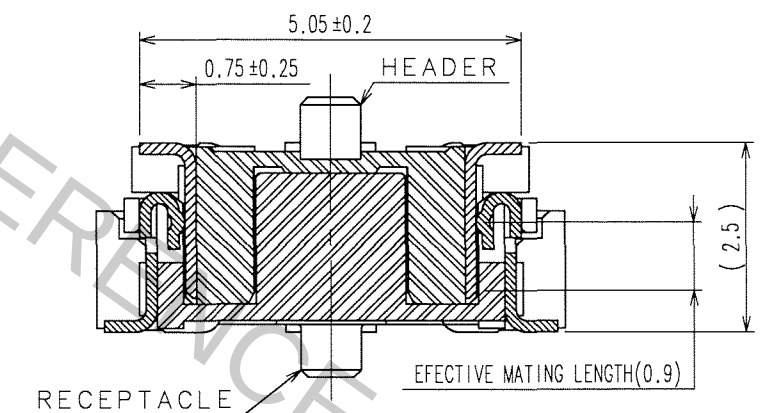

- NOTES ① 6 HATCHED  PARTS:GROUND CIRCUIT.
2 SMT LEAD-COPLANARITY:0.1 MAX.
3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR
LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
⑤ DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR
CANNOT BE MATED.
6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4			PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.						
1			LCP	BEIGE UL94V-0			LEAD AREA : GOLD FLASH						
							UNDER PLATING : NICKEL 1μm min.						
NO.		MATERIAL		FINISH, REMARKS		NO.	MATERIAL		FINISH, REMARKS				
CODE NO. (OLD)				DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
CL				A. SUZUKAWA '06.10.11		H. Nakamura '06.10.11		T. Ogawa '06.10.11		H. Okawa '06.10.11			
		DRAWING NO.				PART NO.							
SCALE		EDC3-152597-25				FX11A-60P/6-SV(71)							
5 : 1		 HIROSE ELECTRIC CO., LTD.				CODE NO.							1 1
UNITS						CL573-0502-0-71							
mm													