




	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

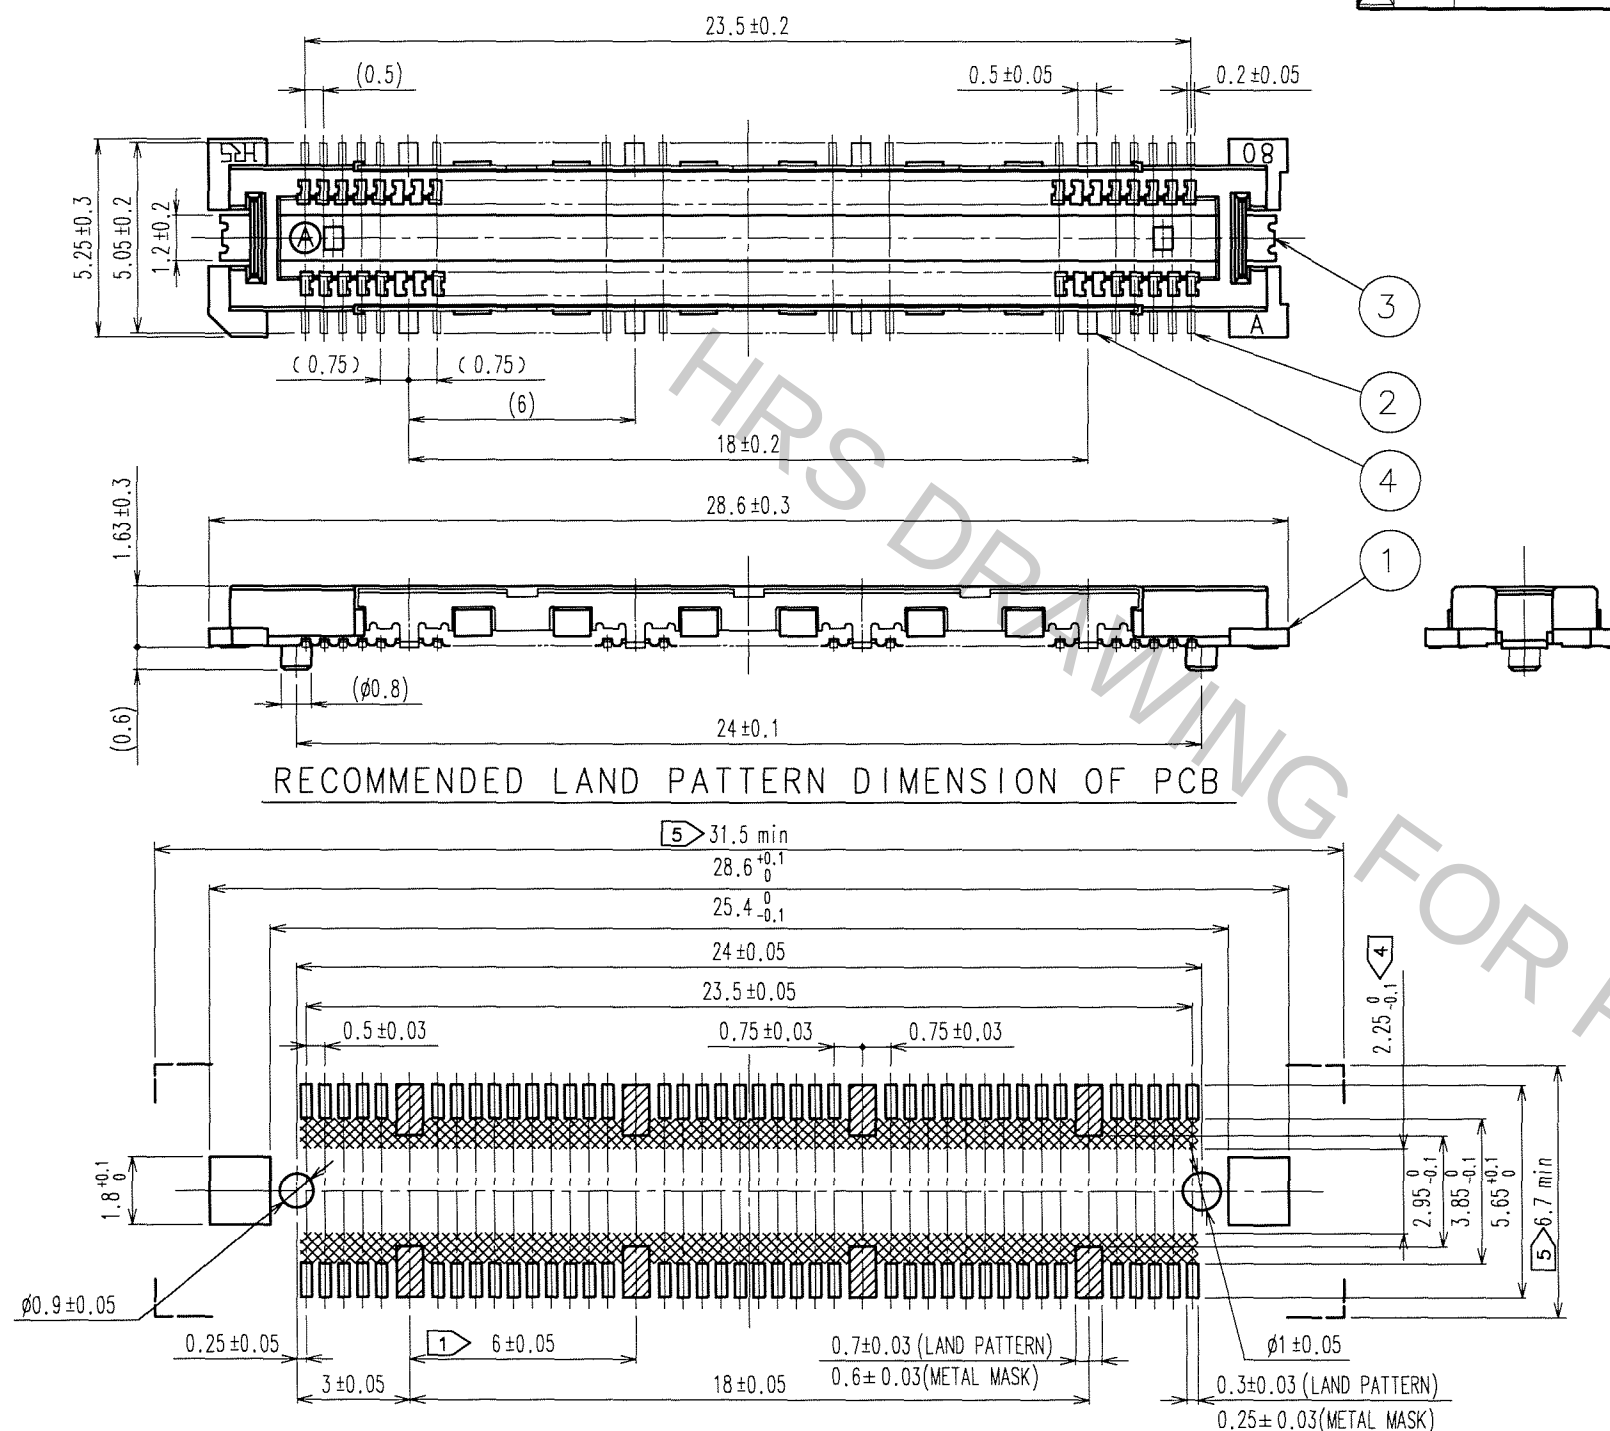


SIGNAL PORTION CROSS SECTION (10:1)

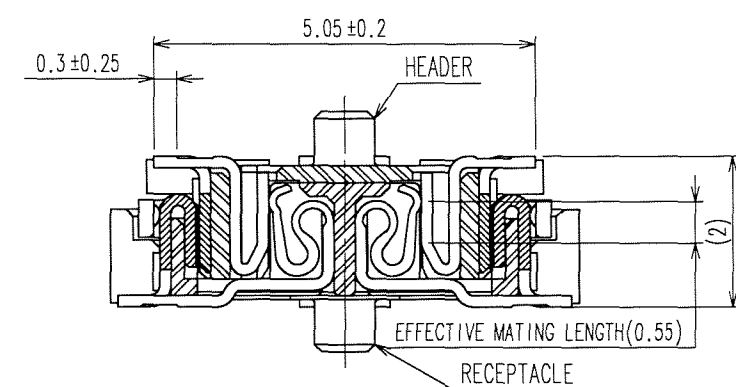

GROUND PORTION CROSS SECTION (10:1)

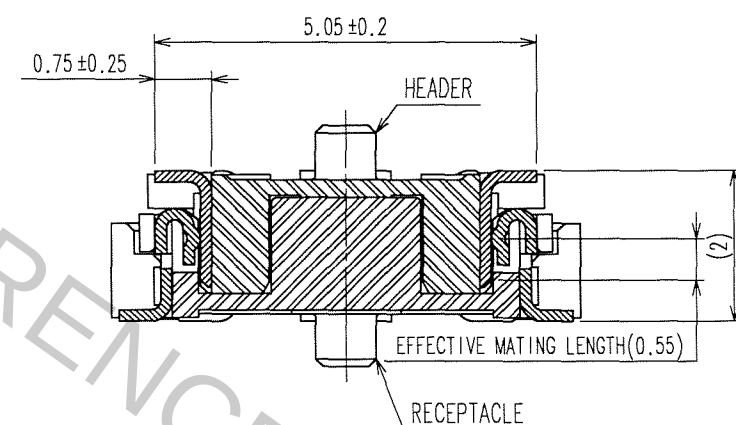

- NOTES
- 1 8 HATCHED  PARTS:GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY:0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm min.		
3	PHOSPHOR BRONZE	TIN-PLATING			LEAD AREA:GOLD FLASH		
1	LCP	BEIGE UL94V-0			UNDER PLATING:NICKEL 1μm min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO.(COLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			K.NAKAMURA 06.04.25	K.NAKAMURA 06.04.25	cl. Ozawa 06.04.25	H. Okawa 06.04.26	
		DRAWING NO. EDC3-152093-25		PART NO. FX11LA-80P/8-SV(71)			
SCALE 5 : 1		 HIROSE ELECTRIC CO.,LTD.		CODE NO. CL573-0003-0-71			1/1
UNITS mm							