

## General Description

The MAX38803 evaluation kit (EV kit) serves as a reference platform for evaluating the MAX38803 voltage regulator IC. This single-chip, integrated switching regulator provides an extremely compact, highly efficient, fast, accurate, and reliable power delivery solution for low-output voltage applications. The MAX38803 has different programmability options to enable a wide range of configurations.

The EV kit consists of a fully-assembled and tested Printed Circuit Board (PCB) implementation of the MAX38803. Jumpers, test points, and input/output connectors are included for flexibility and ease-of-use. Refer to the data sheet for ordering information and more details.

## Applications

- Servers/ $\mu$ Servers
- I/O and Chipset Supplies
- GPU Core Supply
- DDR Memory—VDDQ and VTT
- Point-of-Load (PoL) Applications

**Ordering Information** appears at end of data sheet.

## Features

- High-Efficiency Solution
  - Up to 97% Peak
  - Up to 87% at Full Load
  - Up to 96% Light Load Efficiency at 1A with DCM Enabled
- Inductor Valley Current Limit is Configured to 16A ( $R\_SEL = R1 = 6.04k\Omega$ )
- Programmable Switching Frequency from 400kHz to 900kHz
- Programmable Positive and Negative OCP Limit
- Programmable Reference Voltage with External Input Option
- Fast Transient Response with Quick PWM™ Architecture
- Differential Remote Sense with Open-Circuit Detection
- Percentage-Based Output Power Good and OVP
- Open-Drain Status Indicator (STAT) Pin
- Input Undervoltage and Overvoltage Lockout
- Adaptive Dead Time Control
- Integrated Boost Switch
- 27-Bump WLCSP (2.2mm x 3.8mm) Footprint
- Operation Using Ceramic Input and Output Capacitors

Quick PWM is a trademark of Maxim Integrated Products, Inc.

## Quick Start

### Required Equipment

- MAX38803 EV kit
- 12V, 10A DC power supply
- Load capable of sinking 16A
- Digital voltmeter
- Oscilloscope

### Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify the board operation. **Caution: Do not turn on power supply until all connections are completed.**

- 1) Connect a 12V power supply to the VDD1 and GND1 banana jacks.
- 2) Make sure the shunt is installed on:
  - a) J16 (1-2) to close the sense line.
  - b) J4 (1-2) to power up the on-board LDO which regulates 1.8V.
  - c) J12 (1-2) to provide the 1.8V bias supply to the regulator from the on-board LDO.
  - d) J15 (3-5) to pull up the STAT pin.
  - e) J15 (4-6) to pull up the OE pin.
- 3) Connect a voltmeter to the VOUT and GND banana jacks (J8, J11, J13, and J14 can be used as well).
- 4) Turn on the power supply.
- 5) Verify that the voltmeter reads 2.5V.

## Detailed Description of Hardware

The MAX38803 provides compact, high-efficiency power delivery for precision outputs that demand fast transient response. The 27-bump (2.2mm x 3.8mm) WLCSP package minimizes the printed circuit board area. The EV kit is preset for 2.5V output and can provide up to 16A from a 6.5V to 14V input supply.

### Bias Supply

The MAX38803 EV kit has an on-board LDO (U2) that can provide the required 1.8V VCC bias voltage to the regulator as well as the pull up voltage for the Output Enable (OE) input. This allows testing the part using a single external power supply.

To enable the on-board LDO install the shunt on jumper J4. To effectively use the LDO to supply the VCC bias voltage to the regulator also install the shunt on jumper J12.

In order to properly measure the efficiency of the regulator, the LDO should not be active. To disable the LDO, both the shunts on J4 and J12 need to be removed. An

external 1.8V, 0.1A current limited power supply needs to be connected between J12-2 and ground. The same signal should be connected to J10 (1-2) to pull up the OE pin.

### Regulator Enable

To enable the regulator, the OE pin needs to be pulled high. If the on-board 1.8V LDO is active (the shunt on jumper J4 is in place), the output voltage can be used for the purpose. Installing a shunt on J15 (4-6) pulls the OE signal high to 1.8V through a 20k $\Omega$  resistor. To shut down the regulator, a shunt needs to be installed on J10. This forces the OE pin low.

### Status Pin

The MAX38803 has an open collector status (STAT) output to report fault or output undervoltage event. Install a shunt on J15 (3-5) to pull up this pin to V<sub>CC</sub> through a 20k $\Omega$  resistor. Since STAT pin is 3.3V tolerant, a shunt on J15 (1-3) can be installed to pull up this pin through a 20k $\Omega$  resistor to the 3.3V provided by the on board regulator U3 (install a shunt on J5 (3-4) to enable the LDO).

### Scenario Selection

Several parameters of the MAX38803 can be programmed to allow optimization for specific applications. By selecting the appropriate value of resistor R\_SEL (R1) and capacitor C\_SEL (C4), the optimum set of parameters (scenario) can be programmed.

While R\_SEL selects the proper scenario, C\_SEL determines the nominal F<sub>SW</sub>. [Table 1](#) shows the configuration table for MAX38803.

### Setting the Output Voltage

The output voltage of the MAX38803 depends both on the reference voltage ( $V_{REF}$ ) and the resistor divider ratio.

#### Equation 1

$$V_{OUT} = V_{REF} \times \left(1 + \frac{R_6}{R_9}\right)$$

The reference voltage is selected through RSEL (see [Table 1](#)) and can be either internal or external (refer to the data sheet for more details). In order to optimize the common mode rejection of the error amplifier, choose the voltage divider resistors so that their parallel resistance  $R_{PAR}$  is as close as possible to  $2k\Omega$ .

#### Equation 2

$$R_6 = V_{OUT} \times \left(\frac{R_{PAR}}{V_{REF}}\right)$$

$$R_9 = R_6 \times \left(\frac{R_{PAR}}{R_6 - R_{PAR}}\right)$$

where,

$R_6$  = Top divider resistor

$R_9$  = Bottom divider resistor

$R_{PAR}$  = Desired parallel resistance of  $R_6$  and  $R_9$

$V_{OUT}$  = Output voltage

$V_{REF}$  = Reference voltage

### Operation with External $V_{REF}$

When using an external reference adopt the configuration shown in [Figure 1](#). Once OE is asserted, the regulator briefly discharges the SENSE- node and releases it as regulation begins. In this case, the soft-start ramp is determined by the external low-pass filter time constant. The external filter time constant needs to be lower than  $T_{SS}/3$  in order to avoid premature assertion of STAT pin while the output voltage is still ramping.

The external reference voltage can be applied prior to enabling the regulator, or ramped up right after enable is asserted. In both cases, the low-pass filtered reference voltage at SENSE- pin must reach its final value within  $T_{SS}$ .

Typical values for the filter components are:

- $R_F = 2.2k\Omega$
- $C_F = 0.22\mu F$

**Table 1. MAX38803 Configuration Table**

R_SEL (kΩ)	V_REF (V)	SOFT-START TIME (T <sub>SS</sub> ) (ms)	VALLEY OCP INCEPTION (A)	OPERATION MODES	REPORTING (CURRENT/TEMP)	RSENSE (GAIN) (mΩ)	F <sub>sw</sub> (kHz)			T <sub>STAT</sub> (μs)
							C_SEL			
							0pF	200pF	820pF	
1.78	0.95	1.5	16	CCM	Current	2.8	700	800	900	2000
2.67				CCM/DCM						
4.02				CCM						
6.04				CCM/DCM						
9.09	Ext.	3	24	CCM	Temp	5.4	400	500	600	128
13.3				CCM/DCM						
20.0	0.6		16	CCM						
30.9				CCM/DCM						
46.4				CCM						
71.5				CCM/DCM						
107	Ext.	1.5	20	CCM	1.4	400	500	600	128	
162				CCM						

**Input Voltage Monitoring**

VDD1 and GND1 sense points as well as J3 can be used to monitor the input supply.

**Output Voltage Monitoring**

J11 and J13 monitor the output voltage. These test points should not be used for loading. Use scopejack J14 to monitor the output voltage ripple on an oscilloscope.

**Efficiency Measurement**

The following steps describe how to measure the regulator efficiency.

- 1) Connect a 12V power supply to the VDD1 and GND1 banana jacks. To avoid the input voltage to drop at high load due to power losses on connection cables connect the sense lines of the power supply to VDD1 and GND1 headers.
- 2) Connect an external 1.8V, 0.1A current limited power supply between J12-2 and ground
- 3) Connect the same power supply to J10-1 to enable the regulator.

- 4) Connect a load to the VOUT and GND banana jacks for better results. J8 can also be used for low currents.
- 5) Make sure the shunt is installed on J16 (1-2) to close the sense line.
- 6) Remove all the other jumpers.
- 7) Connect a voltmeter to J11 or J13.
- 8) Turn on the power supply.
- 9) Measure  $V_{IN}$ ,  $I_{IN}$ ,  $V_{OUT}$ ,  $I_{OUT}$ ,  $V_{BIAS}$ , and  $I_{BIAS}$ .
- 10) Calculate the efficiency as:

**Equation 3**

$$\eta = \left( \frac{V_{OUT} \times I_{OUT}}{(V_{IN} \times I_{IN}) + (V_{BIAS} \times I_{BIAS})} \right)$$

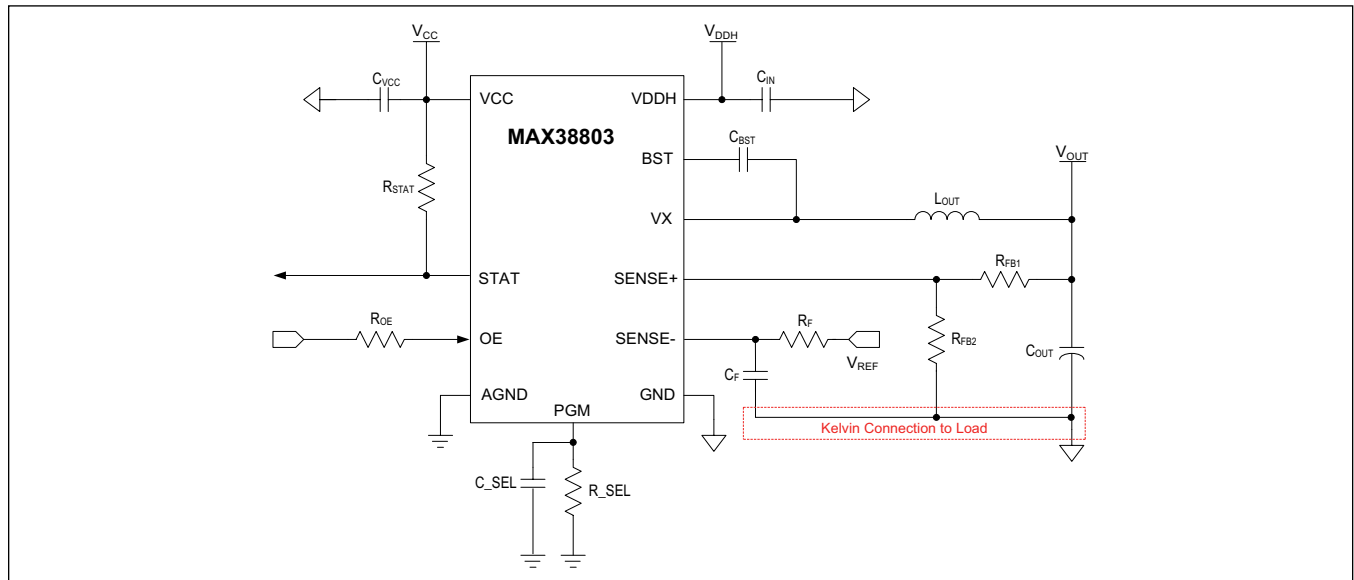


Figure 1. Electrical Connections to Use the External Voltage Reference Feature

MAX38803 EV Kit Bill of Materials

ITEM	REF DES	DNI/DNP	QTY	MFG PART #	MFG	VALUE	DESCRIPTION	COMMENTS
1	C1, C2	-	2	TPSE157M016R0100	AVX	150UF	CAPACITOR; SMT; 7343; TANTALUM; 150uF; 16V; 20%; TPS; -55degC to +125degC	
2	C3	-	1	C0402X7R160-104KNE; LTD./SAMSUNG CL05B104K05NNNC; GRM155R71C104KA88; C1005X7R1C104K; CC0402KRX7R7BB104; EMK105B7104KV	VENKEL LTD./SAMSUNG ELECTRONICS/MURATA TAI/TKYAGEO PHICOMP/TAIYO YUDEN	0.1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1UF; 16V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R;	
3	C4	-	1	ECJ-0EB1E821K	PANASONIC	820PF	CAPACITOR; SMT (0402); CERAMIC CHIP; 820PF; 25V; TOL=10%; MODEL=ECJ SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R	
4	C5, C6, C10, C11	-	4	C3216X7R1C106M160AC	TDK	10UF	CAPACITOR; SMT (1206); CERAMIC CHIP; 10UF; 16V; TOL=20%; MODEL=C SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R	
5	C7, C21, C54	-	3	EMK107B7105MA	TAIYO YUDEN	1UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 1UF; 16V; TOL=20%; MODEL=M SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R	
6	C8	-	1	GRM188R71E474KA12	MURATA	0.47UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 0.47UF; 25V; TOL=10%; MODEL=GRM SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R	
7	C9, C55	-	2	JMK105BBJ475M1V; C1005X5R0J475M050BC	TAIYO YUDEN; TDK	4.7UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 4.7UF; 6.3V; TOL=20%; TG=-55 DEGC TO +85 DEGC; TC=X5R	
8	C13-C15, C17, C18	-	5	C2012X6S0J226M125AB; GR M21BC80J	TDK/MURATA	22UF	CAPACITOR; SMT (0805); CERAMIC CHIP; 22UF; 6.3V; TOL=20%; TG=-55 DEGC TO +105 DEGC; TC=X6S	
9	C22, C41, C46, C50	-	4	CL21A476MOYNNNE; C2012X5R0J476M125AC; JMK212BJ476MG	SAMSUNG ELECTRONICS/TAIYO YUDEN	47UF	CAPACITOR; SMT (0805); CERAMIC CHIP; 47UF; 6.3V; TOL=20%; TG=-55 DEGC TO +85 DEGC; TC=X5R	
10	C24	-	1	GRM155R71E103KA01D; C1005X7R1E103K C0402X7R250-	KEMET; MURATA; TDK	0.01UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.01UF; 25V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R;	
11	C25, C56	-	2	153KNE; GRM155R71E153K C0402X5R6K3105KNP;	VENKEL LTD./MURATA	0.015UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.015UF; 25V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R	
12	C36	-	1	C1005X5R0J105K; GRM155R60J105KE19; JMK105BJ105KV	VENKEL LTD./TKMURATA	1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 1UF; 6.3V; TOL=10%; TG=-55 DEGC TO +85 DEGC; TC=X5R;	
13	C37	-	1	TMK105BJ682KVH	TAIYO YUDEN	6800PF	CAPACITOR; SMT (0402); CERAMIC CHIP; 6800PF; 25V; TOL=10%; TG=-55 DEGC TO +85 DEGC; TC=X5R; AUTO	
14	C38	-	1	GRM155R71H153KA12	MURATA	0.015UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.015UF; 50V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R	
15	C39	-	1	C0402C22K3RAC	KEMET	2200PF	CAPACITOR; SMT; 0402; CERAMIC; 2200pf; 25V; 10%; X7R; -55degC to +125degC; 0 +/- 15% degC MAX.	

MAX38803 EV Kit Bill of Materials (continued)


ITEM	REF_DES	DNI/DNP	QTY	MFG PART #	MFG	VALUE	DESCRIPTION	COMMENTS
16	D1	-	1	2EZ15D5	MICRO COMMERCIAL COMPONENTS	15V	DIODE; ZNR; THROUGH HOLE-AXIAL LEAD (DO-41); VZ=15V; IZ=0.122A	
17	GND1_TP1-TP3_VDD1_VOUT	-	6	108-0740-001	EMERSON NETWORK POWER	108-0740-001	CONNECTOR; MALE; PANELMOUNT; BANANA JACK; STRAIGHT; 1PIN	
18	GND1_HEADER_GND2_J9_VDD1_HEADER_VX1	-	5	PEC01SAAN	SULLINS ELECTRONICS CORP	PEC01SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 4PIN	
19	GND1_MAXIMPAD_VDD1_MAXIMPAD_VOUT_MAXIMPAD	-	6	MAXIMPAD	N/A	MAXIMPAD	EVK KIT PARTS; MAXIM PAD; NO WIRE TO BE SOLDERED ON THE MAXIMPAD	
20	J1_J4_J10-J13_J16	-	7	PEC02SAAN	SULLINS	PEC02SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 2PINS	
21	J3_J14	-	2	SCOPE_PROBE_JACK	MAXIM	SCOPE_PROBE JACK	EVKIT PART-SCOPE PROBE JACK	
22	J5_J15	-	2	PEC03DAAN	SULLINS ELECTRONICS CORP.	PEC03DAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT THROUGH; 6PINS; 65 DEGC TO +125 DEGC	
23	J7	-	1	PEC04SAAN	SULLINS ELECTRONICS CORP.	PEC04SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 4PINS	
24	J8	-	1	ED120/2DS	ON-SHORE TECHNOLOGY INC.	ED120/2DS	CONNECTOR; FEMALE; THROUGH HOLE; BLUE TERMINAL BLOCK; STRAIGHT; 2PINS	
25	L1	-	1	744373680068	WURTH ELECTRONICS INC	0.68UH	INDUCTOR; SMT; SHIELDED; 0.68UH; TOL=+/-20%; 16A	
26	R1	-	1	1ERJ2RKF6041	PANASONIC	6.04K	RESISTOR; 0402; 6.04K OHM; 1%; 100PPM; 0.1W; THICK FILM	
27	R2_R3	-	2	CRG0402F10K	TE CONNECTIVITY YAGEO	10K	RESISTOR; 0402; 10K OHM; 1%; 100PPM; 0.063W; THICK FILM	
28	R4_R7_R11_R15_R16	-	5	RC0402JR-070RL; CR0402-16W-000RJT	PHYCOMP/VENKEL LTD.		RESISTOR; 0402; 0 OHM; 5%; JUMPER; 0.063W; THICK FILM	
29	R5_R8	-	2	1ERJ-2GEJ203X	PANASONIC	20K	RESISTOR; 0402; 20K OHM; 5%; 200PPM; 0.10W; THICK FILM	
30	R6	-	1	CRCW04024K32FK	VISHAY DALE	4.32K	RESISTOR; 0402; 4.32K OHM; 1%; 100PPM; 0.063W; THICK FILM	
31	R9	-	1	1ERJ-2RKF2611	PANASONIC	2.61K	RESISTOR; 0402; 2.61K OHM; 1%; 100PPM; 0.1W; THICK FILM	
32	R10	-	1	CRCW04021K00JK	VISHAY DALE	1K	RESISTOR; 0402; 1K OHM; 5%; 100PPM; 0.063W; METAL FILM	
33	R12	-	1	CR0402-16W-9091FT; CRCW04029K0	VENKEL LTD./VISHAY DALE/PANASONIC	9.09K	RESISTOR; 0402; 9.09K OHM; 1%; 100PPM; 0.063W; THICK FILM	
34	R13	-	1	CRCW04022K10FK	VISHAY DALE INTERNATIONAL MANUFACTURING SERVICE	2.1K	RESISTOR; 0402; 2.1K; 1%; 100PPM; 0.0625W; THICK FILM	
35	R14	-	1	RCC-0402PW200RF		200	RESISTOR; 0402; 200 OHM; 1%; 100PPM; 0.080W; THICK FILM	
36	SU1-SU5	-	5	STC02SYAN	SULLINS ELECTRONICS CORP.	STC02SYAN	TEST POINT; JUMPER; STR; TOTAL LENGTH=0.286IN; BLACK; INSULATION=PBT CONTACT=PHOSPHOR BRONZE; COPPER PLATED TIN OVERALL	

MAX38803 EV Kit Bill of Materials (continued)

ITEM	REF_DES	DNI/DNP	QTY	MFG PART #	MFG	VALUE	DESCRIPTION	COMMENTS
37	U1	-	1	MAX38803HC,J+	MAXIM	MAX38803HC J+	EVKIT PART - IC; VREG; INTEGRATED; STEP-DOWN SWITCHING REGULATOR; CSP27	
38	U2	-	1	LP2992AIM5-1.8/NOPB	TEXAS INSTRUMENTS	LP2992AIM5-1.8/NOPB	IC; VREG; MICROPOWER 250-mA LOW-NOISE ULTRALOW-DROPOUT REGULATOR DESIGNED FOR USE WITH VERY LOW-ESR OUTPUT CAPACITOR; SOT23-5	
39	U3	-	1	LP2992AIM5-3.3/NOPB	TEXAS INSTRUMENTS	LP2992AIM5-3.3/NOPB	IC; VREG; MICROPOWER 250-mA LOW-NOISE ULTRALOW-DROPOUT REGULATOR DESIGNED FOR USE WITH VERY LOW-ESR OUTPUT CAPACITOR; SOT23-5	
40	PCB	-	1	MAX38803	MAXIM	PCB	PCB:MAX38803	
41	C12, C16, C19, C20, C26, C27, C30, C33, C34, C40, C42-C45, C47-C49, C52, C53	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 0805 NON-POLAR CAPACITOR	
42	C28, C29	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 7343 HEIGHT 4.3MM ELECTROLYTIC CAPACITOR	
43	C51, C57	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 0402 NON-POLAR CAPACITOR	
44	R7	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 0402 RESISTOR	
45	L1	DNP	0	MMD-10DZ-R68M-X2	MAG. LAYERS	0.68UH	INDUCTOR; SMT; MAGNETICALLY SHIELDED; 0.68UH; TOL=+/-20%; 22A	(Alternate part for L1)
TOTAL			87					


NOTE: DNI--> DO NOT INSTALL(PACKOUT); DNP--> DO NOT PROCURE

MAX38803 EV Kit Schematic

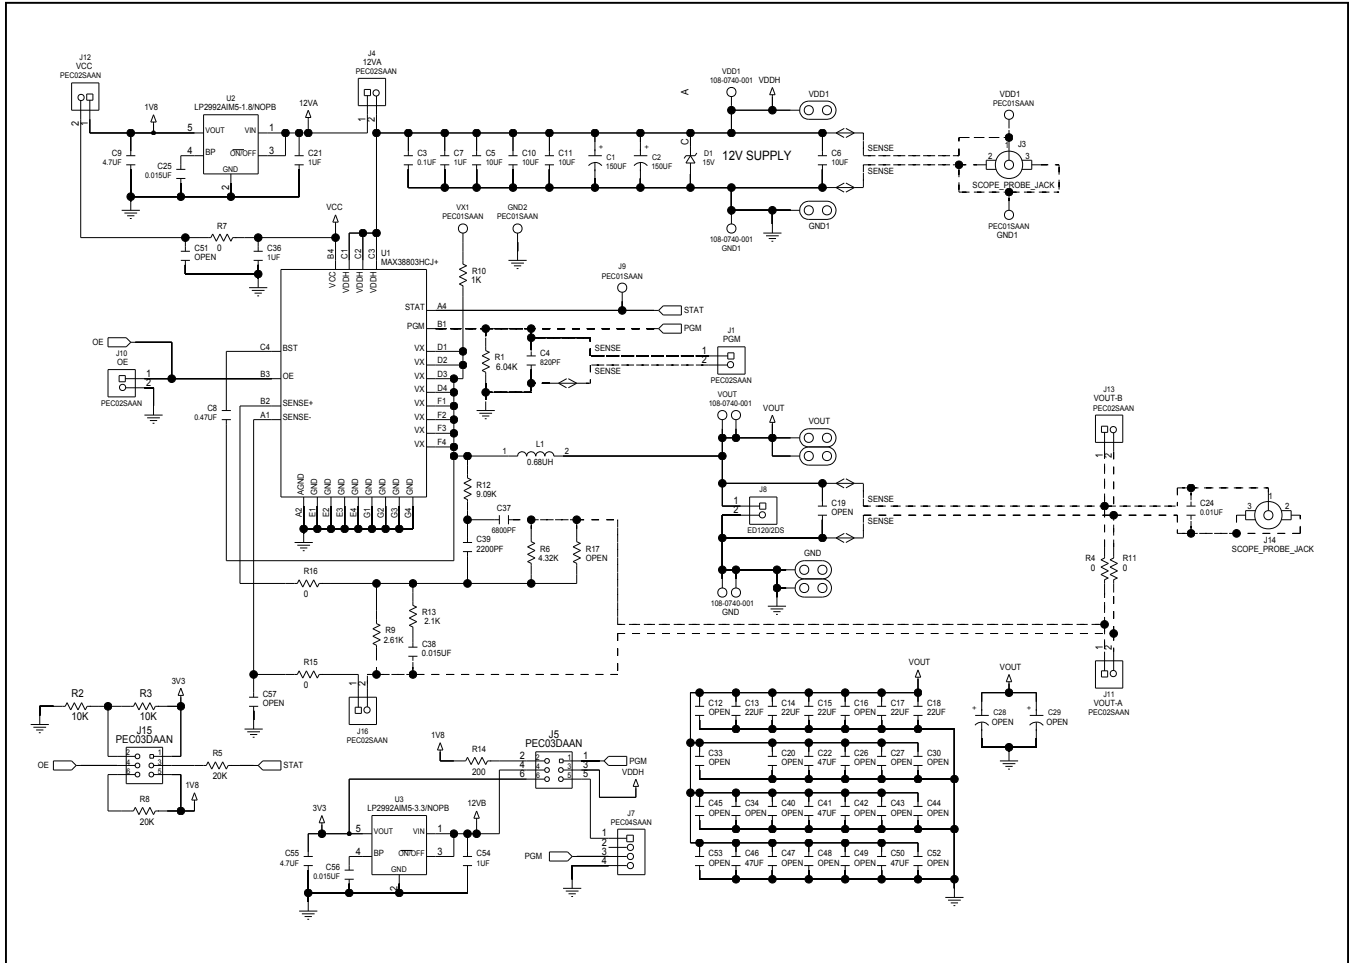





MAX38803 EV Kit PCB Layout Diagrams

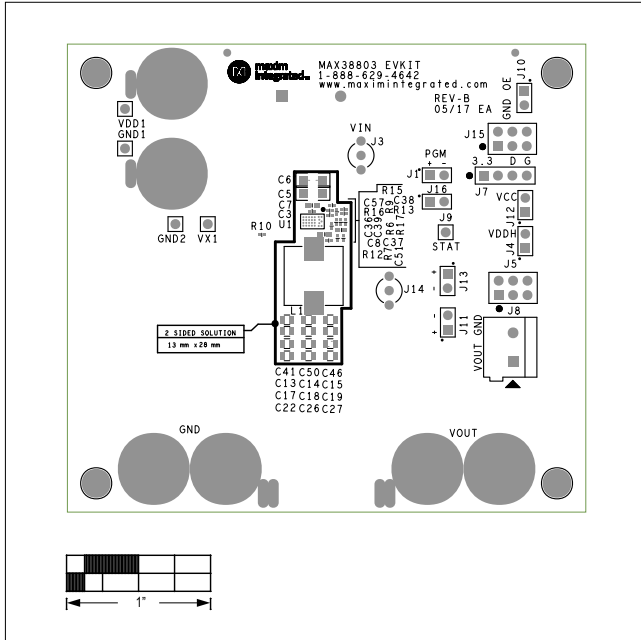


MAX38803 EV Kit—Top Silkscreen

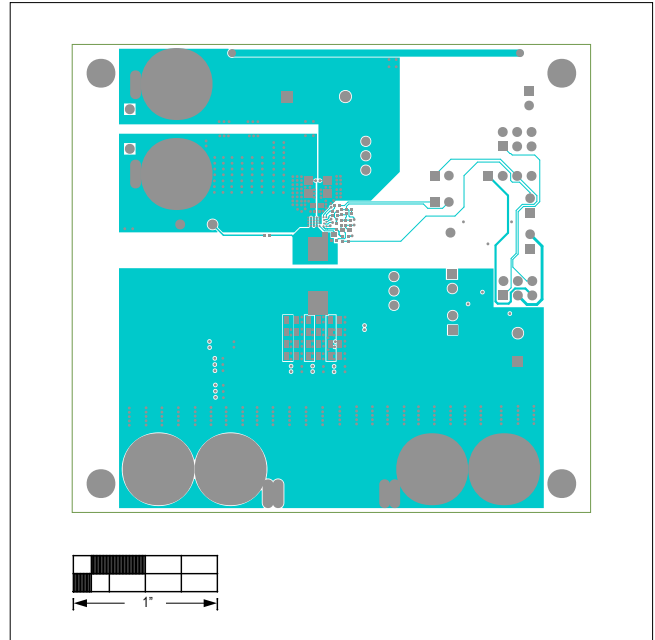

MAX38803 EV Kit—Top

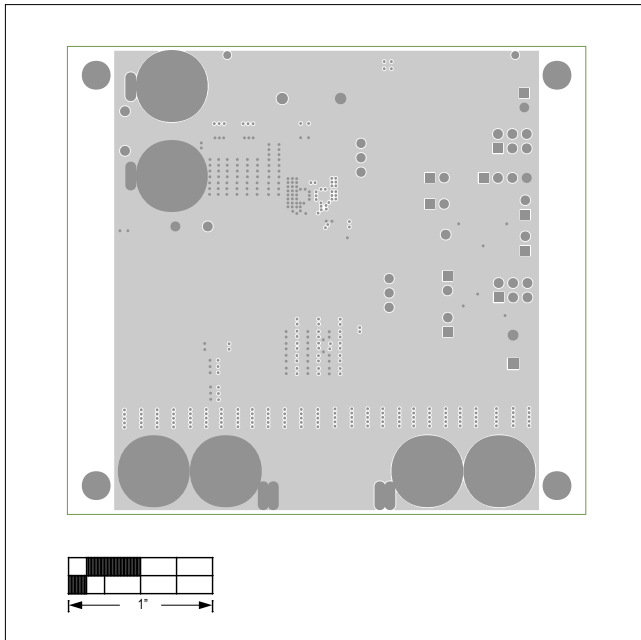

MAX38803 EV Kit—Internal 2

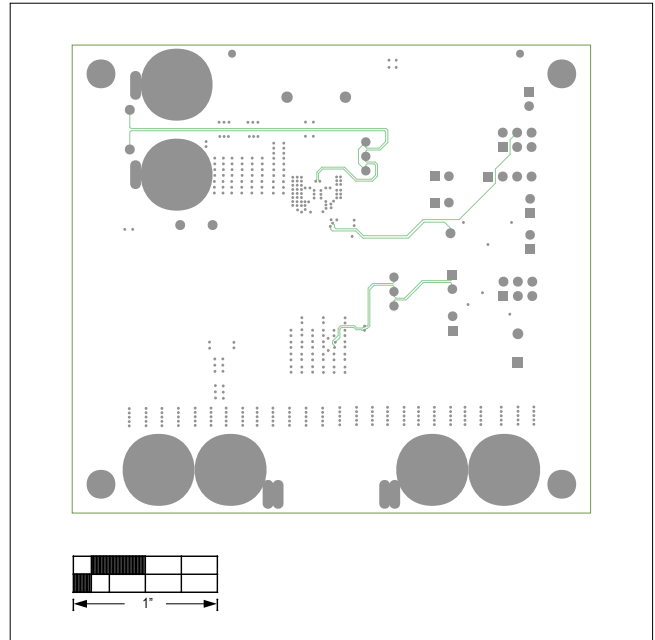

MAX38803 EV Kit—Internal 3



### Ordering Information

PART	TYPE
MAX38803EVKIT#	EV Kit

*#Denotes an RoHS-compliant device*

## Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	8/17	Initial release	—
1	5/18	Updated <i>Bill of Materials</i>	5–7

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*