
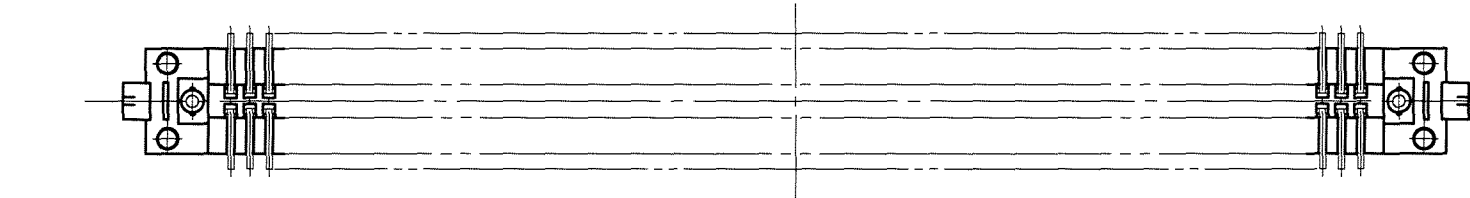
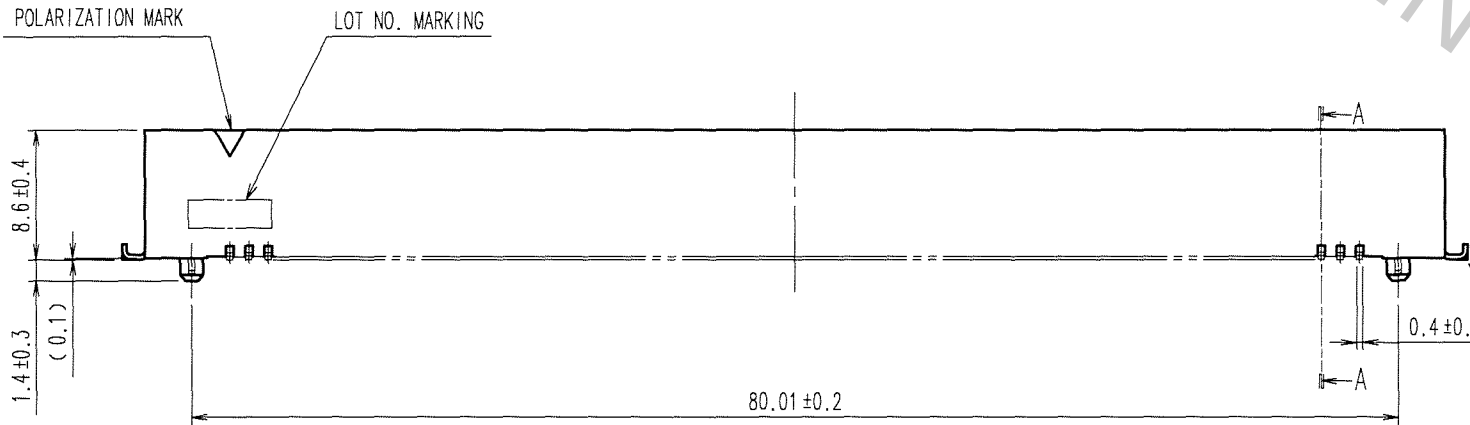




Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

TO
PCK


5							6							7							8						
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△							.	△								.							.				
△							.	△								.							.				
△							.	△								.							.				

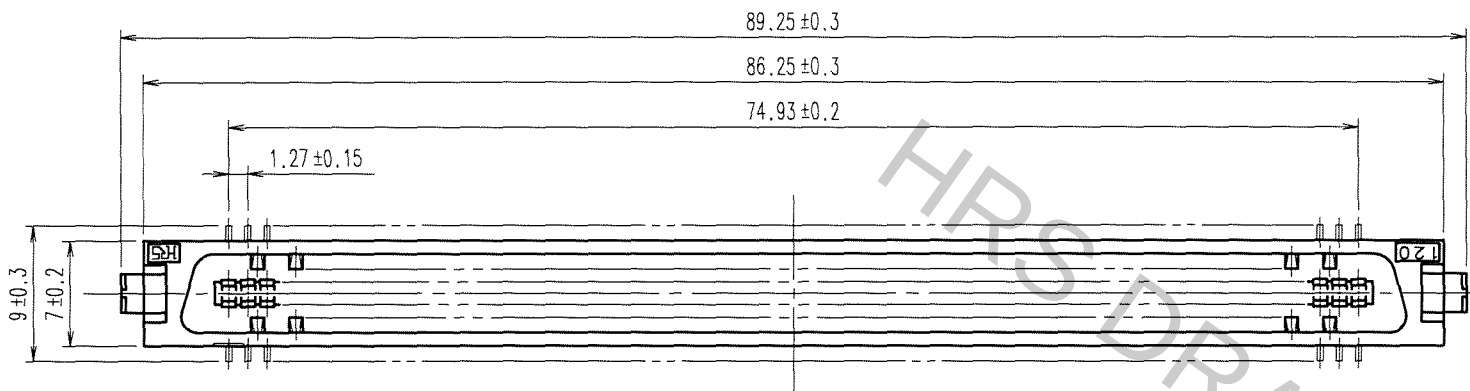

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

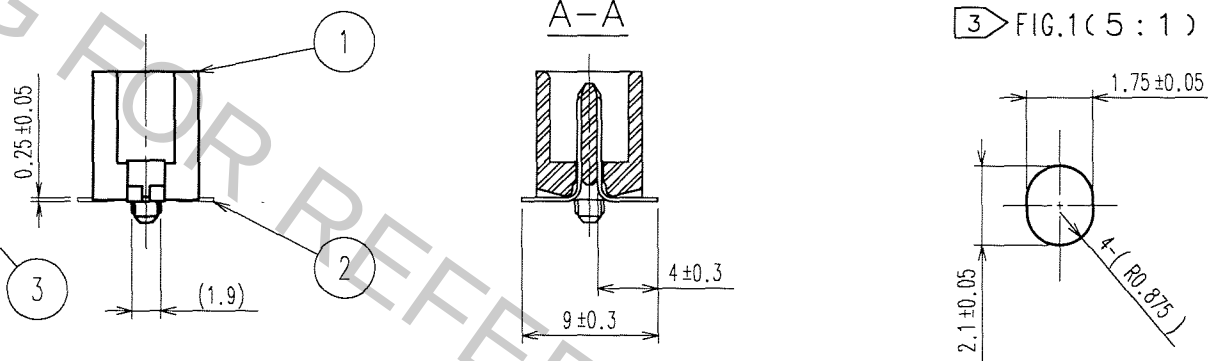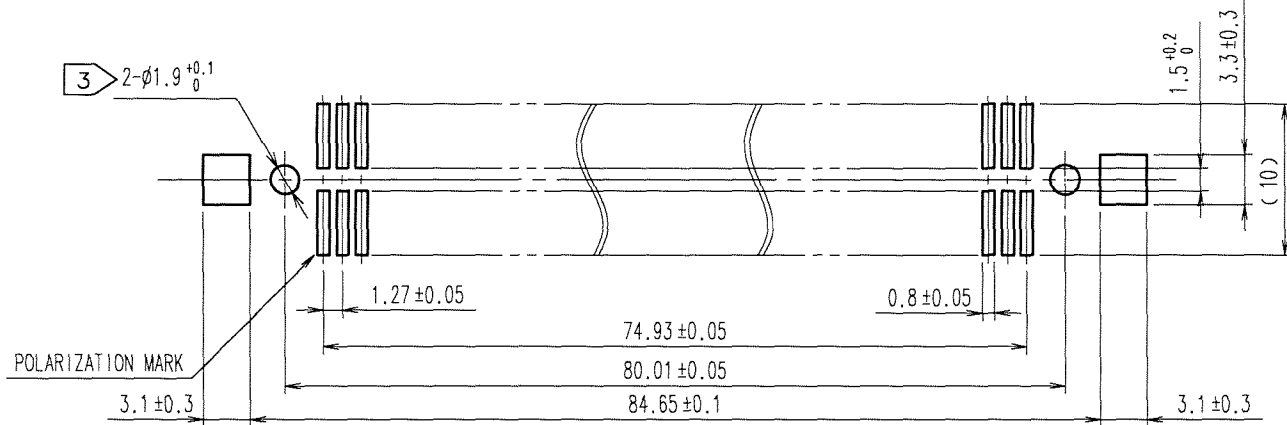

- NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

3			BRASS	TIN-PLATING		2	PHOSPHOR BRONZE		CONTACT AREA:GOLD 0.2μ m min.		
1			PPS	LIGHT BROWN (UL94V-0)					LEAD AREA:TIN-PLATING 2μ m min.		
									UNDER PLATING:NICKEL 2μ m min.		
NO.		MATERIAL		FINISH, REMARKS		NO.		MATERIAL		FINISH, REMARKS	
CODE NO. (OLD) CL						DRAWN A.SUZUKAWA 06.03.07		DESIGNED H.Nakamura 06.03.07		CHECKED H.Ogawa 06.03.07	
								APPROVED H.Okawa 06.03.07		RELEASED . .	
		DRAWING NO. EDC3-082413-21				PART NO. FX2-120P-1.27SVL(71)					
SCALE 2 : 1											
UNITS mm		 HIROSE ELECTRIC CO., LTD				CODE NO. CL572-2059-9-71		1/1			