

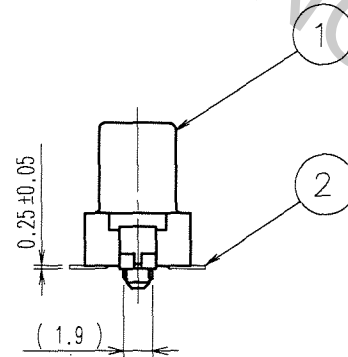
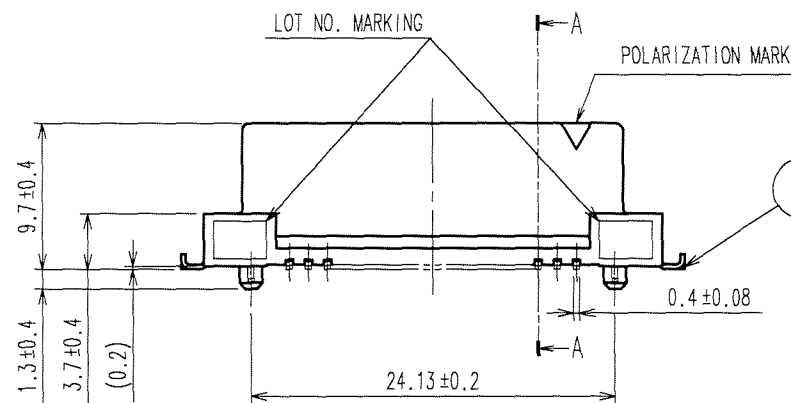
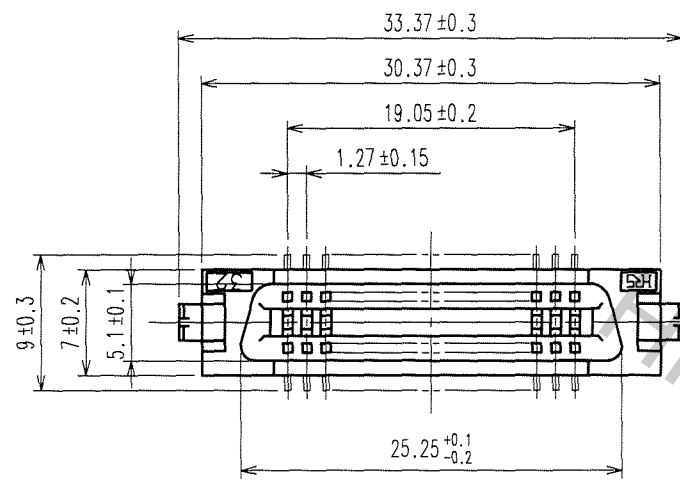


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

TO
PCK

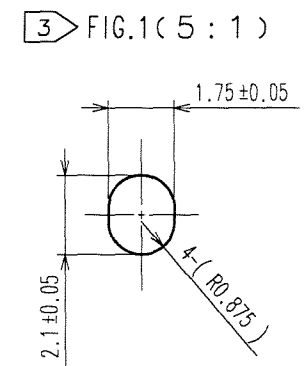

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

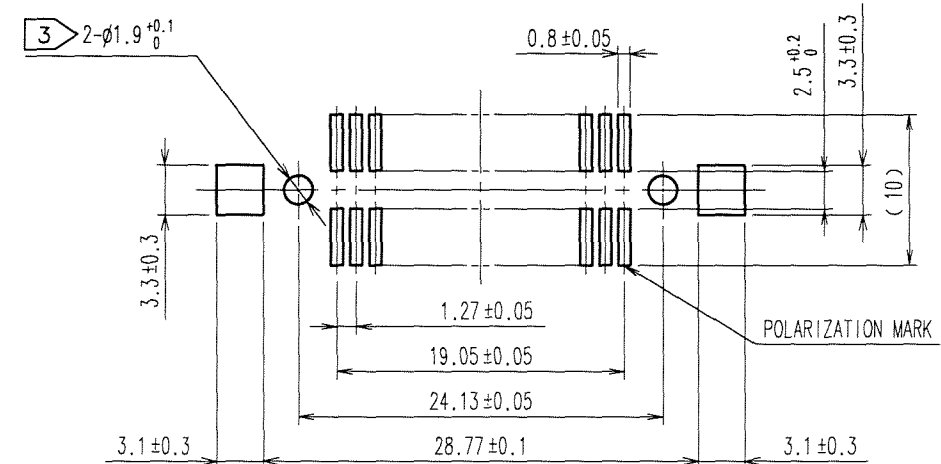

- NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

			3	BRASS	TIN-PLATING		
			2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μ m min.		
					LEAD AREA:TIN-PLATING 2μ m min.		
					UNDER PLATING:NICKEL 1.5μ m min.		
1	PPS	LIGHT BROWN (UL94V-0)	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED		
			A.SUZUKAWA	<i>d. Nakamura</i>	<i>X. Ogawa</i>		
			06.07.19	06.07.19	06.07.19		
DRAWING NO. EDC3-082758-21			PART NO. FX2-32S-1.27SVL (71)				
SCALE 2 : 1			CODE NO. CL572-2152-4-71				
UNITS mm			1 / 1				
HRS HIROSE ELECTRIC CO., LTD							