

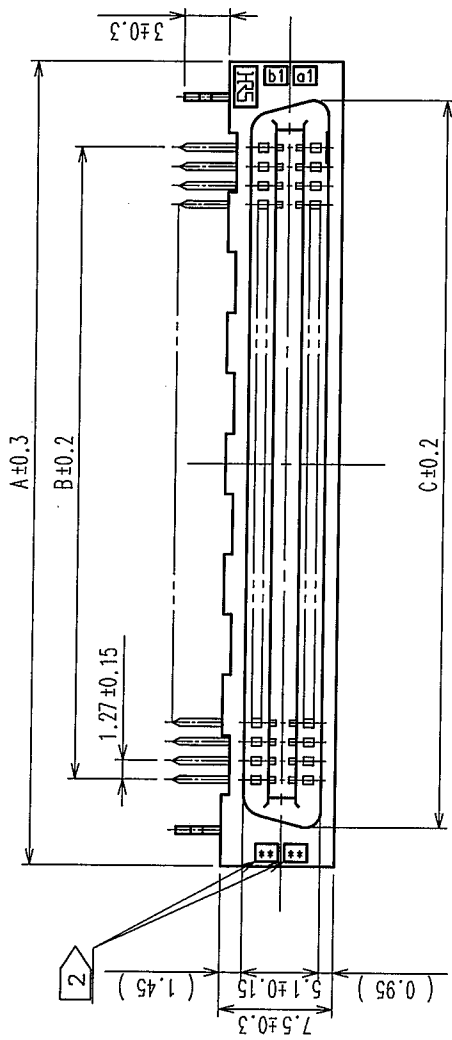


In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

DESCRIPTION OF REVISIONS			COUNT		DESCRIPTION OF REVISIONS		BY		DATE	
△	△	△	△	△	△	△	△	△	△	△
△	△	△	△	△	△	△	△	△	△	△
△	△	△	△	△	△	△	△	△	△	△
△	△	△	△	△	△	△	△	△	△	△


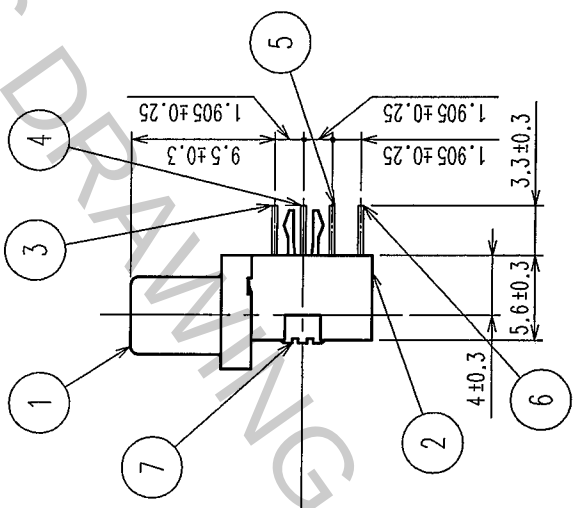


MATING SIDE

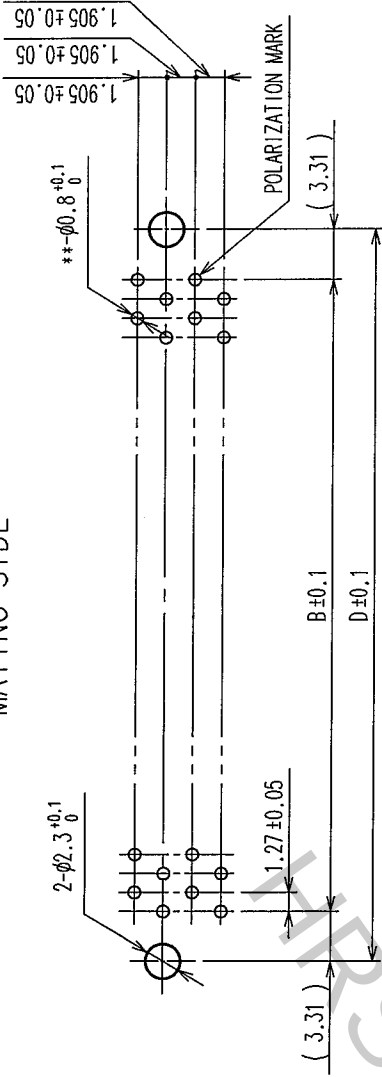

RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)

t=1.6

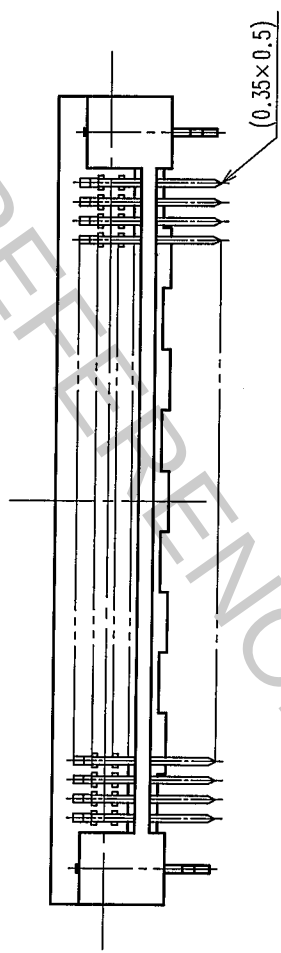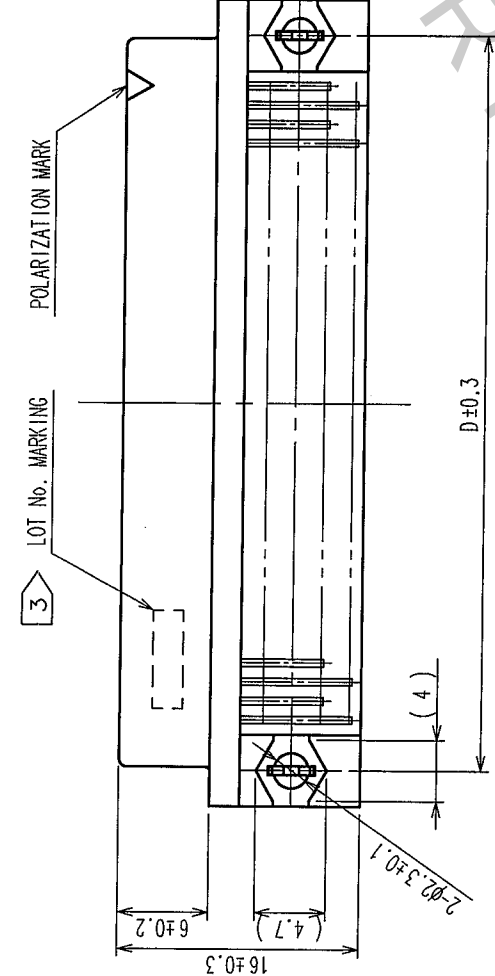

HRS No.	PART No.	1	A	B	C	D	2
CL572-2751-9-71	FX2-20S-1.27DSL(71)	20	22.75	11.43	17.63	18.05	10
CL572-2752-1-71	FX2-32S-1.27DSL(71)	32	30.37	19.05	25.25	25.67	16
CL572-2753-4-71	FX2-40S-1.27DSL(71)	40	35.45	24.13	30.33	30.75	20
CL572-2754-7-71	FX2-52S-1.27DSL(71)	52	43.07	31.75	37.95	38.37	26
CL572-2755-0-71	FX2-60S-1.27DSL(71)	60	48.15	36.83	43.03	43.45	30
CL572-2756-2-71	FX2-68S-1.27DSL(71)	68	53.23	41.91	48.11	48.53	34
CL572-2757-5-71	FX2-80S-1.27DSL(71)	80	60.85	49.53	55.73	56.15	40
CL572-2758-8-71	FX2-100S-1.27DSL(71)	100	73.55	62.23	68.43	68.85	50
CL572-2759-0-71	FX2-120S-1.27DSL(71)	120	86.25	74.93	81.13	81.55	60

NOTE 1 NUMBER OF PIN.

2 INDICATIONS.

3 SURFACE INDICATED LOT NO. SHALL BE OPTIONAL.

4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

7	PHOSPHOR BRONZE	TIN PLATED	3~6	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2μ m min
1, 2	POLYAMIDE	BLACK	UL94V-0		DIP AREA: TIN-PLATING 2μ m min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	UNDER PLATING: NICKEL 2μ m min

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		A. Saito	H. Doi	H. Ogawa	H. Ogawa	
		05.03.25	05.03.25	05.03.25	05.03.25	

		DRAWING NO.		PART NO.		FX2- **S-1.27DSL(71)	
SCALE		EDC3-083296-21					
UNITS		HRS		CODE NO.			
		HIROSE ELECTRIC CO., LTD		CL572			
mm						1/1	

TO	
PCK	