
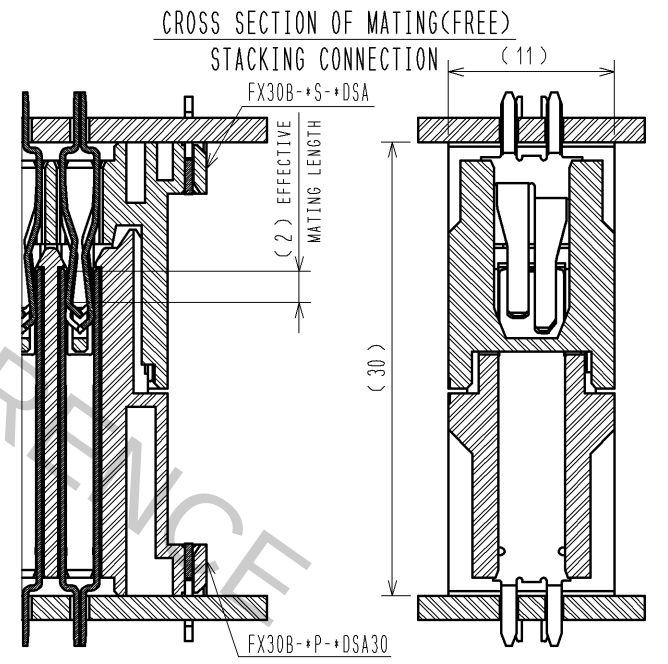
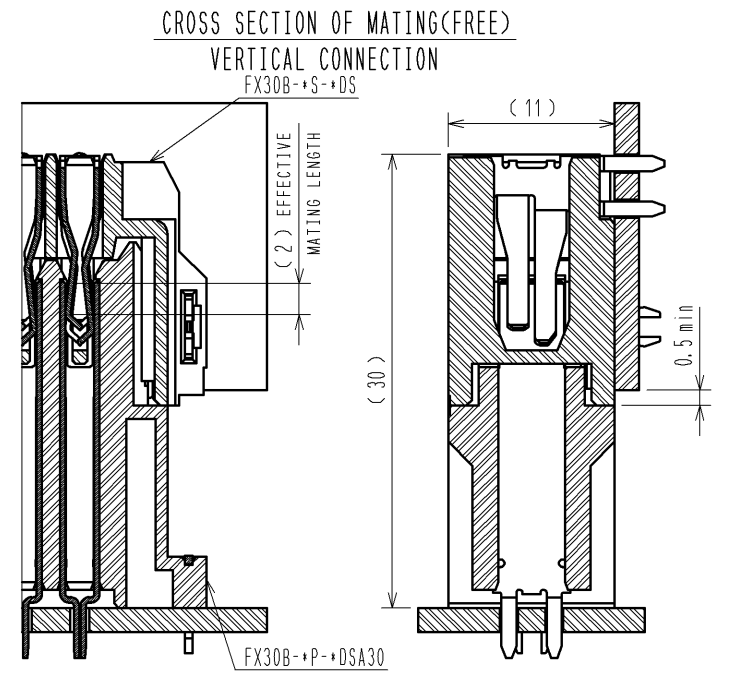
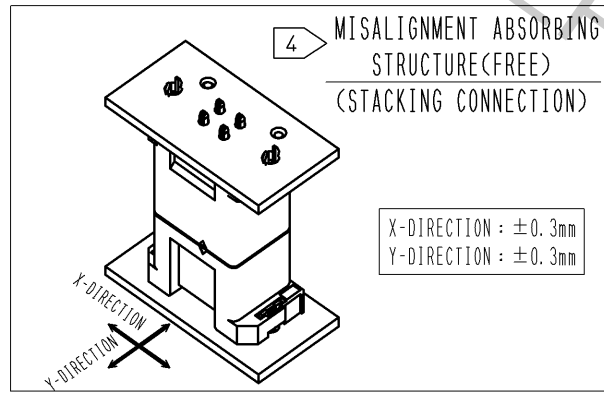

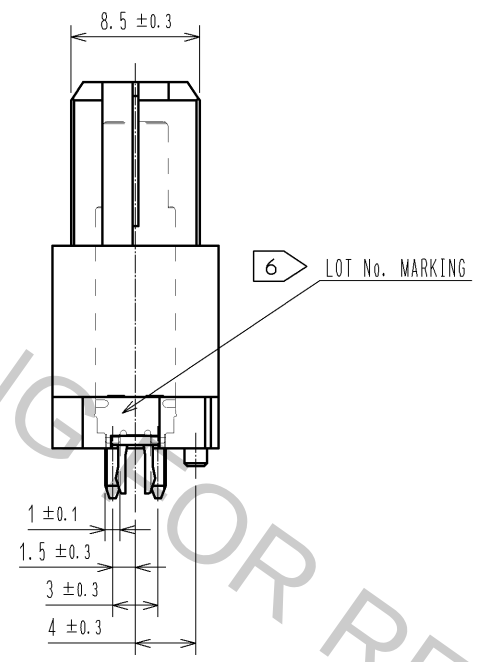
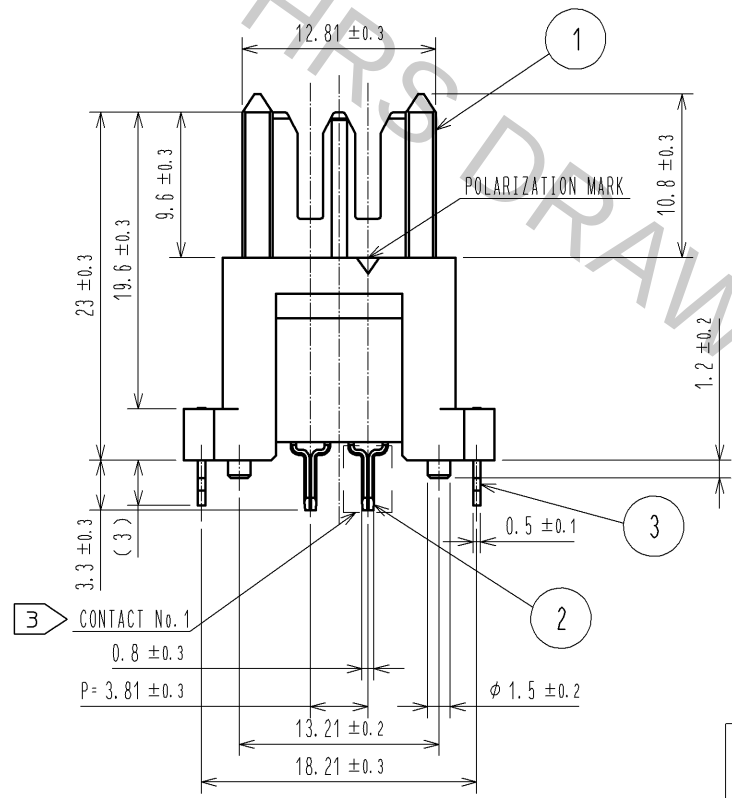
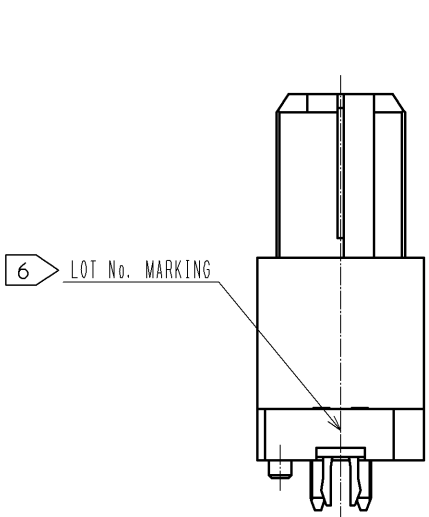


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

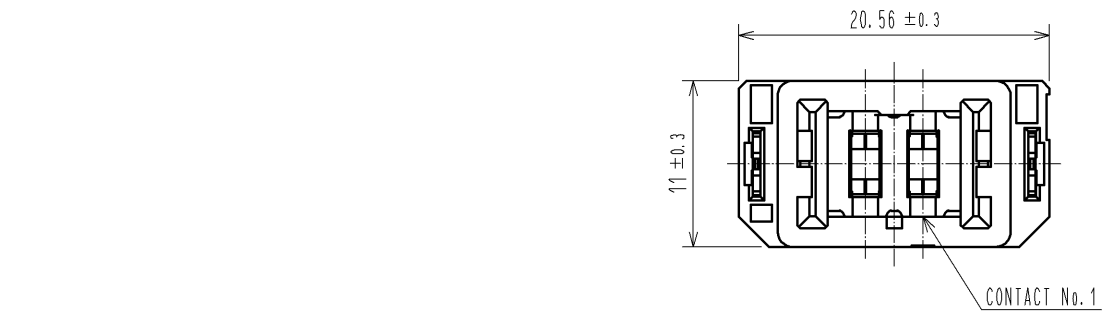


- NOTE
- 1 THIS PRODUCT IS PACKAGED IN TRAY. (49pcs/TRAY)
 - 2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHITCH DOSEN' T AFFECT QUALITY LEVEL. ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
 - 3 FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL) COMPOSE ONE LINE.
 - 4 MISALIGNMENT ABSORBING RANGE: ± 0.3mm max.
 - 5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
 - 6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.


2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm	4	POLYSTYRENE	
		LEAD AREA:TIN-PLATING 1.0 μm			
		UNDER PLATING:NICKEL 1.0 μm			
1	POLYAMIDE	BLACK UL94V-0	3	PHOSPHOR BRONZE	TIN-PLATING 3.0 μm
NO. MATERIAL		FINISH , REMARKS	NO. MATERIAL		FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT		DESCRIPTION OF REVISIONS
		APPROVED : HS. OKAWA 13.03.07		DESIGNED	
				CHECKED	
				DATE	
HIROSE ELECTRIC CO., LTD.		CHECED : KI. HIROKAWA 13.03.07		DRAWING NO.	
				PART NO.	
				CODE NO.	
		DESIGNED : DK. AIMOTO 13.03.07		EDC3-347264-00	
				FX30B-2P-3.81DSA30	
				CL570-3300-2-00	
		DRAWN : DK. AIMOTO 13.03.07			

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.


RECOMMENDED HOLE PATTERN DIMENSION OF PCB(5:1)
(CONNECTOR MOUNTING SIDE, PCB THICKNESS:t=1.6mm)

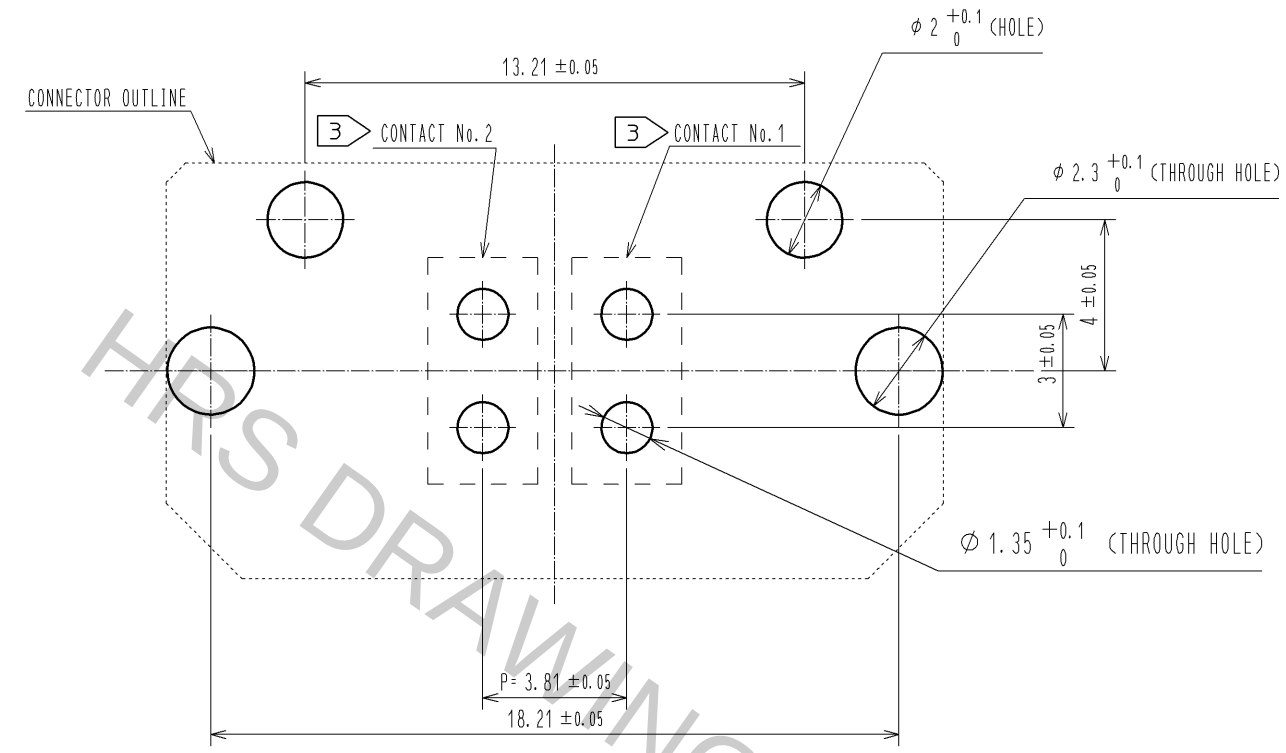

1 DRAWING FOR PACKAGING(1:2)

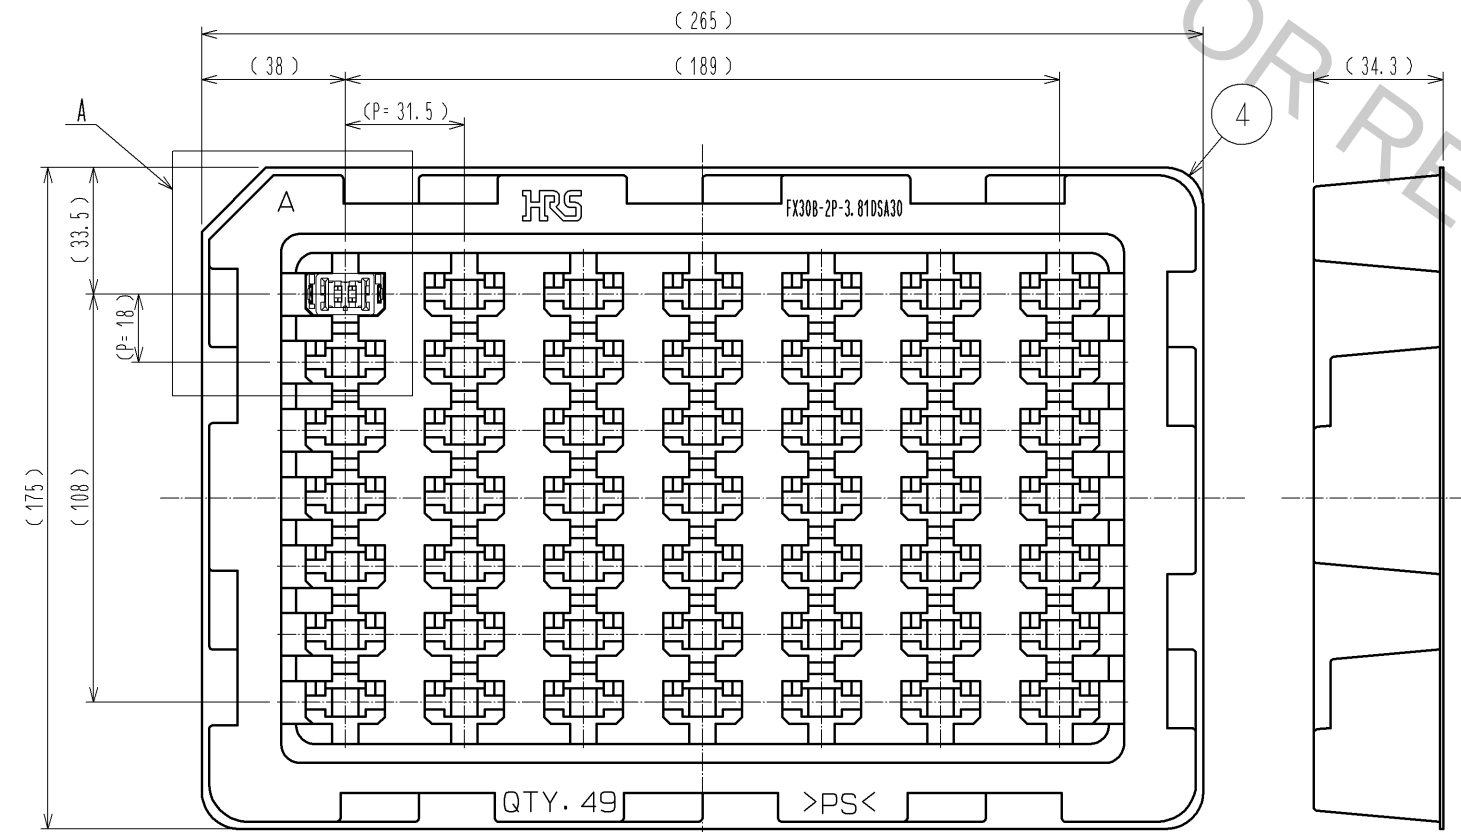

A(1:1)

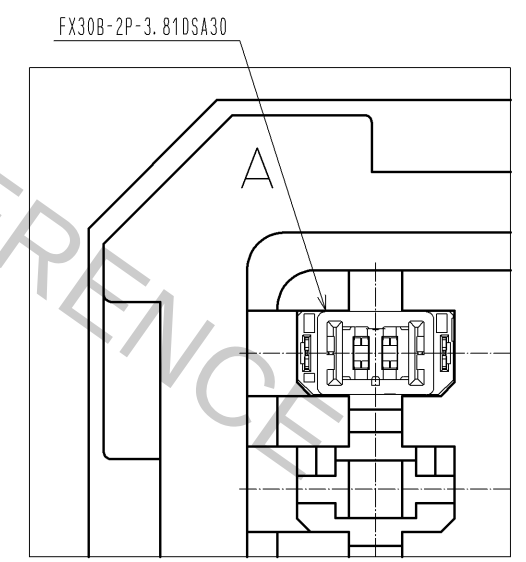

HRS	DRAWING NO.	EDC3-347264-00	22
	PART NO.	FX30B-2P-3.81DSA30	
	CODE NO.	CL570-3300-2-00	