






- NOTE
- 1 THIS PRODUCT IS PACKAGED IN TRAY. (35pcs/TRAY)
 - 2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOSEN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
 - 3 FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL) COMPOSE ONE LINE.
 - 4 MISALIGNMENT ABSORBING RANGE: $\pm 0.3\text{mm}$ max.
 - 5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
 - 6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.
 - 7 POSSIBLE SHORT SHOT AND/OR BURR AT THE INDICATED AREA DOES NOT AFFECT THE PRODUCT QUALITY.


						5	POLYSTYRENE						
						4	PHOSPHOR BRONZE		TIN-PLATING 3.0 μm				
2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm				3	COPPER ALLOY	UNDER PLATING:NICKEL 1.0 μm					
		LEAD AREA:TIN-PLATING 1.0 μm						CONTACT AREA:GOLD-PLATING 0.1 μm					
		UNDER PLATING:NICKEL 1.0 μm						LEAD AREA:TIN-PLATING 1.0 μm					
1	POLYAMIDE	BLACK UL94V-0						UNDER PLATING:NICKEL 1.0 μm					
NO.		MATERIAL		FINISH . REMARKS			NO.		MATERIAL		FINISH . REMARKS		
UNITS mm				SCALE 2 : 1			COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA				13. 03. 07		DRAWING NO. EDC3-347276-00			
				CHECED : KI. HIROKAWA				13. 03. 07		PART NO. FX30B-2S-3. 81DS			
				DESIGNED : DK. AIMOTO				13. 03. 07		CODE NO. CL570-3600-6-00			
				DRAWN : DK. AIMOTO				13. 03. 07					
										 1/2			

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.


RECOMMENDED HOLE PATTERN DIMENSION OF PCB(5:1)
(CONNECTOR MOUNTING SIDE, PCB THICKNESS: $t=1.6\text{mm}$)

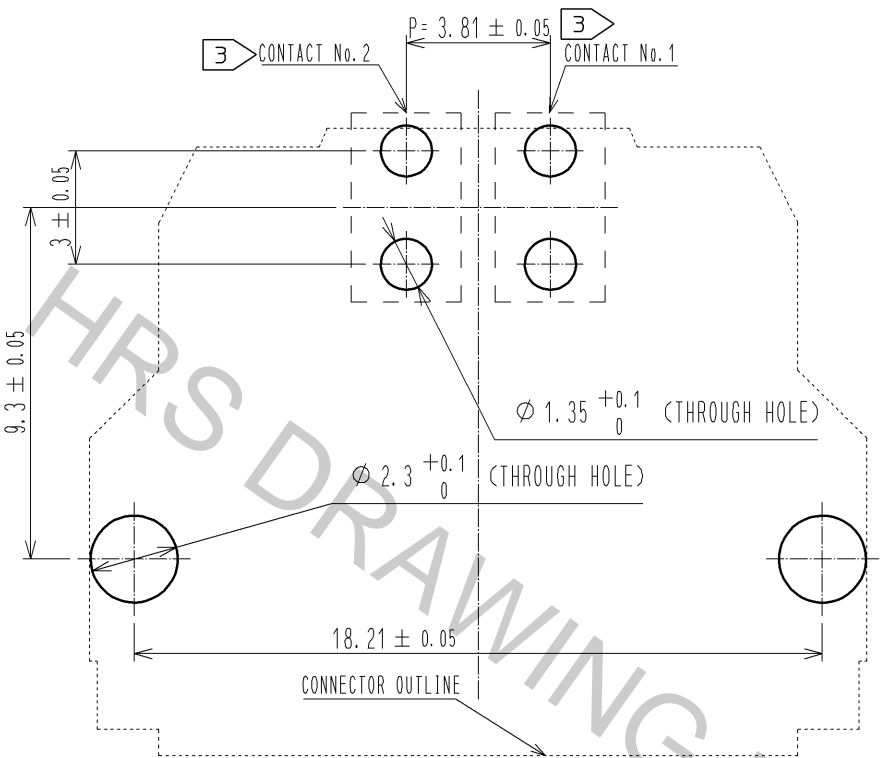

1 DRAWING FOR PACKAGING(1:2)

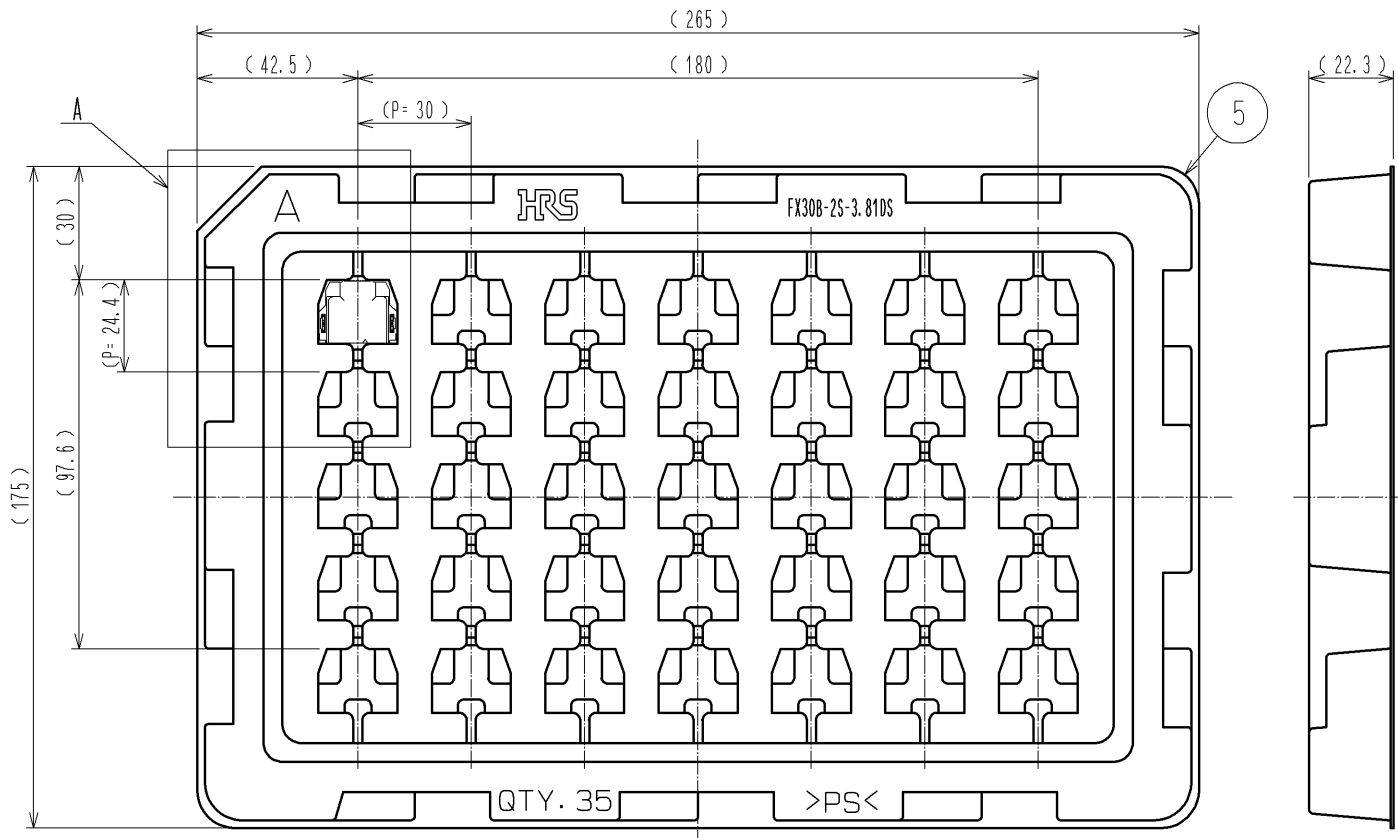

A(1:1)

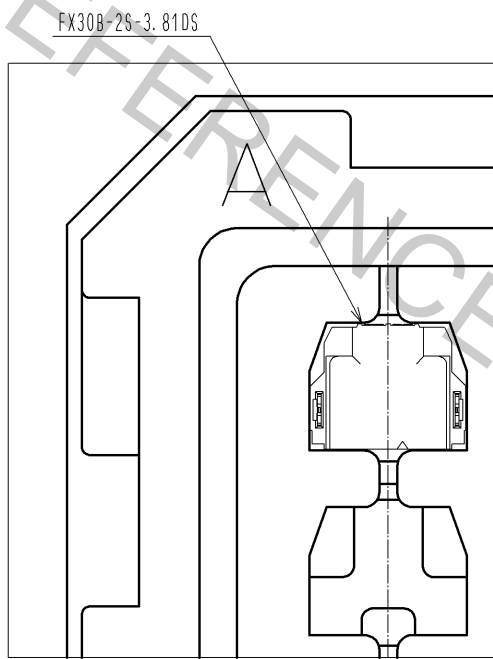

HRS

DRAWING NO.	EDC3-347276-00
PART NO.	FX30B-2S-3.81DS
CODE NO.	CL570-3600-6-00

2/2