







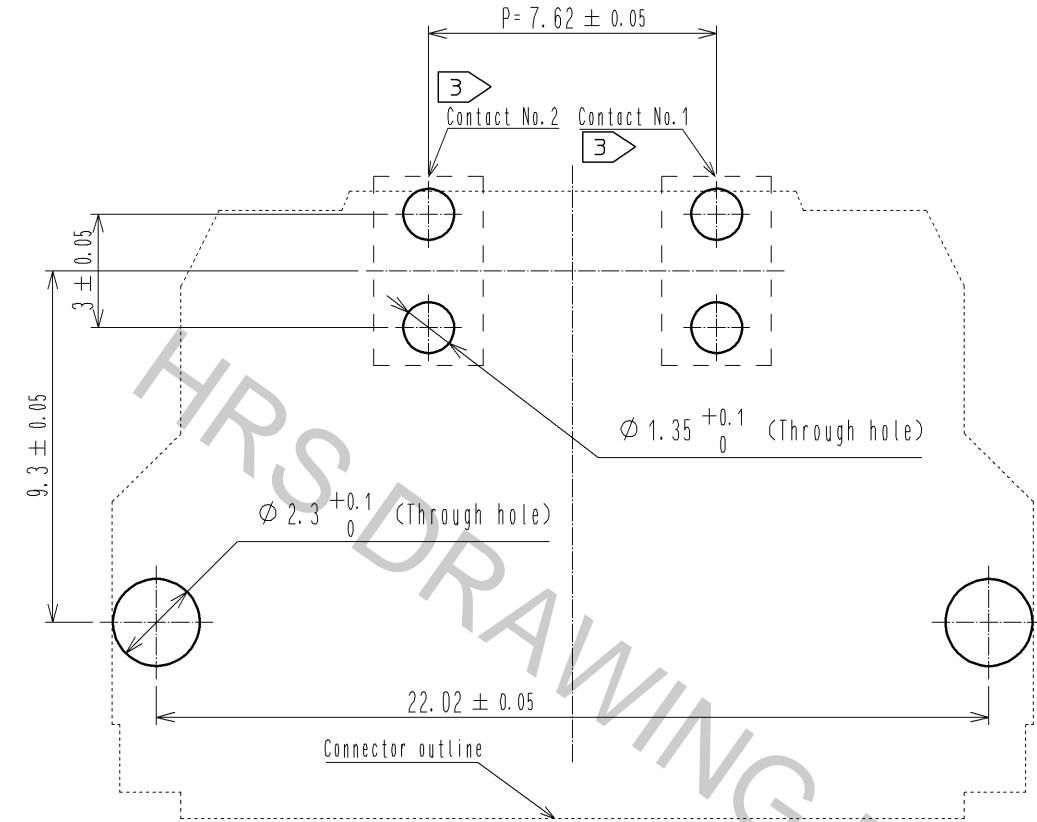


NOTE 1 This product is packaged in tray.(30pcs/tray)
2 Blemish and hit mark can be occurred through out the manufacturing process
whitch dosen' t affect quality level.
Also, black spot could be observed on the surface of housing.
3 For the contact NO., adjacent two pairs of leads placed back-to-back (4 leads in total)
Compose one line.
4 Misalignment absorbing range:±0.3mm max.
5 The dimension in parentheses are for references.
6 Lot NO. is indicated at either one of the position as shown.
7 Possible short shot and/or burr at the indicated area does not affect the product quality.


			5	Polystyrene											
			4	Phosphor bronze	Tin-plating 3.0μm Under plating:Nickel 1.0μm										
2	Copper alloy	Contact area:Gold-plating 0.1μm	3	Copper alloy	Contact area:Gold-plating 0.1μm										
		Lead area:Tin-plating 1.0μm			Lead area:Tin-plating 1.0μm										
		Under plating:Nickel 1.0μm			Under plating:Nickel 1.0μm										
1	Polyamide	Black UL94V-0													
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS									
<table><tr><td>UNITS mm</td><td></td><td>SCALE 2 : 1</td><td></td><td>COUNT</td><td>DESCRIPTION OF REVISIONS</td><td>DESIGNED</td><td>CHECKED</td><td>DATE</td></tr></table>							UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE							
 HIROSE ELECTRIC CO., LTD.		APPROVED :HS. OKAWA	14. 09. 12	DRAWING NO. EDC3-350408-00											
		CHECED :KN. SHIBUYA	14. 09. 12	PART NO. FX30B-2S-7. 62DS											
		DESIGNED :DK. AIMOTO	14. 09. 12	CODE NO.											
		DRAWN :DK. AIMOTO	14. 09. 12	CL570-3604-7-00											
					 1/2										

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.


Recommended hole pattern dimension of PCB(5:1)
(Connector mounting side, PCB thickness:t=1.6mm)




1 Drawing for packaging(1:2)

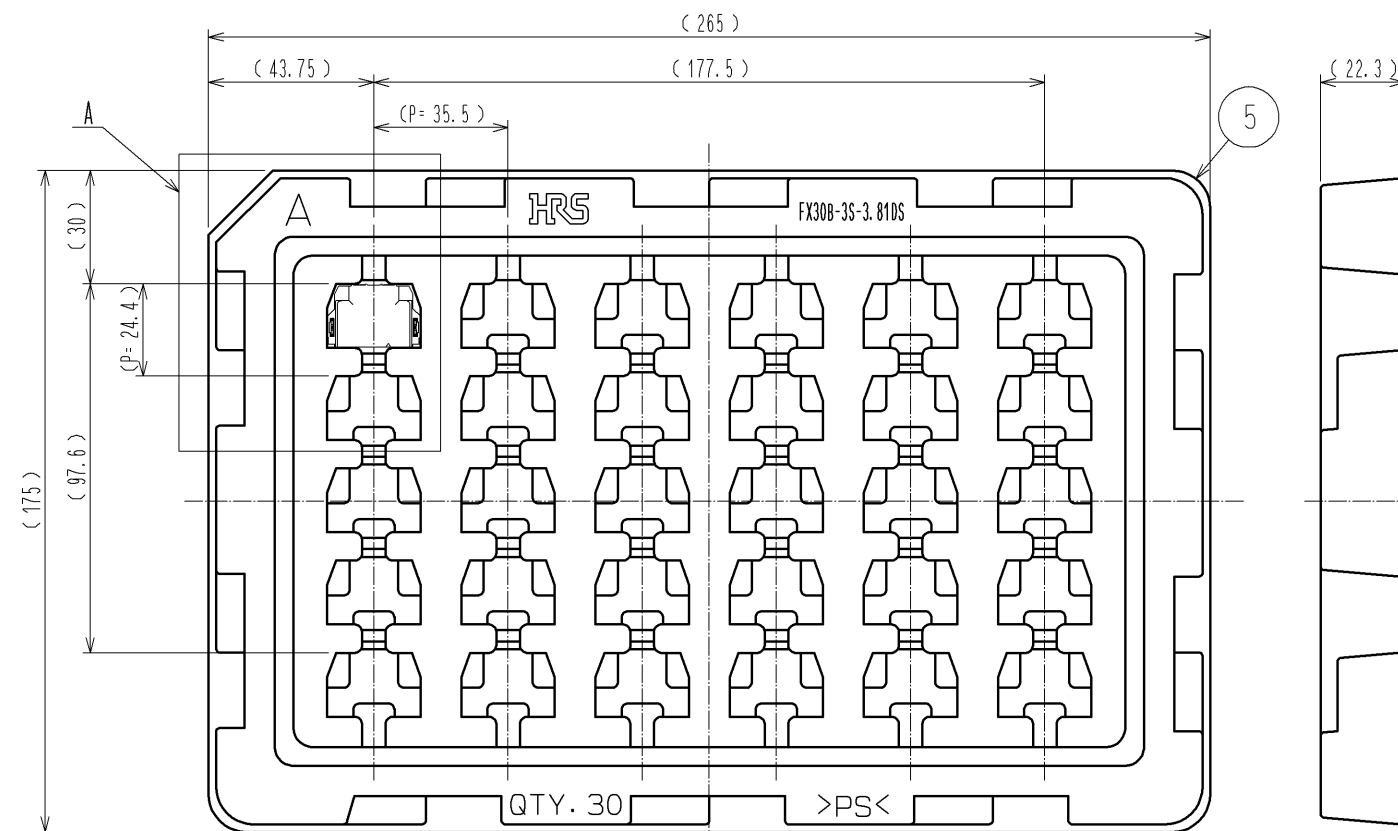

A(1:1)

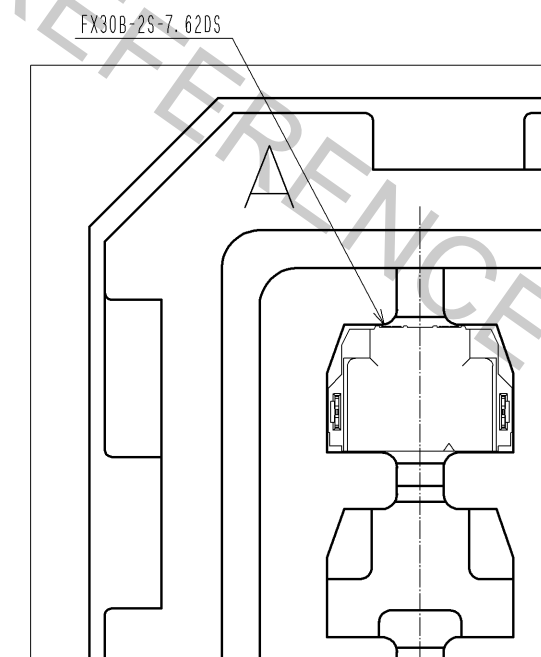

HRS	DRAWING NO.	EDC3-350408-00		2/2
	PART NO.	FX30B-2S-7.62DS		
	CODE NO.	CL570-3604-7-00		