

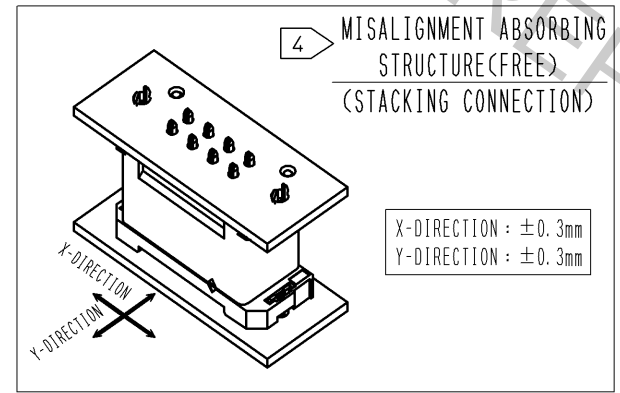
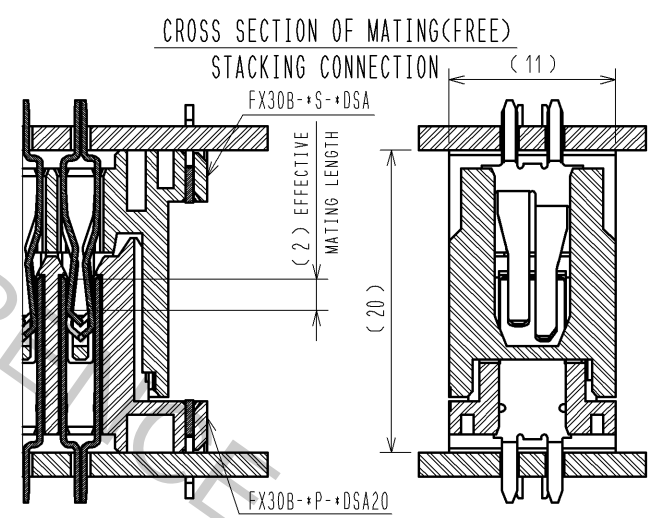
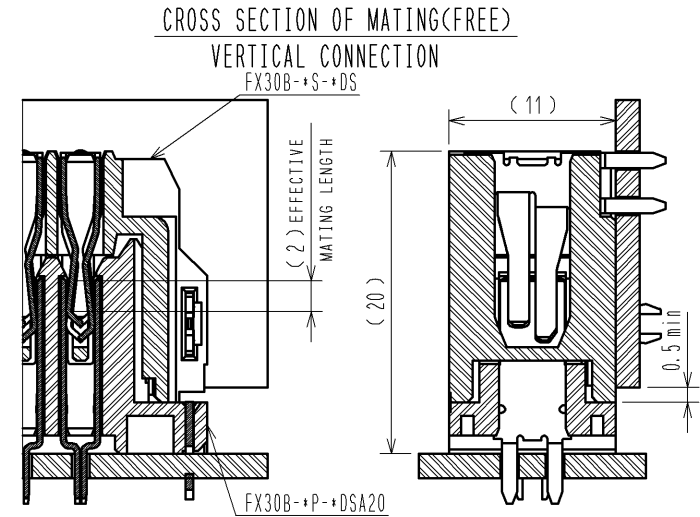
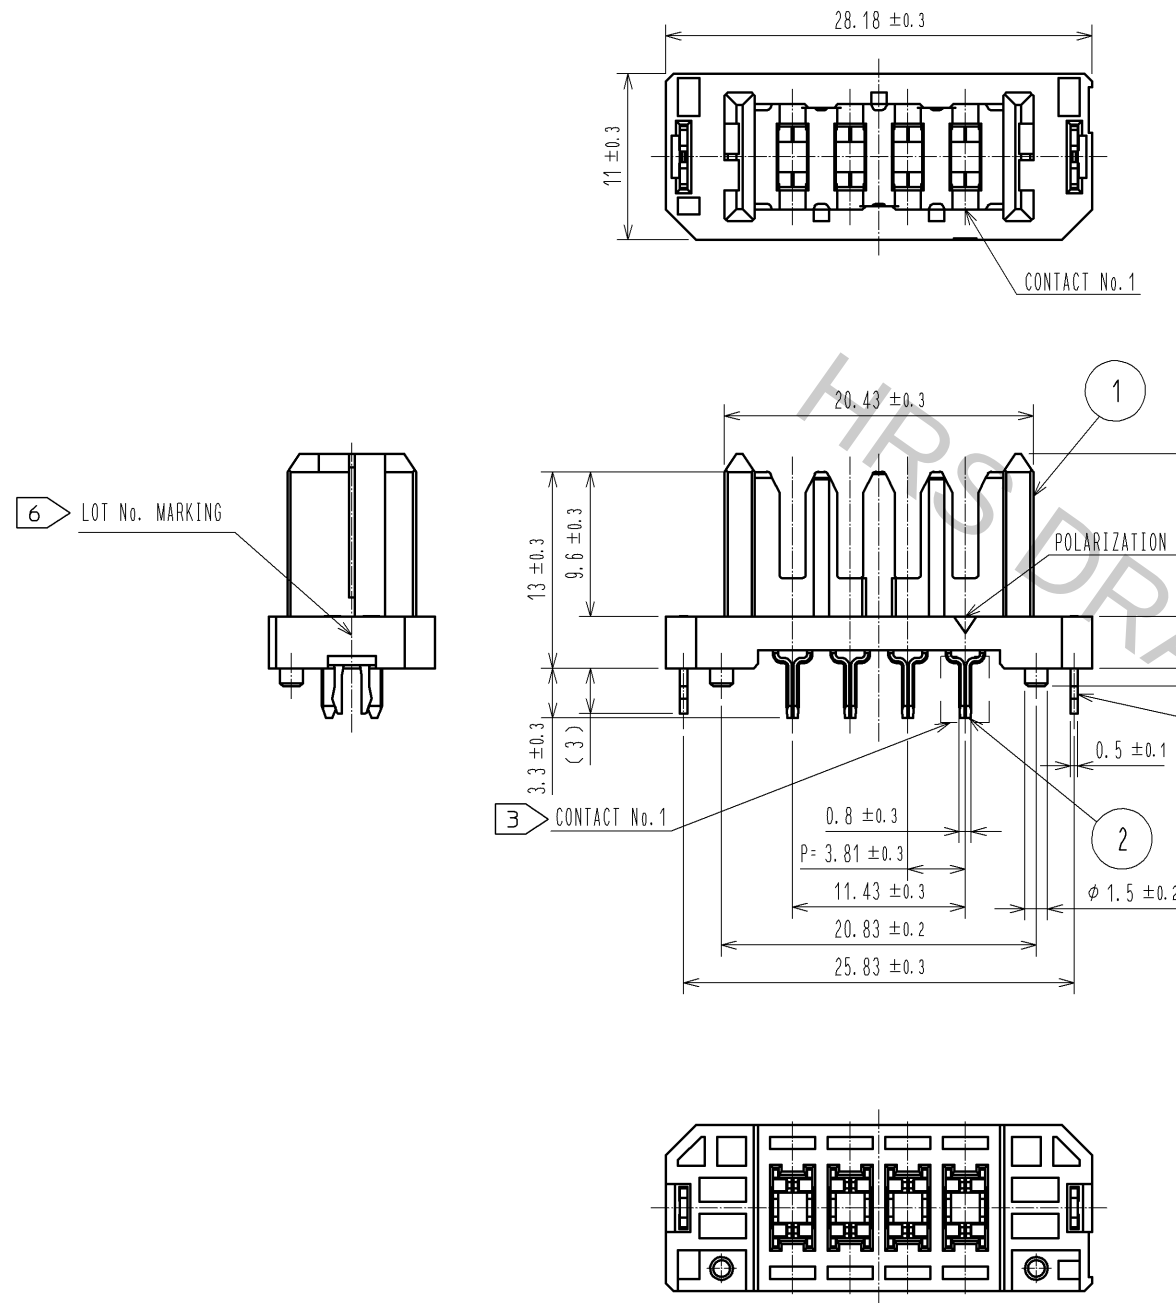




NOTE 1 THIS PRODUCT IS PACKAGED IN TRAY. (35pcs/TRAY)
2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS
WHICH DOESN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
3 FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL)
COMPOSE ONE LINE.
4 MISALIGNMENT ABSORBING RANGE: ± 0.3mm max.
5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.

2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm			4	POLYSTYRENE	TIN-PLATING 3.0 μm	
		LEAD AREA:TIN-PLATING 1.0 μm						
		UNDER PLATING:NICKEL 1.0 μm						
1	POLYAMIDE	BLACK UL94V-0			3	PHOSPHOR BRONZE	UNDER PLATING:NICKEL 1.0 μm	
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS	
UNITS mm		SCALE 2 : 1	 COUNT 2	DESCRIPTION OF REVISIONS DIS-F-006956		DESIGNED DK. AIMOTO	CHECKED KI. HIROKAWA	DATE 13.08.26
 HIROSE ELECTRIC CO., LTD.			APPROVED :HS. OKAWA 13.03.13		DRAWING NO. EDC3-347257-00			
			CHECED :KI. HIROKAWA 13.03.12		PART NO. FX30B-4P-3.81DSA20			
			DESIGNED :DK. AIMOTO 13.03.11		CODE NO. CL570-3102-9-00			
			DRAWN :DK. AIMOTO 13.03.11		 1 / 2			

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

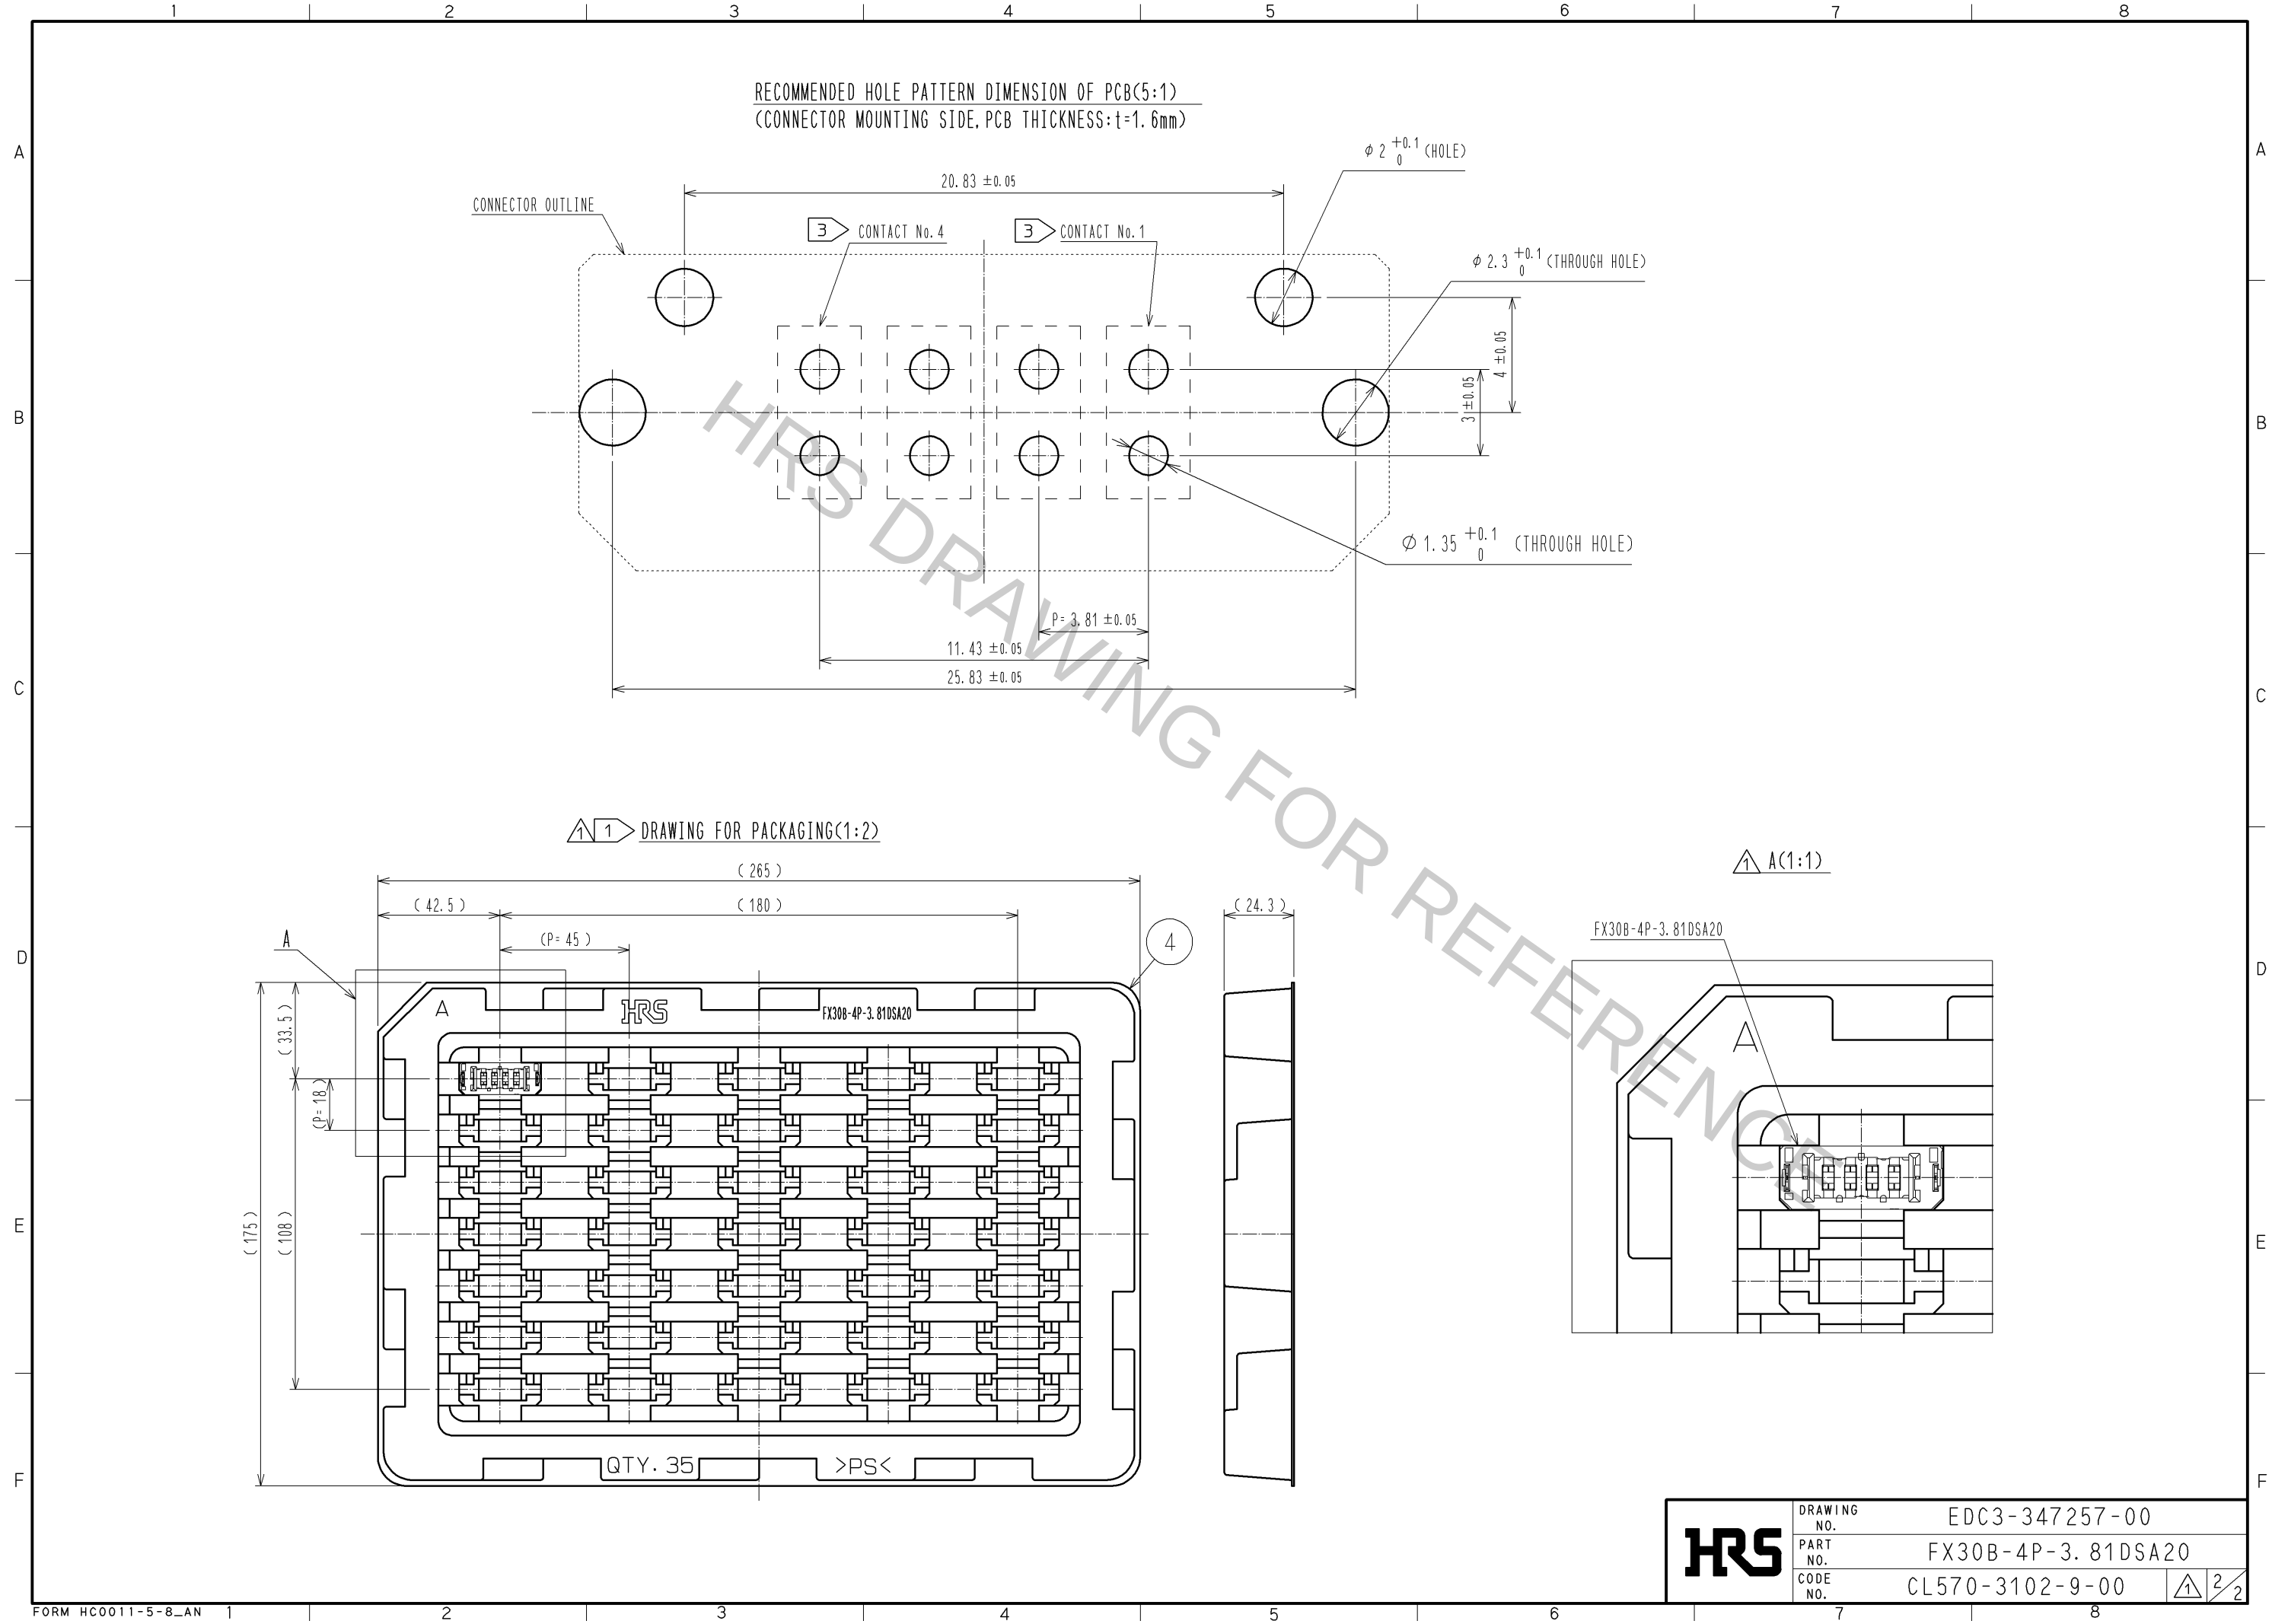

HRS	DRAWING NO.	EDC3-347257-00	
	PART NO.	FX30B-4P-3.81DSA20	
	CODE NO.	CL570-3102-9-00	1/2