
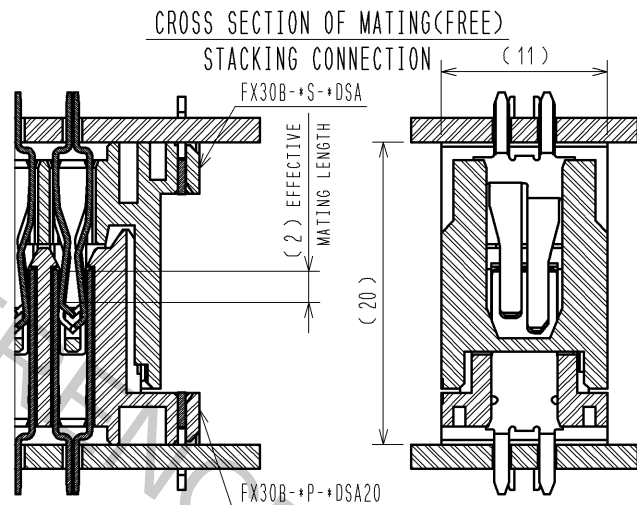
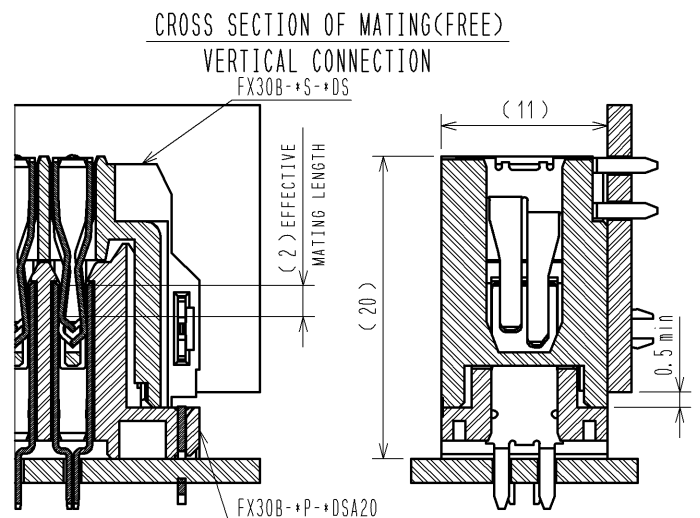
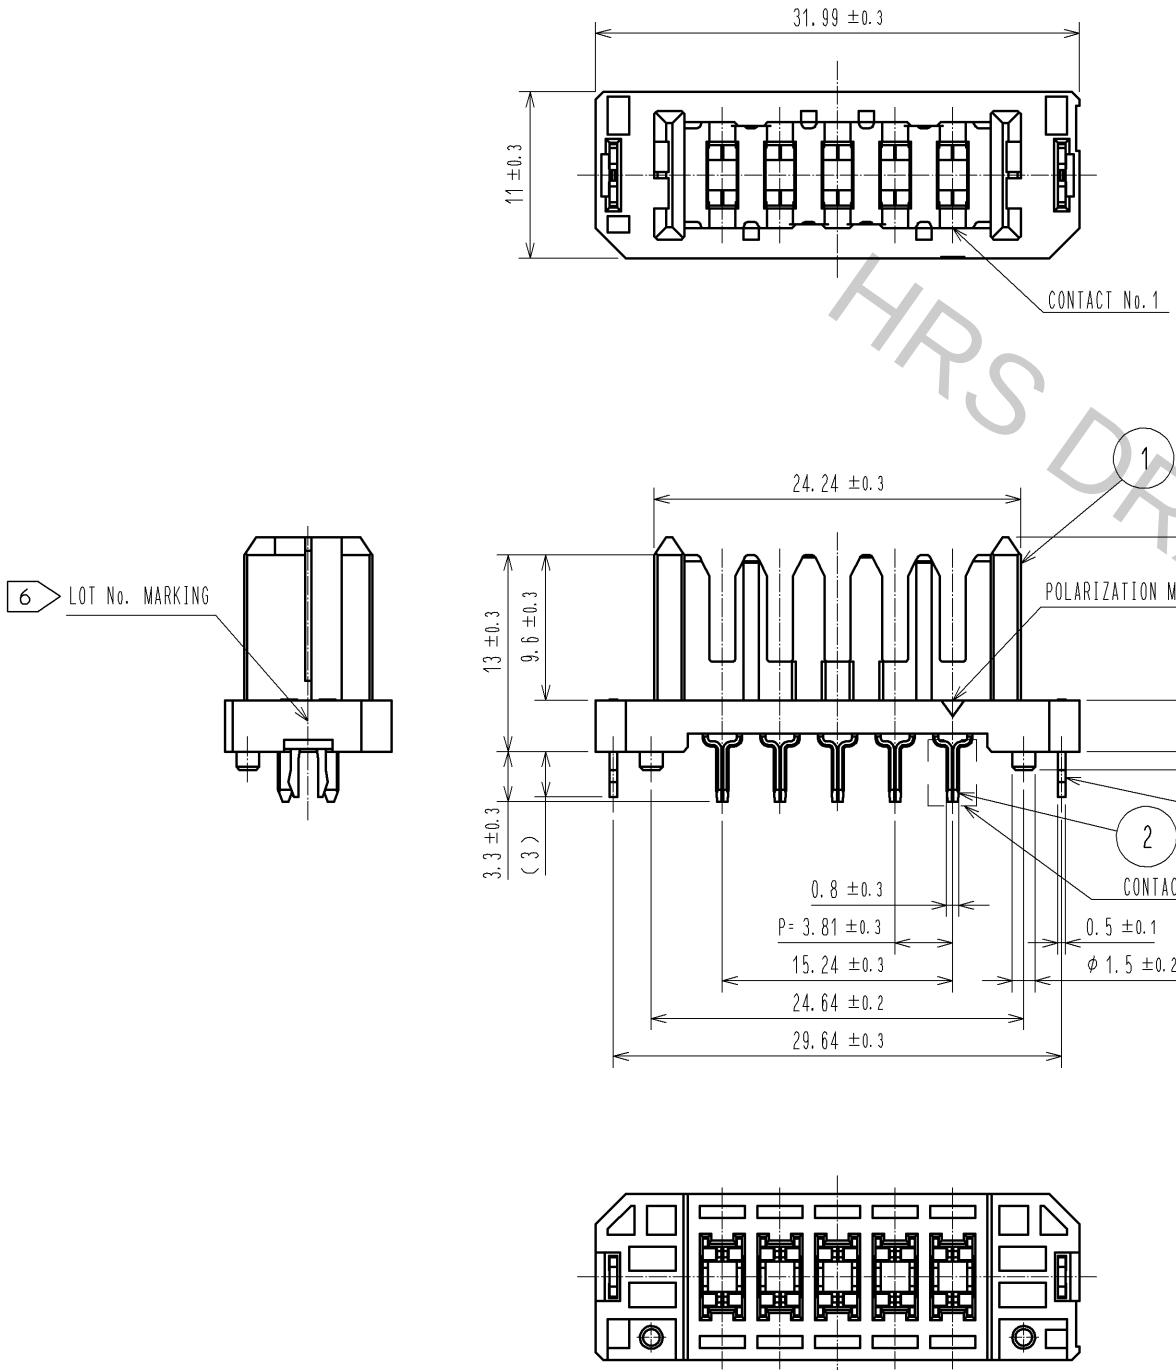


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.




- NOTE
- 1 THIS PRODUCT IS PACKAGED IN TRAY. (35pcs/TRAY)
 - 2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOSEN'T AFFECT QUALITY LEVEL. ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
 - 3 FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL) COMPOSE ONE LINE.
 - 4 MISALIGNMENT ABSORBING RANGE: ± 0.3mm max.
 - 5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
 - 6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.


2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm			4	POLYSTYRENE		
		LEAD AREA:TIN-PLATING 1.0 μm						
		UNDER PLATING:NICKEL 1.0 μm					TIN-PLATING 3.0 μm	
1	POLYAMIDE	BLACK UL94V-0			3	PHOSPHOR BRONZE	UNDER PLATING:NICKEL 1.0 μm	
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS	
UNITS mm		SCALE 2 : 1	COUNT  2	DESCRIPTION OF REVISIONS DIS-F-006956		DESIGNED DK. AIMOTO	CHECKED KI. HIROKAWA	DATE 13. 08. 26
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		13. 03. 13	DRAWING NO. EDC3-347258-00			
		CHECED : KI. HIROKAWA		13. 03. 12	PART NO. FX30B-5P-3. 81DSA20			
		DESIGNED : DK. AIMOTO		13. 03. 11	CODE NO. CL570-3103-1-00			
		DRAWN : DK. AIMOTO		13. 03. 11	 1 / 2			

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

RECOMMENDED HOLE PATTERN DIMENSION OF PCB(5:1)
(CONNECTOR MOUNTING SIDE, PCB THICKNESS: t=1.6mm)

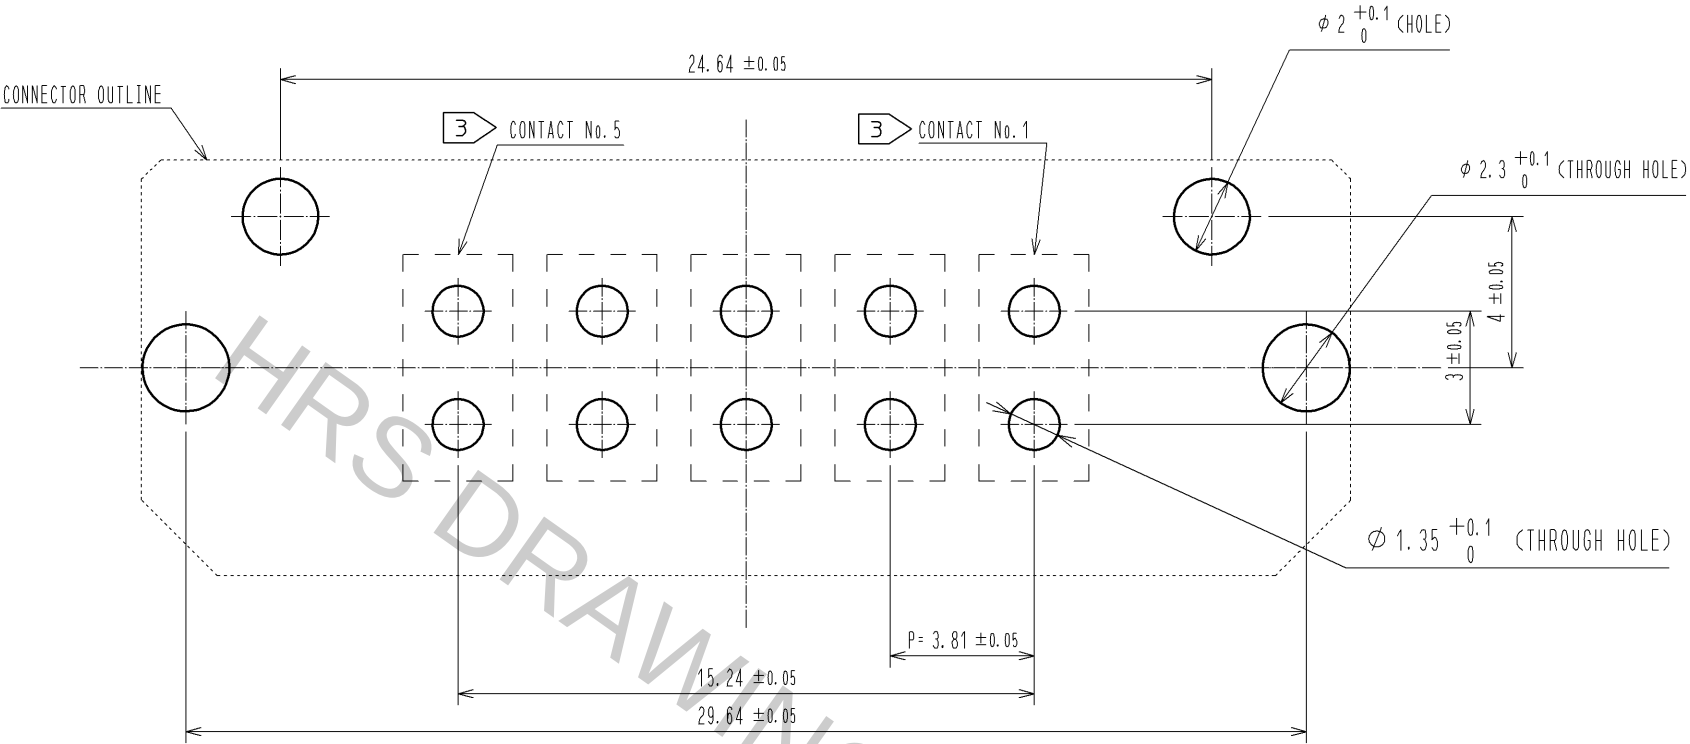


1 DRAWING FOR PACKAGING(1:2)

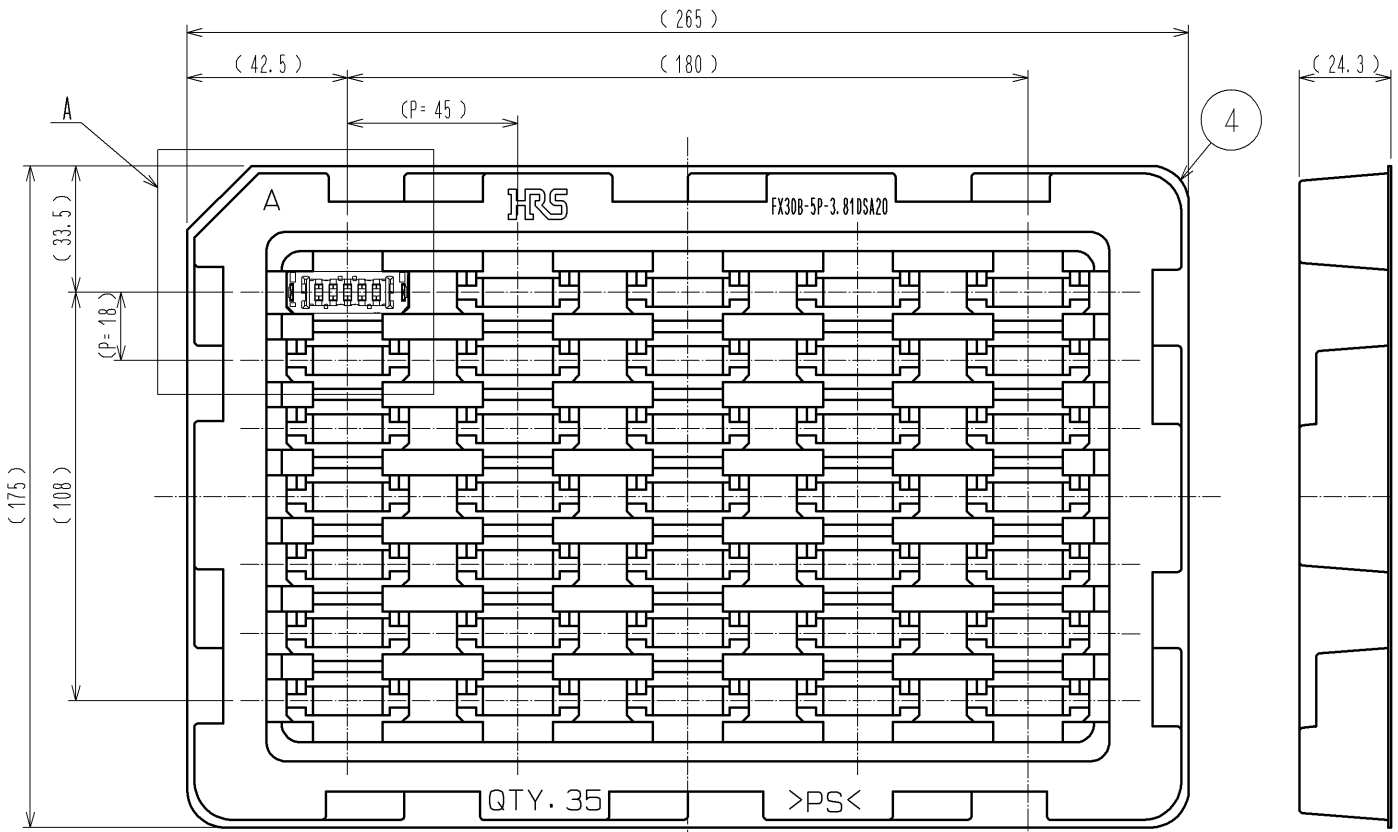

A(1:1)

FX30B-5P-3.81DSA20

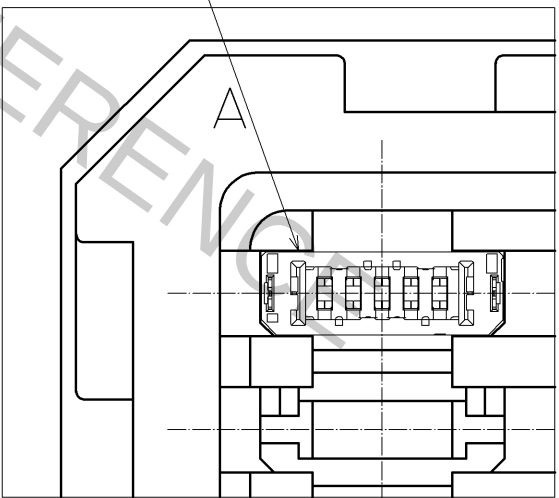

HRS

DRAWING NO.	EDC3-347258-00
PART NO.	FX30B-5P-3.81DSA20
CODE NO.	CL570-3103-1-00

2/2