
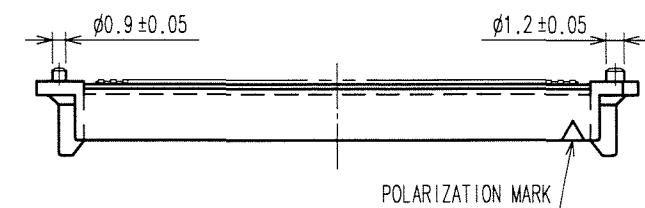
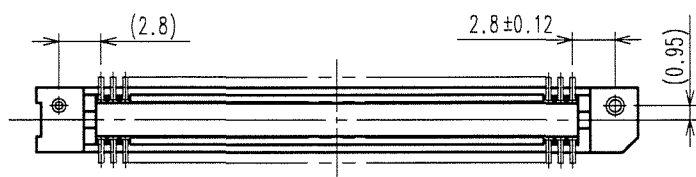
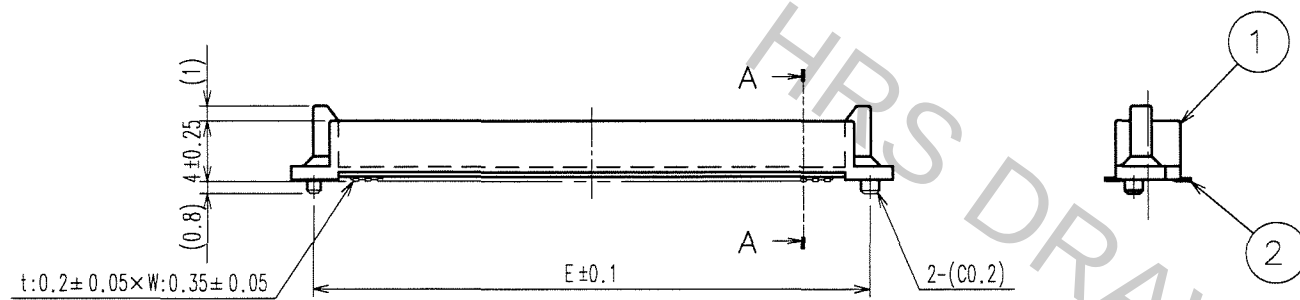
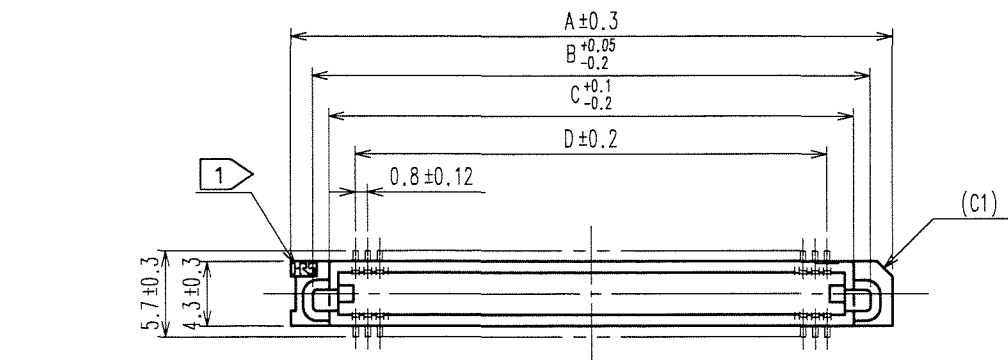
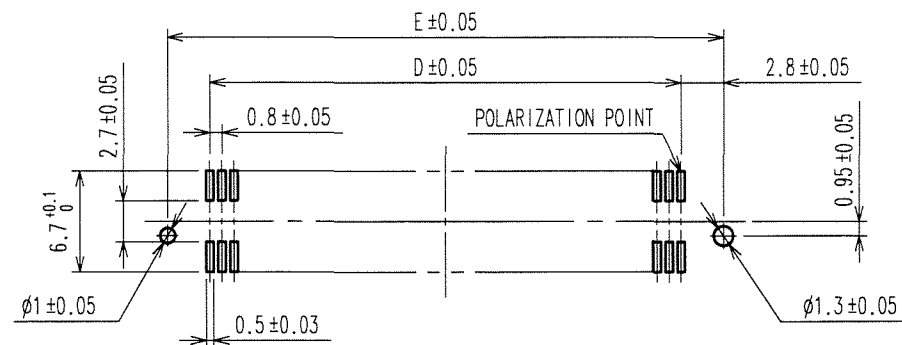


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

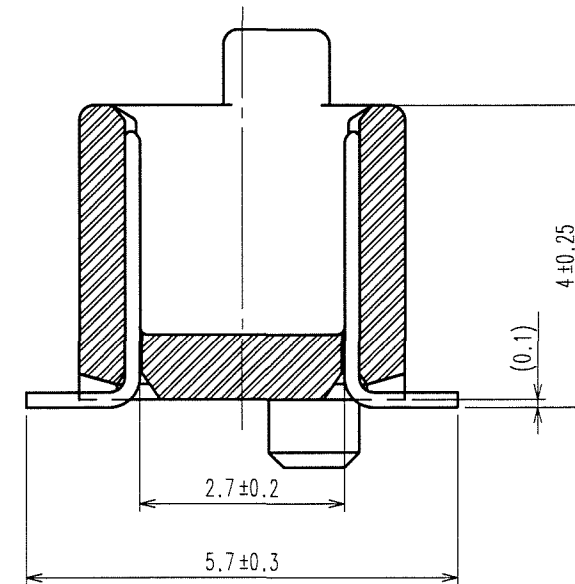

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)


$$\underline{A - A(10:1)}$$


PART No.	CODE No.	5	A	B	C	D	E
FX6- 20P-0.8SV(71)	CL576-0001-3-71	20	15.8	12.9	10.7	7.2	12.8
FX6- 40P-0.8SV(71)	CL576-0003-9-71	40	23.8	20.9	18.7	15.2	20.8
FX6- 50P-0.8SV(71)	CL576-0004-1-71	50	27.8	24.9	22.7	19.2	24.8
FX6- 60P-0.8SV(71)	CL576-0005-4-71	60	31.8	28.9	26.7	23.2	28.8
FX6- 80P-0.8SV(71)	CL576-0007-0-71	80	39.8	36.9	34.7	31.2	36.8
FX6-100P-0.8SV(71)	CL576-0008-2-71	100	47.8	44.9	42.7	39.2	44.8

NOTE

- 1) MARK SHALL BE OPTIONAL.
- 2) LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3) FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
- 4) THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
- 5) NUMBER OF CONTACTS.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.	
						LEAD AREA:GOLD FLASH
						UNDER PLATING:NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED
			A. SUZUKAWA	<i>M. Nakamura</i>	<i>M. Ogawa</i>	<i>H. Okawa</i>
			06.05.23	06.05.24	06.05.24	06.05.24
DRAWING NO.			PART NO.			
EDC3-071174-25			FX6-**-P-0.8SV(71)			
SCALE			CODE NO.			
FREE			CL576			
UNITS			1/1			
mm						
HRS						
HIROSE ELECTRIC CO., LTD						