



## **LED Floodlight with PIR - White** **Models: PELL0283, PELL0284, PELL0285** **PELL0286 and PELL0287**

**Please read these instructions carefully before use and retain for future reference.**


This floodlights must be installed by a qualified electrician in accordance with current building and IET wiring regulations (BS7671).

### **IMPORTANT SAFETY INFORMATION**


- Do not use PVC cable to connect this floodlight to your wiring supply. Rubberised cable (type H05RN-F), with three conductors of at least 1.0mm<sup>2</sup> cross-sectional area must be used. This product must be connected to Earth.
- The front of this floodlight is made of tempered glass, replace if cracked.
- LED lamps are extremely bright. To avoid possible damage to the eyes, do not stare into an LED beam.
- In use, avoid touching any external surface of the floodlight, due to the possibility of high temperatures.
- Do not use near flammable materials.
- The floodlight must be positioned so that there is at least 1m between the front of the light unit and the surface to be illuminated.
- It is suitable for use in an ambient temperature between -30°C and +45°C.

## POSITIONING

- This floodlight is suitable for outdoor lighting applications, for domestic use only.
- Do not use in areas where an explosive or chemical atmosphere may exist. Do not use in areas where ventilation is restricted.
- It is suitable for mounting on plasterboard, wood or masonry surfaces. Highly flammable surfaces such as plastic or polystyrene must not be used.
- Do not install on damp or conductive surfaces such as metal. It should be placed away from any flammable materials.
- Before drilling any fixing holes, check that there are no hidden obstructions behind the mounting surface such as pipes or cables.
- The recommended height for installation of the floodlight is between 0.5 and 3 metres.
- Ensure that there is space around the floodlight to allow adequate circulation of air.
- Orientation of the floodlight is important as shown below:

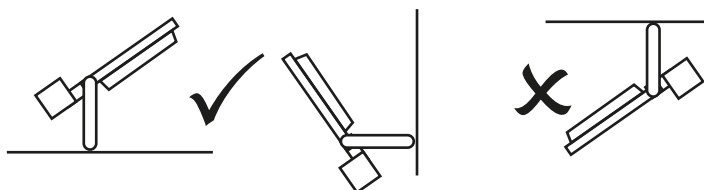

The floodlight has a beam angle of  $120^\circ$ . It can be tilted upwards and downwards at a recommended angle of approximately  $90^\circ$ . The angle of adjustment will vary slightly between models.

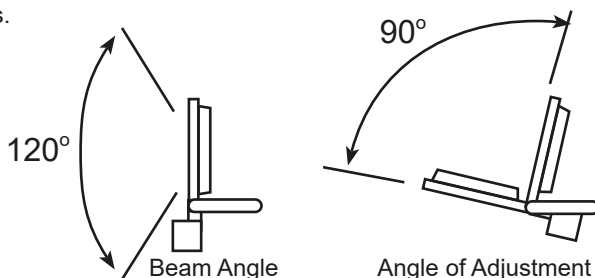

## INSTALLATION

The floodlight is suitable for connection to a 220-240V 50Hz earthed AC supply. It is designed for permanent connection to fixed wiring, which must be a suitable circuit protected by an RCD with an operating current not exceeding 30mA and an MCB or fuse of the correct rating.

### Mounting the Floodlight

- Before commencing installation, check that you have all of the tools you need.
- Check that the floodlight is not damaged. If there is any damage, return it to the place of purchase. Do not attempt to repair it yourself.
- Choose your location to fix the floodlight, taking into account the guidance above.
- Use the floodlight bracket to mark the position of the fixing holes.
- Drill the fixing holes and fix the floodlight into position using appropriate size screws and wall plugs (not provided). Check that it is securely fixed.

## Wiring the Floodlight


- Ensure that the mains supply is isolated before commencing installation.
- A suitable rated connector must be used to connect the lead from the floodlight to the mains supply.
- Connect the mains cable to the connector. Ensure that the correct polarities for Live, Neutral and Earth are observed i.e.
  - Green/yellow - Earth terminal
  - Brown - Live terminal
  - Blue - Neutral terminal

After wiring, check that there are no stray strands and that all the wires have been correctly installed.

- Before connecting power, perform the electrical tests specified in the current Building and IET Wiring Regulation to ensure that the installation is safe and that the wiring has been performed correctly.
- Restore the mains power supply and check that the floodlight illuminates the required area. Tighten the floodlight using the bolts on the brackets.

## OPERATION

- **Adjusting the PIR Sensor**
- There are three adjustments on the back of the PIR sensor, one adjusts the duration the floodlight remain lit, the second one is for the sensitivity of movement detection and the third is to set the level of ambient light before the sensor triggers the illumination. Some trial and error may be required to set these correctly.
- Adjust the light level so the floodlight doesn't activate until the light level is low enough for floodlighting to be required.
- Adjust the timer setting for the required duration you require for the floodlight to remain illuminated.

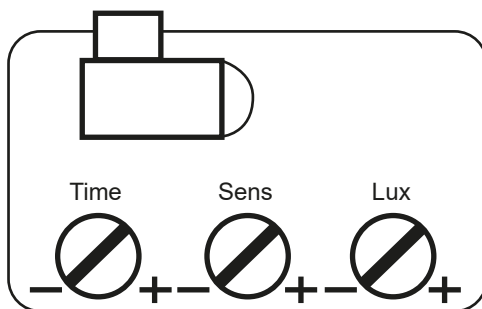

## CLEANING & MAINTENANCE

- Clean the floodlight only with a soft dry cloth. Do not use any chemicals, abrasives or solvents that could damage the floodlight.
- The floodlight has a sealed LED lamp and is maintenance free. The LED lamp cannot be replaced. When the LED lamp reaches the end of its life, the floodlight will have to be replaced.

## SPECIFICATION

These products contain a light source of energy efficiency class F

Model	PELL0283	PELL0284	PELL0285	PELL0286	PELL0287
Cable length	1m	1m	1m	1m	1m
Input Voltage	220-240V AC 50Hz	220-240V AC 50Hz	220-240V AC 50Hz	220-240V AC 50Hz	220-240V AC 50Hz
Luminous flux	720lm	1450lm	2200lm	3800lm	7600lm
Wattage	10W	20W	30W	50W	100W
Beam angle	120°	120°	120°	120°	120°
Dimmable	No	No	No	No	No
Nominal lifetime	25,000h	25,000h	25,000h	25,000h	25,000h
Light source	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Colour temperature	6000K	6000K	6000K	6000K	6000K
Ingress rating	IP44	IP44	IP44	IP44	IP44
PIR Detection Range	8M (±2M) max	8M (±2M) max	8M (±2M) max	8M (±2M) max	8M (±2M) max
PIR Lux Adjustment	<5-2000lux	<5-2000lux	<5-2000lux	<5-2000lux	<5-2000lux
PIR Detection Angle	120°	120°	120°	120°	120°
PIR Time Setting	10Sec (±3s) - 10min (±2min)	10Sec (±3s) - 10min (±2min)	10Sec (±3s) - 10min (±2min)	10Sec (±3s) - 10min (±2min)	10Sec (±3s) - 10min (±2min)
Earthing	Class I	Class I	Class I	Class I	Class I
Weight	0.32kg	0.42kg	0.61kg	0.79kg	1.33kg
Dimensions WxHxD (mm)	163x95x60	174x115x60	208x147x61	235x173x60	316x225x66



### INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT.

When this product has reached the end of its life it must be treated as Waste Electrical & Electronic Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Contact your local authority for details of recycling schemes in your area.

Made in China  
PO Box 13362 Dublin 2  
PR2 9PP

Man Rev 1.2