
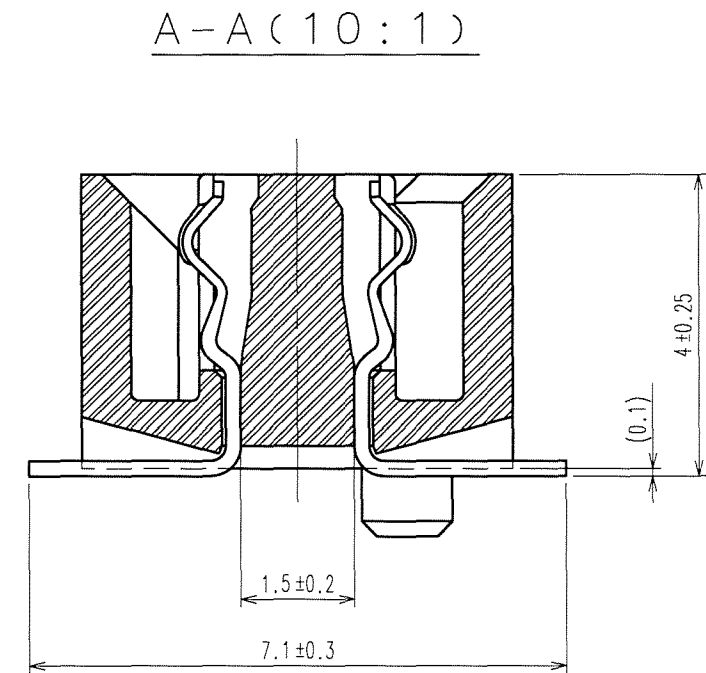


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.


In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

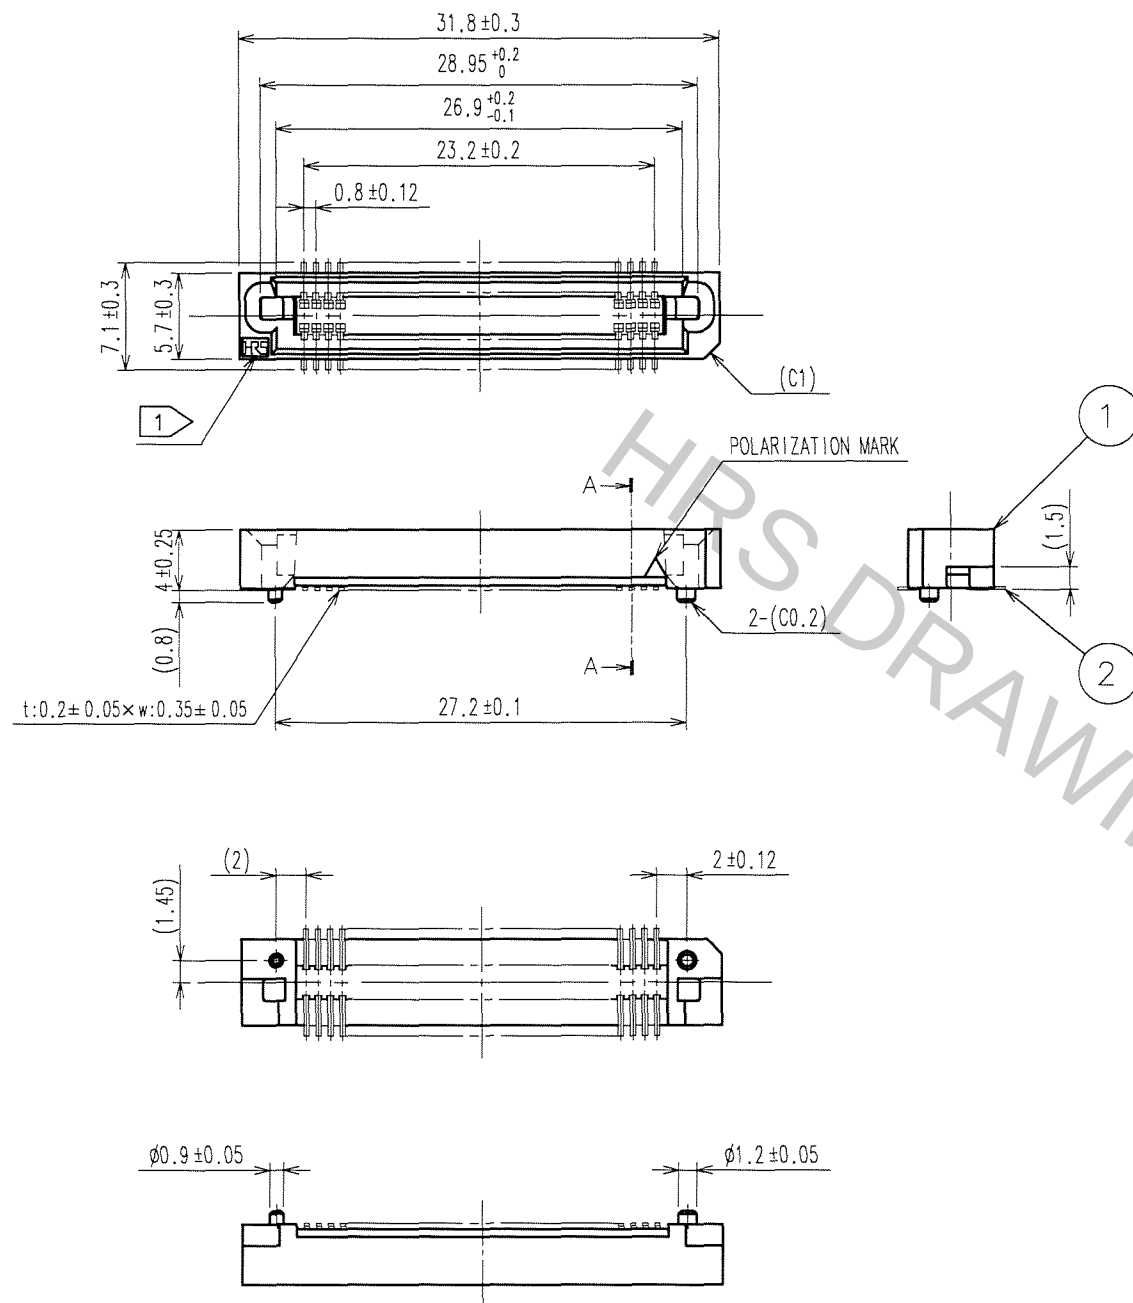

- NOTE 1 HRS MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 FOR MODIFICATION,ETC,PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

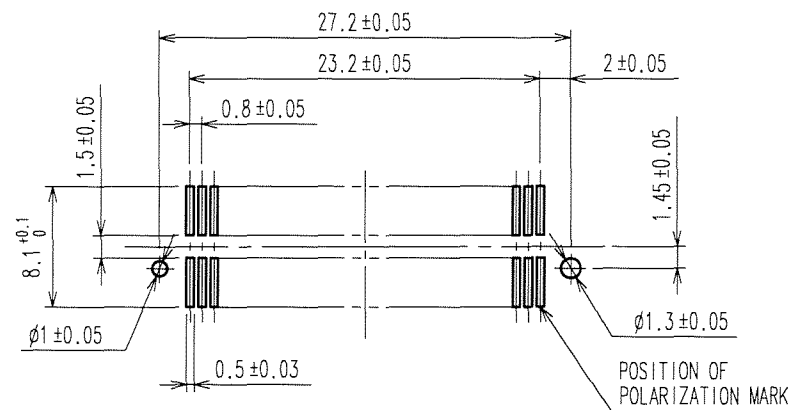

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μ m min.		
					LEAD AREA:TIN-PLATING 1μ m min.		
					UNDER PLATING:NICKEL 2μ m min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			K.NAKAMURA 07.02.05	K.NAKAMURA 07.02.05	Y. Ozawa 07.02.05	H. Okawa 07.02.06	. .
		DRAWING NO. EDC3-084981-25		PART NO. FX6-60S-0.8SV(71)			
SCALE 2 : 1		 HIROSE ELECTRIC CO., LTD		CODE NO. CL576-0105-9-71		1/1	
UNITS mm							

TO

F