

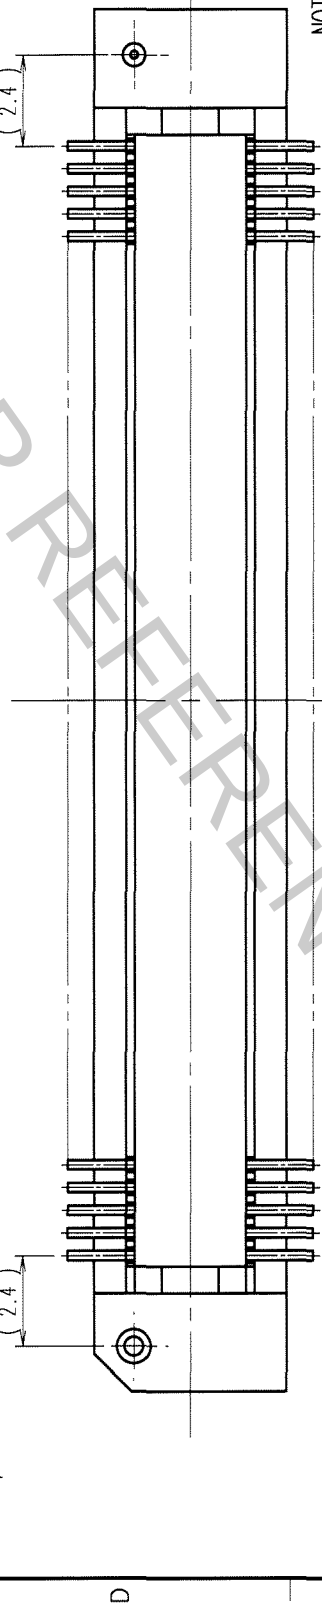
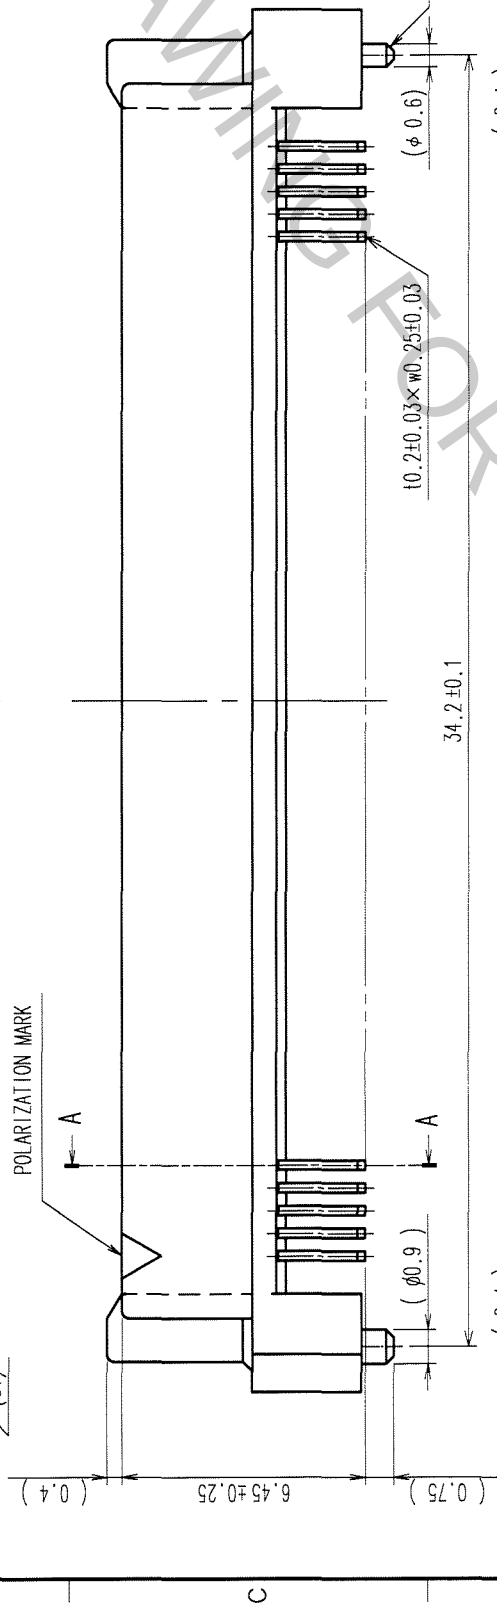
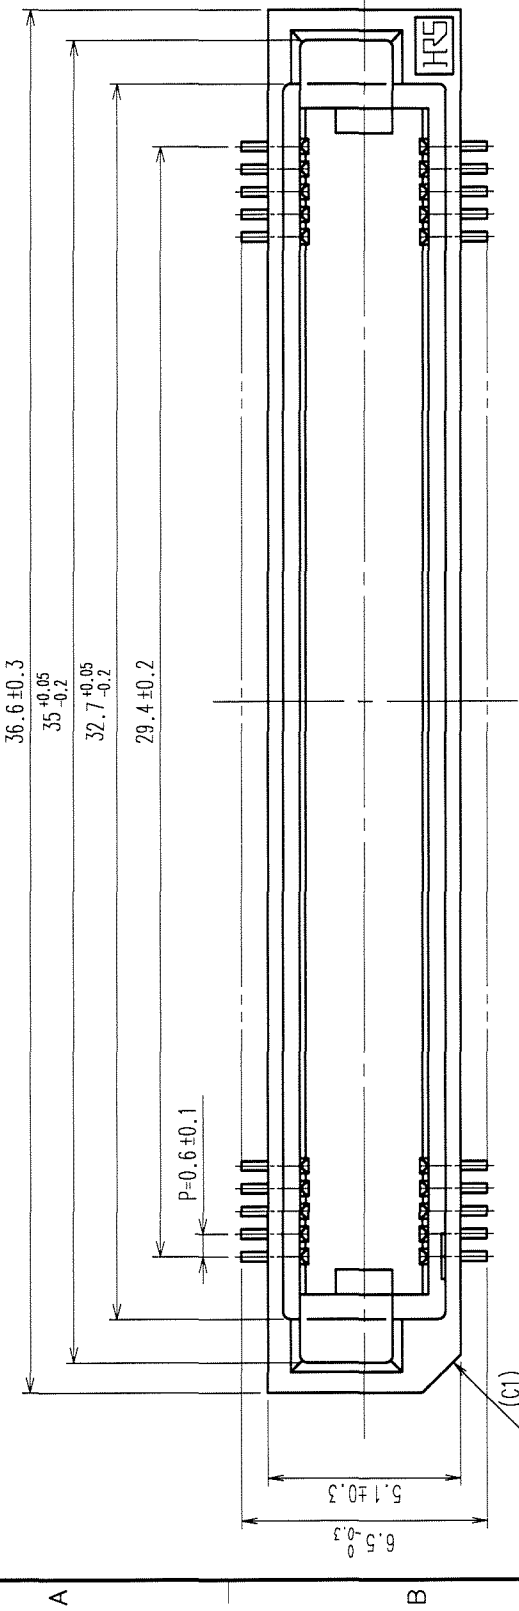


In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

1		2		3		4		5		6		7		8	
NO.		MATERIAL		FINISH, REMARKS		DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
1		PPS		LIGHT BROWN (UL94V-0)		2		PHOSPHOR BRONZE		CONTACT AREA: GOLD 0.1μm min.		LEAD AREA: TIN-PLATING 1μm min.		UNDER PLATING: NICKEL 1μm min.	
NO.		MATERIAL		FINISH, REMARKS		DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
CODE NO. (OLD)		CL				K. NAKAMURA		K. NAKAMURA		X. Uyama		H. Okawa			
SCALE		5 : 1				05.11.17		05.11.17		'05.11.17		'05.11.17			
UNITS		mm													

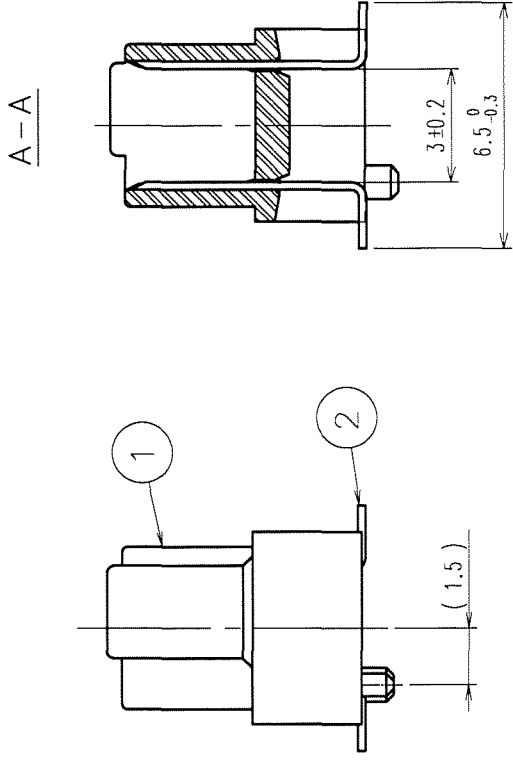

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE) (2:1)

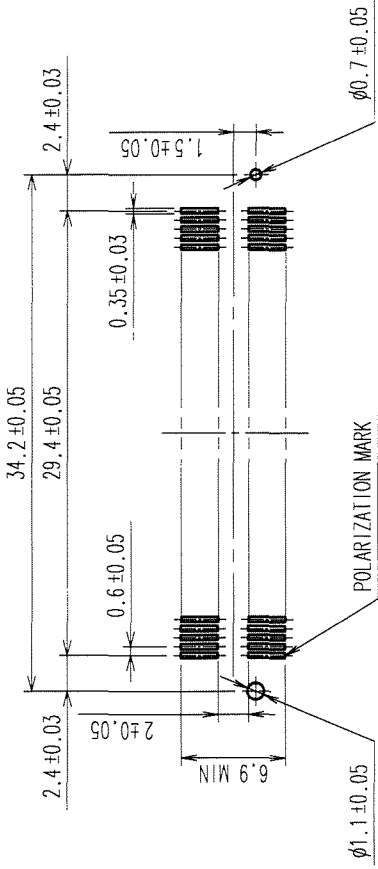

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO
PCK

DRAWING NO.		PART NO.	
EDC3-150843-25		FX8C-100P-SV2(71)	
SCALE		CODE NO.	
5 : 1		CL578-0545-4-71	
UNITS		1	
mm		1	