

PRO-SIGNAL



4Kx2K HDBit HDMI EXTENDER PSG3451

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Please read these instructions carefully before use and retain for future reference.

IMPORTANT SAFETY INFORMATION

When using electrical appliances basic safety precautions should always be followed.

- To prevent fire or shock hazard, do not expose this product to rain or moisture.
- Check that the power supply matches the mains voltage.
- Only use the power supply provided or one of identical specification.
- Ensure the IR remote extender cables are connected to the correct devices.
- Beware of static electricity which may damage the device. Use ESD precautions when installing.
- Do not plug or unplug cables while the devices are powered on.

WHAT'S INCLUDED

- HDMI Extender and Receiver
- 2 x Power Adapter 230VAC to 5VDC 2A
- Operation Manual
- IR remote extender
- IR remote receiver

FEATURES

- Supports resolution up to 4Kx2K@30Hz.
- Supports 1 to 1 and 1 to many.
- Transmission up to 120 metres.
- HDMI 1.4 and HDCP 1.4 compliant.

CAT CABLE REQUIREMENT

Follow the standard of IEEE-568B, It is recommended to select a high quality network cable with less loss and crosstalk.

- | | |
|----------------|---------------|
| 1 orange/white | 5 Blue/white |
| 2 orange | 6 Green |
| 3 Green/white | 7 Brown/white |
| 4 Blue | 8 Brown |




OVERVIEW

- This HDMI Extender allows a signal over a CAT6 up to 120 metres.
- IR passback with 20-60KHz frequency to control source device.


INSTALLATION

TRANSMITTER

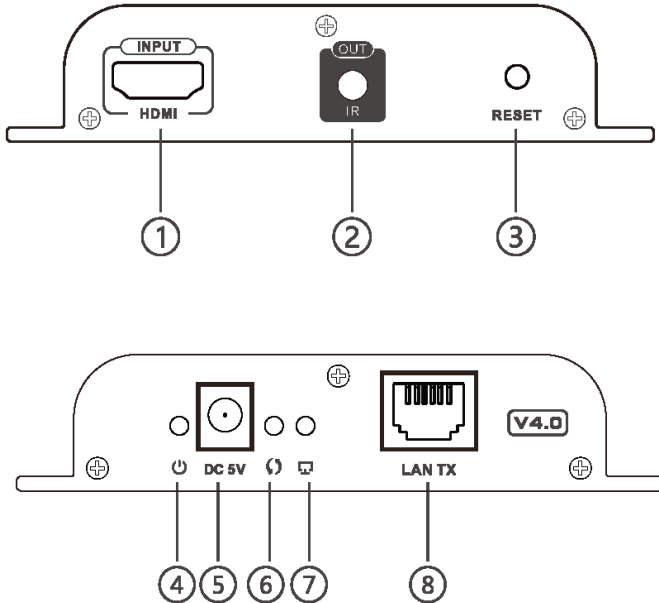

1. HDMI input - connect with source device.
2. IR extender emitter connection.
3. Reset button - press to reset the device.
4. Power LED - illuminates when power is on.
5. Power input - connect to PSU 5VDC output jack.
6. Data transmission LED - flashes when transmitting signal.
7. Connection indicator LED - illuminates to indicate connection to receiver is good.
8. CAT network cable RJ45 output socket.

RECEIVER

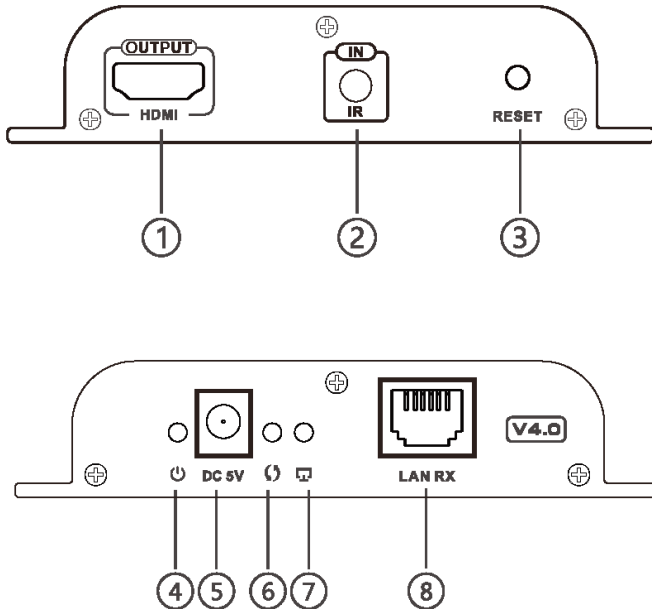


1. HDMI output - connect with destination device.
2. IR extender receiver connection
3. Reset button - press to reset the device.
4. Power LED - illuminates when power is on.
5. Power input - connect to PSU 5VDC output jack.
6. Data transmission LED - flashes when transmitting signal.
7. CAT network cable RJ45 input socket.


OPERATION

IR User Guide:


- IR receiver extension cable should be connected to the IR IN port of the receiver.
- The IR emitter extension cable should be connected to the IR OUT port of the transmitter.
- The emitter of the IR extension cable should face as close as possible to the IR receiving window of the source device.
- Face the receiving head of the IR receiver extension cable toward the user for unobstructed line of sight to the remote control.
- The IR receiver detects the users remote control and transmits the signal down the network cable to the IR emitter which replicates the IR output to control the source device.

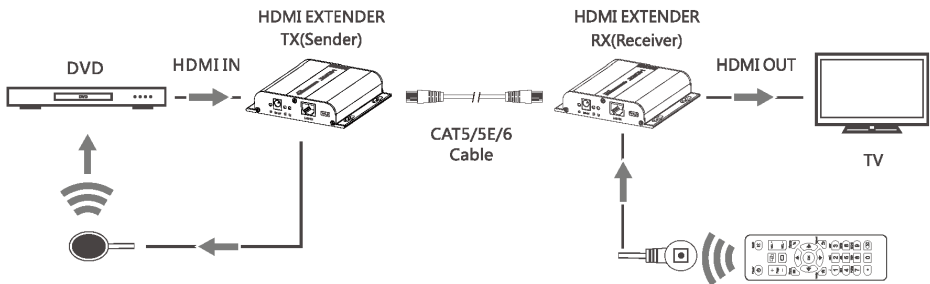

- One to one connection with IR remote up to 120 metres over HQ CAT6 cable.

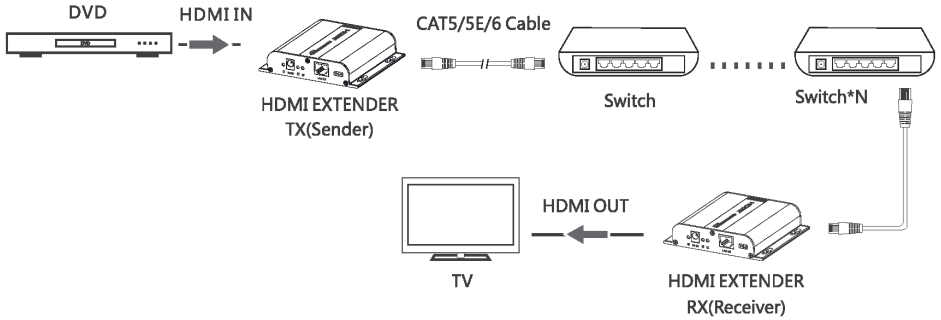

- LAN switch cascade by using the LAN switch/router to gain unlimited extension.

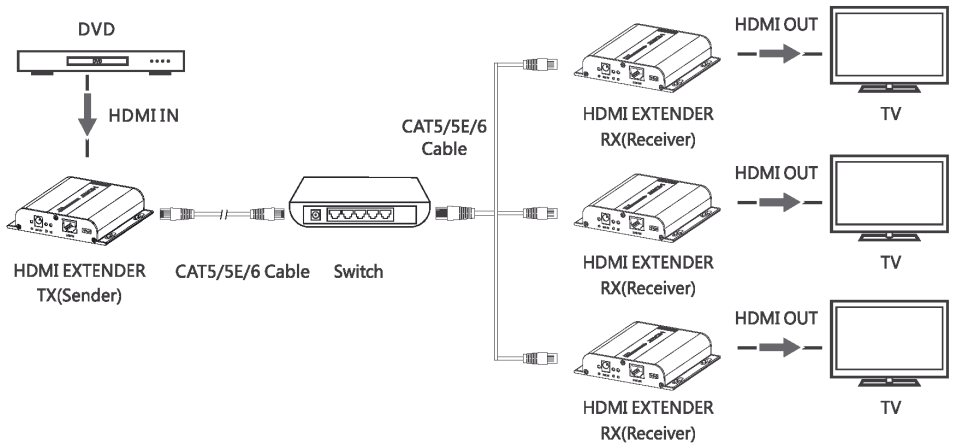

- One to many connection using router/switch over HQ CAT6 cable.

SPECIFICATIONS

Voltage/Current	DC 5V 2A
Power consumption	TX: <6W RX: <4W
HDMI compliance	HDMI 1.4
HDCP compliance	HDCP 1.4
HDMI input resolution	480i@60Hz, 480p@60Hz, 576i@50Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz, 4Kx2K@24/25/30Hz
Transmission length	CAT5 80m / CAT5E 100m / CAT6 120m
Input/output cable length	<5m (AWG24)
IR remote control	Supports IR passback with 20-60KHz frequency
Transfer method	Over UTP/STP CAT5/5e/6
Connector	RJ45
Working temperature	0~60°C
Storage temperature	-10~ 70°C
Humidity	0~90%RH (no condensation)
Dimension (RX & TX)	107.3(W) x 94(D) x 23.7(H)mm
Material	Alloy
Weight	TX: 170g RX: 167g

CLEANING & MAINTENANCE

Clean the outside casing with a soft cloth lightly moistened with mild soap and water. Never use any abrasive or solvents.

CPC Farnell declares that the radio equipment for wireless transmitter/receivers is in compliance with Radio Equipment Directive 2014/53/EU



INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT.

When this product has reached the end of its life it must be treated as Waste Electrical & Electronic Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Contact your local authority for details of recycling schemes in your area.

Made in China.
PO Box 13362 Dublin 2
PR2 9PP

Man Rev 1.0