


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case that the application demands a high level of reliability, such as automotive,  
please contact a company representative for further information.

1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
1	DIS-C-000585	T.K	E.K	07.07.27							

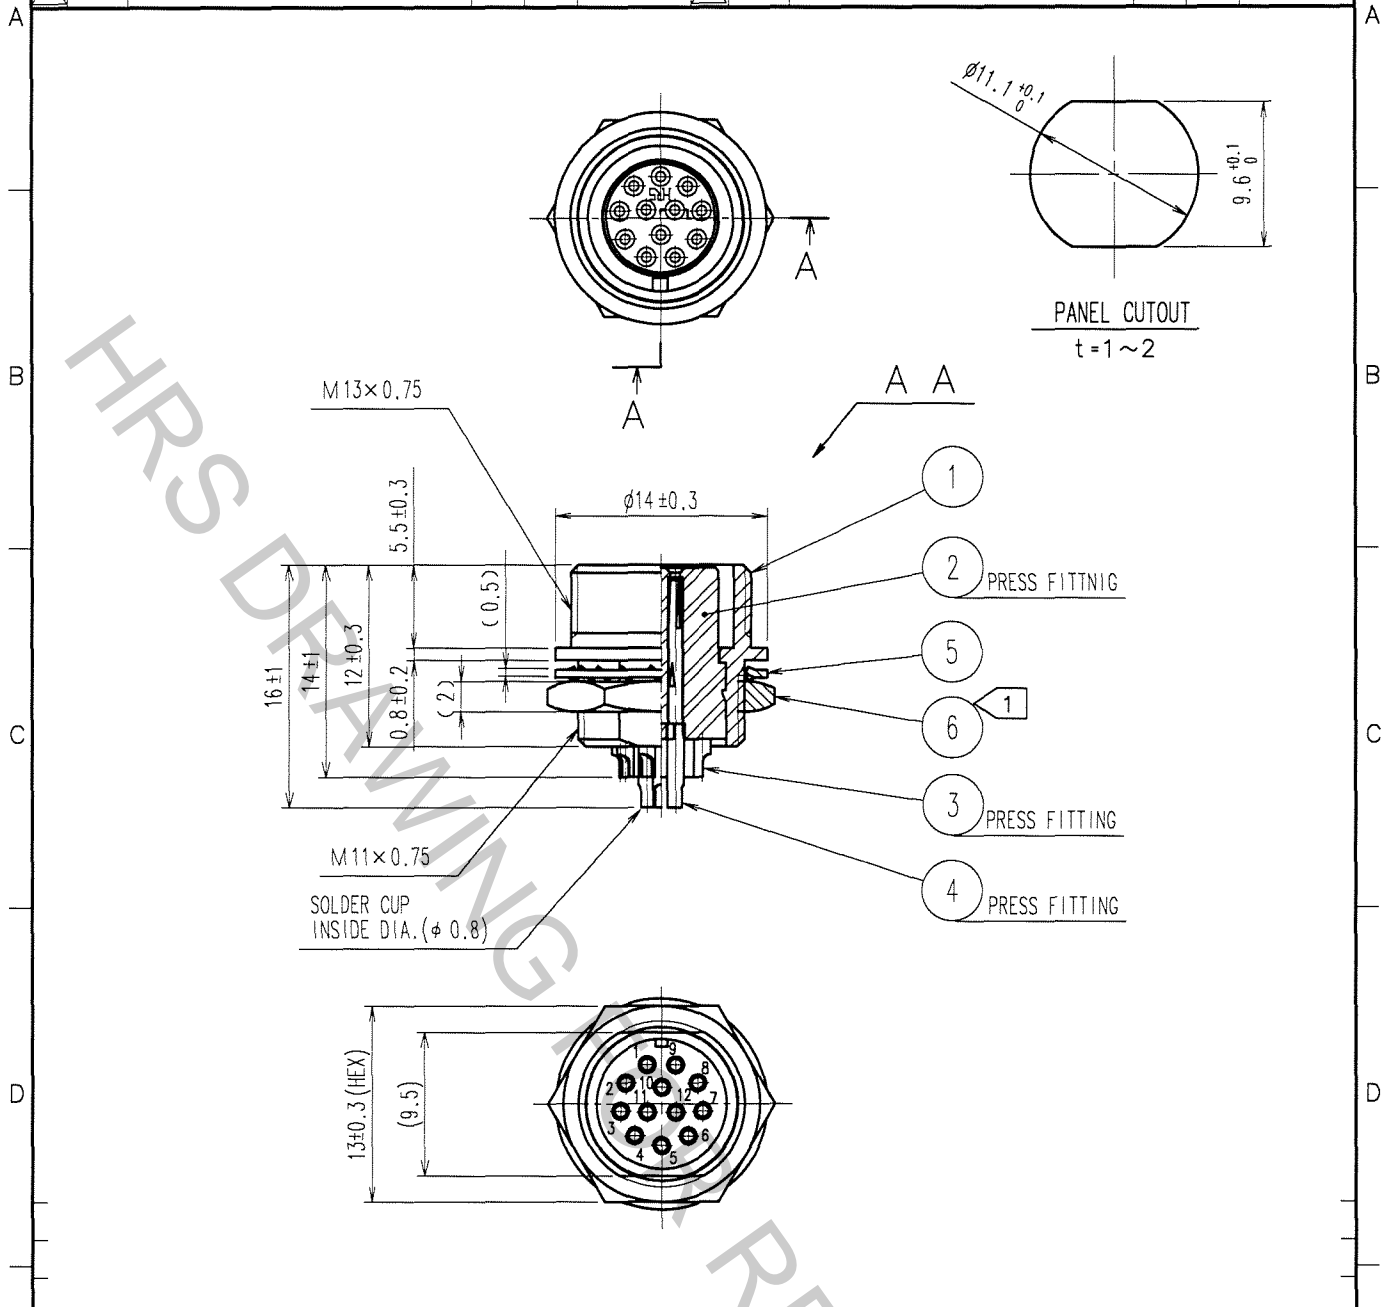

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑥ : 2N · m .  
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT  
REF. NO.⑥ FROM LOOSENING.

3	PHOSPHOR BRONZE	SILVER PLATING 2 μ m min.	6	BRASS	NICKEL PLATING
2	POLYAMIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING
1	BRASS	NICKEL PLATING	4	PHOSPHOR BRONZE	SILVER PLATING 2 μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN D.MATSUNE '05 10 01	DESIGNED D.MATSUNE '05 10 01	CHECKED E.KUNITI '05 10 13	APPROVED M.SATO '05 10 14	RELEASED
----------------------	---------------------------------	------------------------------------	----------------------------------	---------------------------------	----------

DRAWING NO. EDC4-042429-73	PART NO. HR10A-10TR-12S(73)
CODE NO. CL110-0453-0-73	