

3 In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.







COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△	△						△					
△	△						△					
△	△						△					

PRESS FITTING

1 2 3 4 5 6

A-A

M8.5×0.5

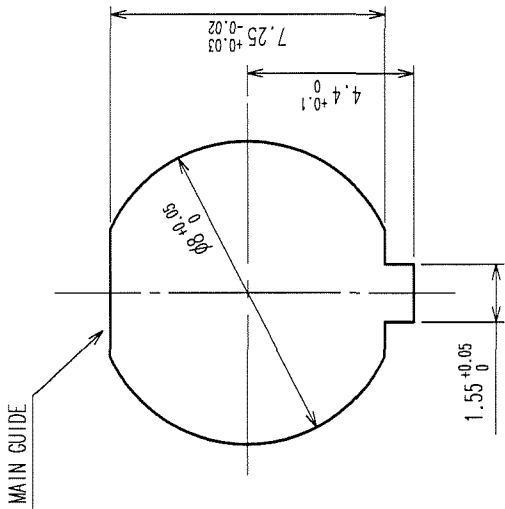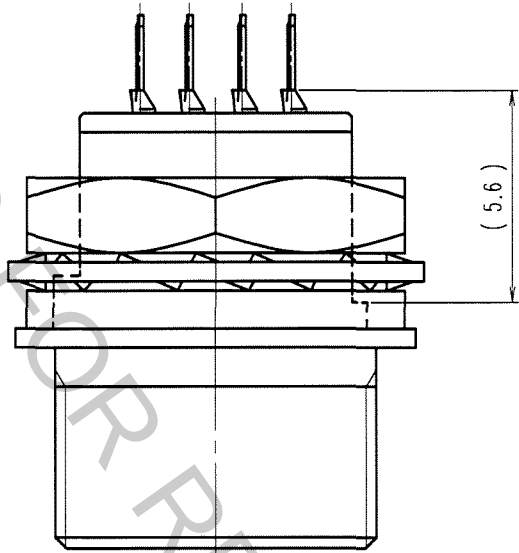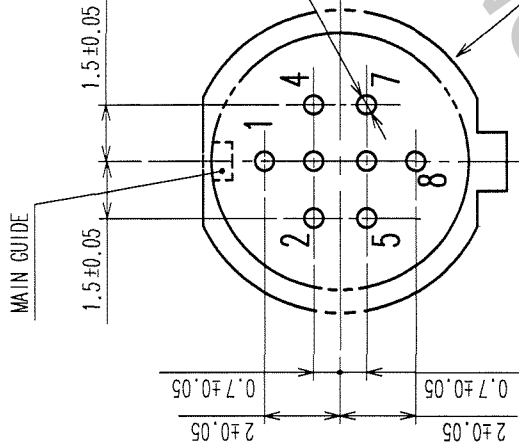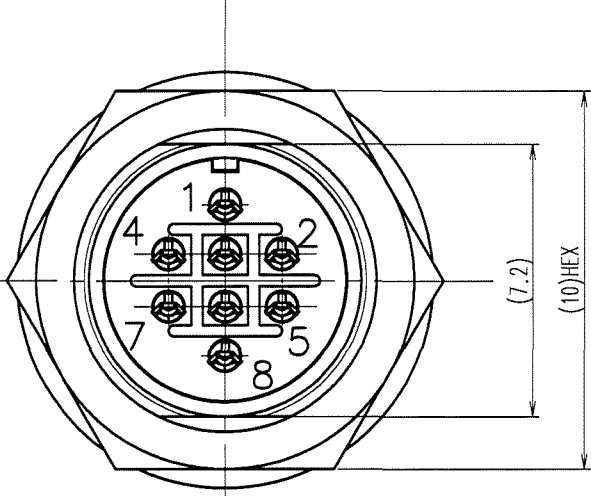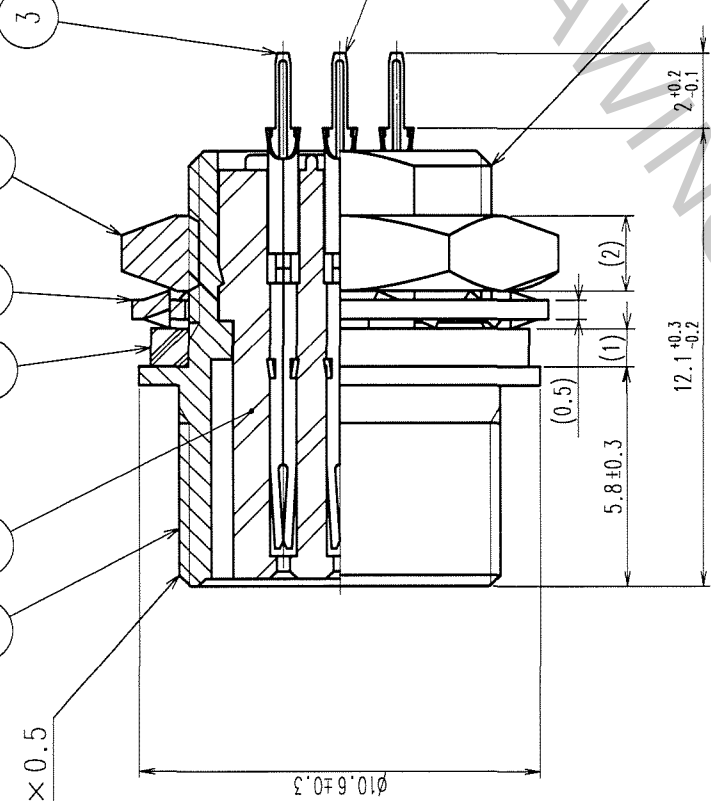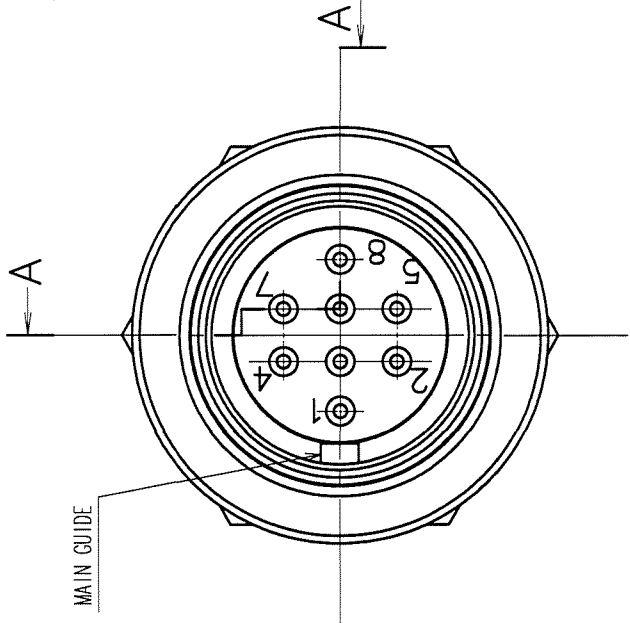

RECOMMENDED PC BOARD PATTERN FROM MATING FACE

WANPANEL CUTOUT
t: 0.7~2

NOTES 1> THE RECOMMENDED TIGHTENING TORQUE OF REF.No. ⑥ TO BE 1 N·m.
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS
RECOMMENDED TO PREVENT LOOSENESS.
2> CONTACT AREA : GOLD 0.2 μm min.
TERMINAL AREA : GOLD FLASH
UNDER PLATING : NICKEL 2 μm min.

3	PHOSPHOR BRONZE	2	ZINC ALLOY	6	ZINC ALLOY	NICKEL PLATING
2	PPS	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING	
1	ZINC ALLOY	NICKEL PLATING	4	EPDM	(BLACK)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H. Kawashima	H. Kawashima	T. Akagawa	M. Sato	
		05-11-21	05-11-21	05-11-25	05-11-30	

DRAWING NO.	PART NO.
EDC3-048665-73	HR25-7TR-8SA(73)

SCALE	UNITS	CODE NO.
5 : 1	mm	CL125-0023-0-73

HIROSE ELECTRIC CO., LTD.	CL125-0023-0-73
---------------------------	-----------------