


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case that the application demands a high level of reliability, such as automotive,  
please contact a company representative for further information.

TO  
R

A  
  
B  
  
C  
  
D  
  
E  
  
F

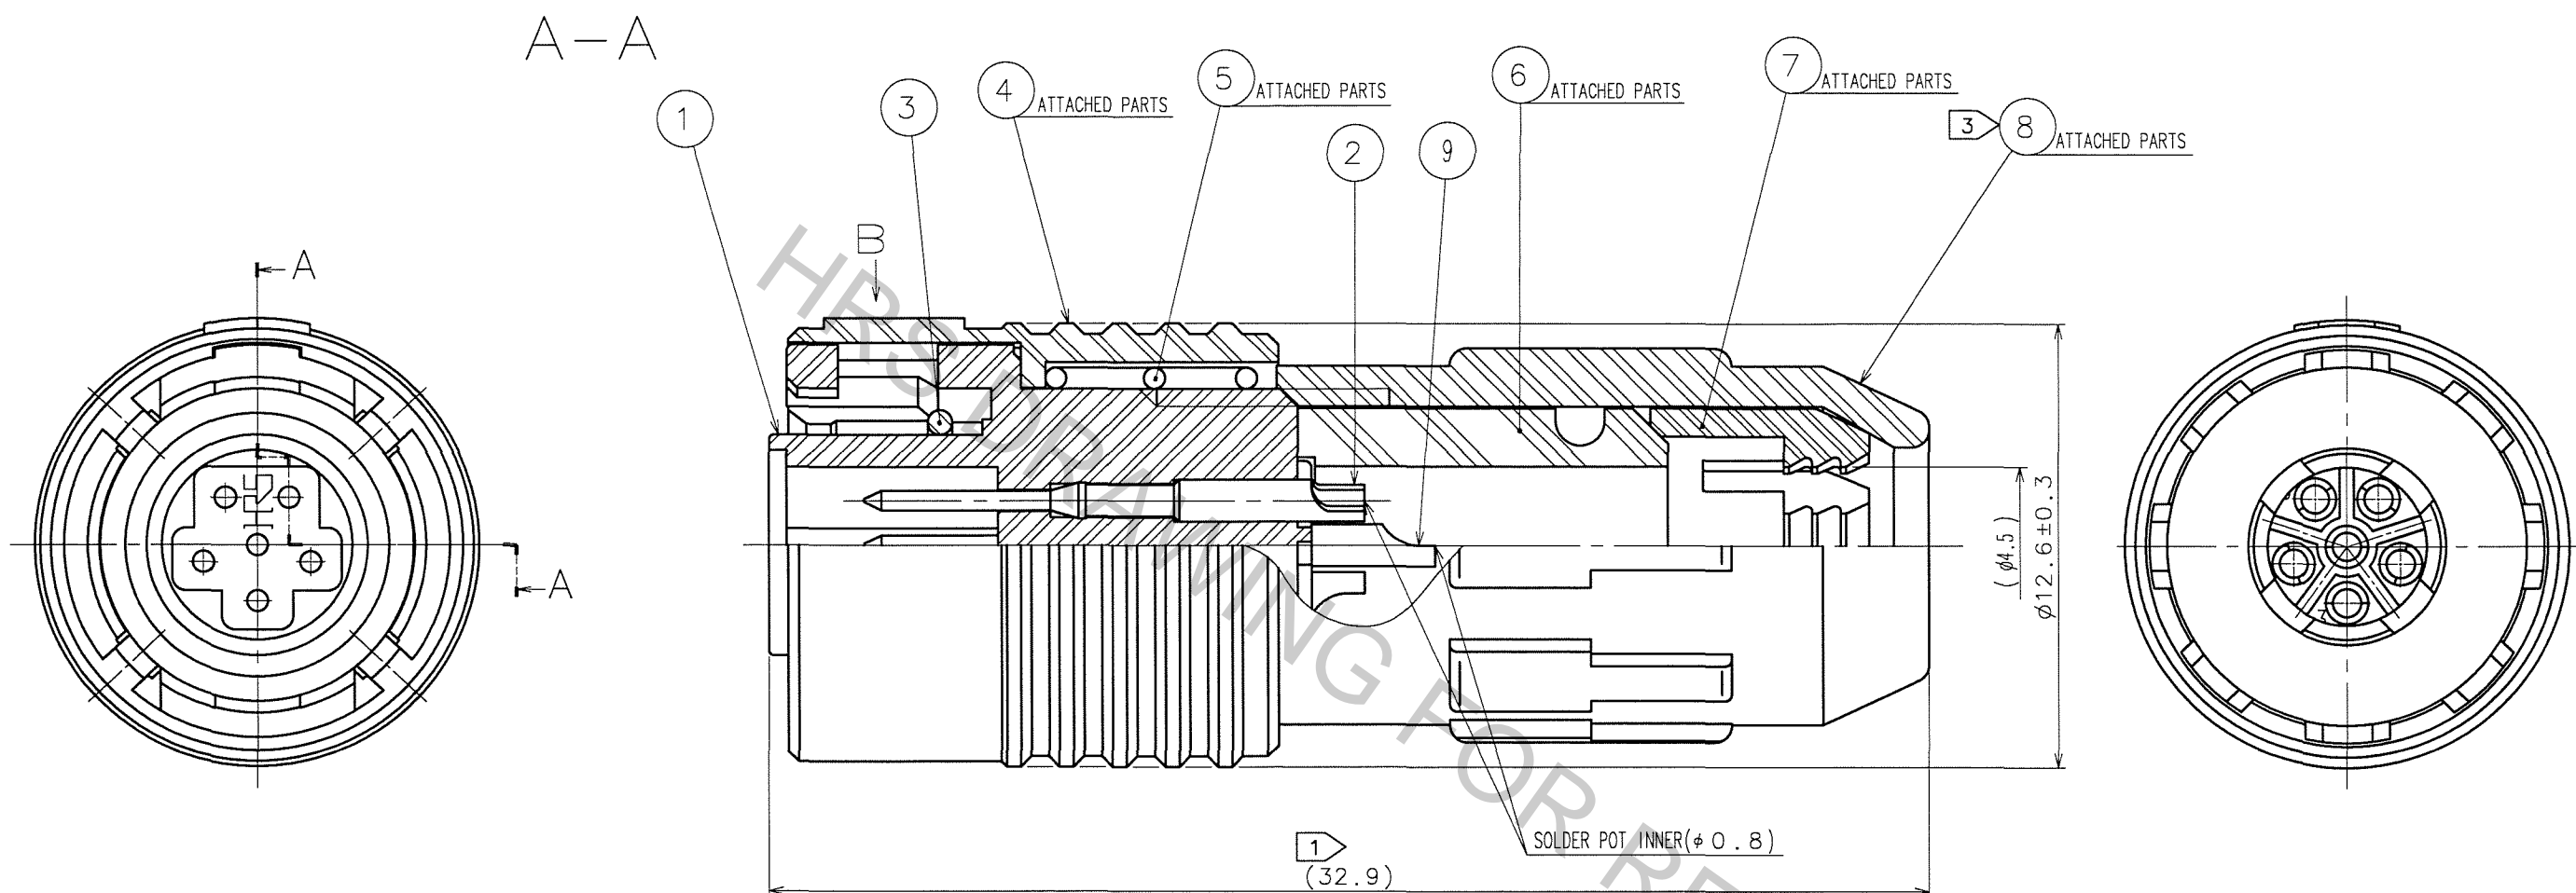

- NOTES
- 1 TOTAL LENGTH BECOMES 30.3±1 WHEN 8 IS SCREWED INTO 1 COMPLETERY.
  - 2 TABLE FOR ASSEMBLY AND SOLDERING IS AVAILABLE HR30-6P-6P-T01.
  - 3 THE RECOMMENDED CLAMP TORQUE OF REF. NO.8 TO BE 0.5N · m.  
SPACER FOR ASSEMBLY IS AVAILABLE HR30-6P-T02.
  - 4 SURFACE PLATING : GOLD PLATING 0.2μ m min.  
UNDER PLATING : NICKEL PLATING 2μ m min.
  - 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,  
DEPENDING ON THE CABLE STRUCTURE.  
PLEASE CONFIRM BEFORE THE USE.

5	STAINLESS STEEL				
4	PBT	(BLACK)	UL94V-0	9	BRASS
3	SIR	(RED)		8	PBT
2	BRASS	4		7	POLYACETAL
1	PPS	(BLACK)	UL94V-0	6	CR

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
-----	----------	-----------------	-----	----------	-----------------

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	E. KUNII	E. KUNII		M. SATO	
	'05.10.13	'05.10.13		'05.10.17	

DRAWING NO.	PART NO.
EDC3-112568-71	HR30-6PA-6P(71)
SCALE 5 : 1	CODE NO.
UNITS mm	CL130-0020-8-71
HRS HIROSE ELECTRIC CO., LTD	1/1

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000490	T.H.E.K		07.01.31					

A  
  
B  
  
C  
  
D  
  
E  
  
F