



EVQ4316A-R-01A

**45V, 6A, Low- I_Q , Synchronous Buck
Converter with Frequency Spread Spectrum
Evaluation Board, AEC-Q100 Qualified**

DESCRIPTION

The EVQ4316A-R-01A evaluation board is designed to demonstrate the capabilities of the MPQ4316A, a synchronous, step-down switching regulator with a configurable frequency and integrated, internal high-side MOSFET (HS-FET) and low-side MOSFET (LS-FET). It provides up to 6A of highly efficient output current (I_{OUT}), with current mode control for fast loop response.

The wide 3.3V to 45V input voltage (V_{IN}) range accommodates a variety of step-down applications in automotive input environments. A $1.7\mu A$ quiescent current (I_Q) in shutdown mode allows the device to be used in battery-

powered applications. High power conversion efficiency across a wide load range is achieved by scaling down the switching frequency (f_{SW}) under light-load conditions to reduce the switching and gate driver losses.

Frequency foldback helps prevent inductor current (I_L) runaway during start-up. Thermal shutdown provides reliable, fault-tolerant operation. A high duty cycle and low-dropout mode are provided for automotive cold crank conditions.

The EVQ4316A-R-01A is fully assembled and tested. The MPQ4316A is available in a QFN-20 (4mmx4mm) package with wettable flanks.

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ C$, unless otherwise noted.

Parameter	Condition	Value
Input voltage (V_{IN}) range		3.3V to 45V
Output voltage (V_{OUT})	$V_{IN} = 3.3V \text{ to } 45V, I_{OUT} = 0A \text{ to } 6A$	3.3V
Maximum output current (I_{OUT})	$V_{IN} = 3.3V \text{ to } 45V$	6A
Typical efficiency	$V_{IN} = 12V, V_{OUT} = 3.3V, I_{OUT} = 6A$	90.4%
Switching frequency (f_{SW})		410kHz

EVQ4316A-R-01A EVALUATION BOARD



LxWxH (8.3cmx8.3cmx1.3cm)

Board Number	MPS IC Number
EVQ4316A-R-01A	MPQ4316AGRE-AEC1

QUICK START GUIDE

1. Preset the power supply (V_{IN}) between 3.3V and 45V, then turn off the power supply. Electronic loads represent a negative impedance to the regulator, and setting a current too high can trigger hiccup mode.
2. If longer cables (>0.5m total) are used between the source and the evaluation board, install a damping capacitor at the input terminals, especially when $V_{IN} \geq 24V$.
3. Connect the power supply terminals to:
 - a. Positive (+): VEMI
 - b. Negative (-): GND
4. Connect the load terminals to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
5. After making the connections, turn on the power supply. The board should automatically start up.
6. To use the enable function, apply a digital input to the EN pin. Drive EN above 1V to turn on the regulator; drive EN below 0.85V to turn off the regulator.
7. The MPQ4316A's switching frequency (f_{SW}) can be configured by R3, the FREQ pin's resistor (R_{FREQ}). R3 can be estimated based on the relationship between f_{SW} and R_{FREQ} (see Figure 1).

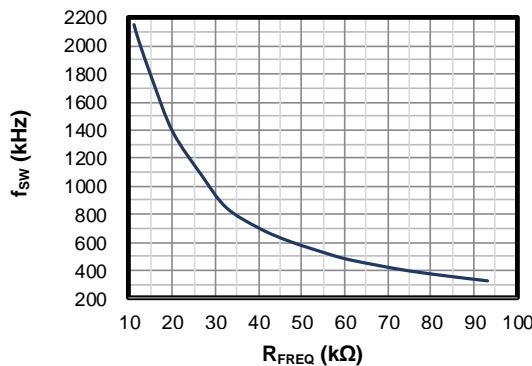


Figure 1: f_{SW} vs. R_{FREQ}

8. To use the sync function, apply a 350kHz to 1000kHz external clock to the SYNCIN pin to synchronize the internal clock's rising edge.
9. The output voltage (V_{OUT}) is set by the external resistor divider. If $R7 = 100\text{k}\Omega$, then R8 can be calculated with Equation (1):

$$R8 = \frac{R7}{\frac{V_{OUT}}{0.815V} - 1} \quad (1)$$

Table 1 shows the recommended R7 and R8 values for common V_{OUT} values.

Table 1: Resistor Selection for Output Voltages

V_{OUT} (V)	R7 (kΩ)	R8 (kΩ)
3.3	100 (1%)	32.4 (1%)
5	100 (1%)	19.1 (1%)

Figure 2 shows the measurement equipment set-up.

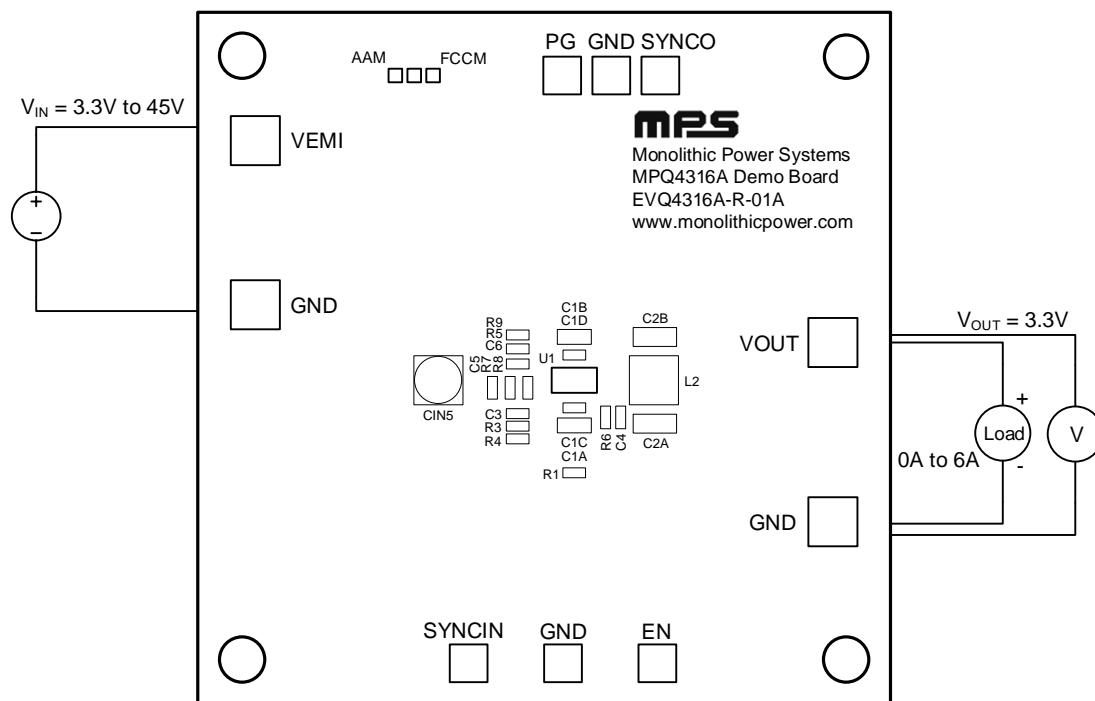


Figure 2: Measurement Equipment Set-Up

EVALUATION BOARD SCHEMATIC


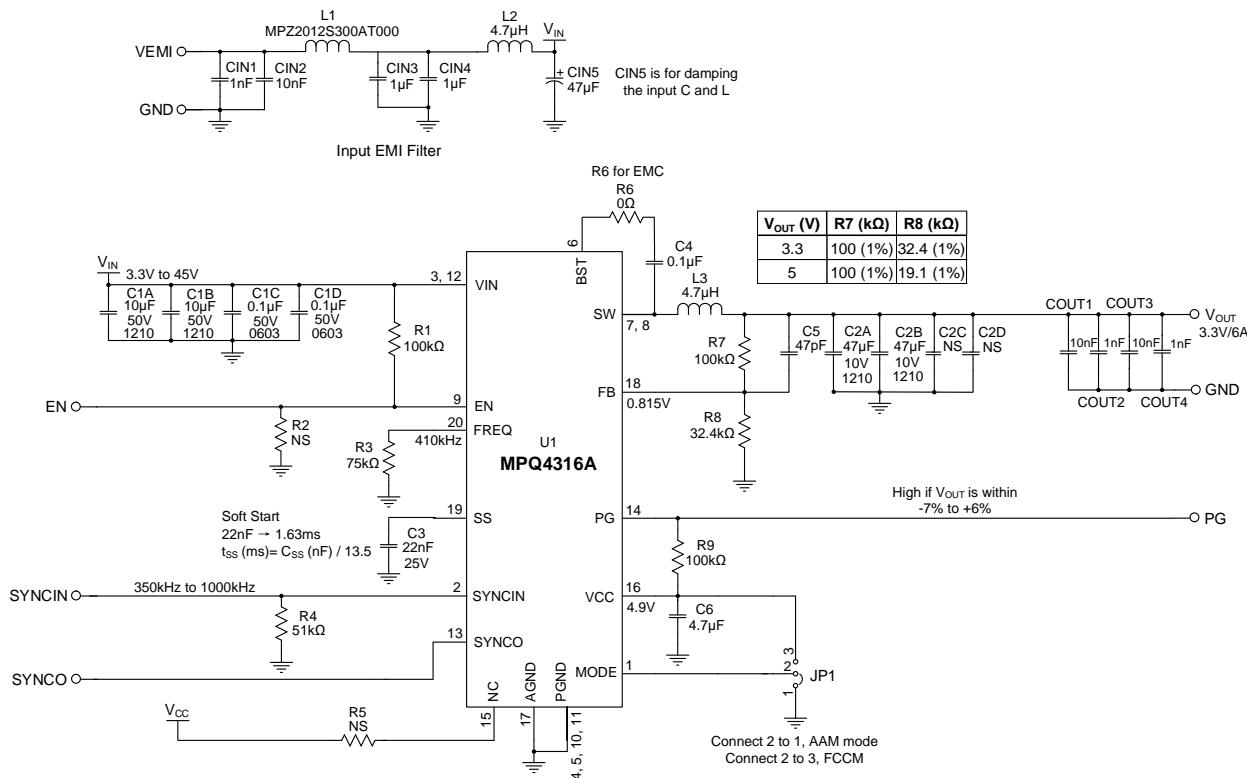


Figure 3: Evaluation Board Schematic

PACKAGE REFERENCE

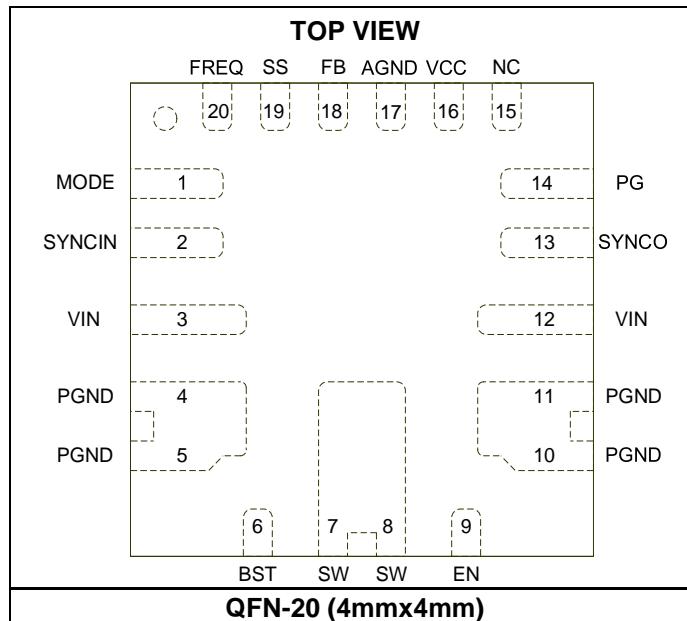

EVQ4316A-R-01A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
3	CIN1, COUT2, COUT4	1nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM216R71H102KA01
3	CIN2, COUT1, COUT3	10nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H103KA01D
2	CIN3, CIN4	1µF	Ceramic capacitor, 50V, X7R	1206	Wurth	885012208093
1	CIN5	47µF	Aluminum capacitor, 63V	SMD	Panasonic	EEHZA1J470P
2	C1A, C1B	10µF	Ceramic capacitor, 50V, X7R	1210	Murata	GRM32ER71H106KA12L
2	C1C, C1D	0.1µF	Ceramic capacitor, 50V, X7R	0603	Murata	GCJ188R71H104KA12D
2	C2A, C2B	47µF	Ceramic capacitor, 10V, X5R	1210	Murata	GRM32ER61A476KE20L
1	C3	22nF	Ceramic capacitor, 25V, X7R	0603	Murata	GRM188R71E223JA01D
1	C4	0.1µF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H104KA93D
1	C5	47pF	Ceramic capacitor, 50V, C0G	0603	Murata	GRM1885C1H470JA01D
1	C6	4.7µF	Ceramic capacitor, 10V, X5R	0603	Murata	GRM188R61A475KE15D
1	L1	10mΩ	Magnetic bead, 6A	0805	TDK	MPZ2012S300AT000
1	L2	4.7µH	Inductor, 31.5mΩ, 6A	SMD	Cyntec	VCMT063T-4R7MN5TM
1	L3	4.7µH	Inductor, 15.02mΩ, 12.1A	SMD	Coilcraft	XAL6060-472MEC
3	R1, R7, R9	100kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07100KL
1	R3	75kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0775KL
1	R4	51kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0751KL
1	R6	0Ω	Film resistor, 1%	0603	Yageo	RC0603FR-070RL
1	R8	32.4kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0732K4L
4	C2C, C2D, R2, R5	NS				
1	JP1	2.54mm	Test pin, 3-pin	DIP	Any	
4	VEMI, GND, VOUT, GND	2mm	Golden pin	DIP	Custom ⁽¹⁾	
7	SYNCIN, ICS, PG, SYNC0, EN, GND, GND	1mm	Golden pin	DIP	Custom ⁽¹⁾	
1	U1	MPQ4316A	45V, 6A, step-down converter, AEC-Q100	QFN-20 (4mmx 4mm)	MPS	MPQ4316AGRE-AEC1

Note:


- 1) Contact an MPS FAE for more information regarding custom pins.

EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{sw} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Input Current vs. Load Current

AAM mode, $V_{OUT} = 3.3V$

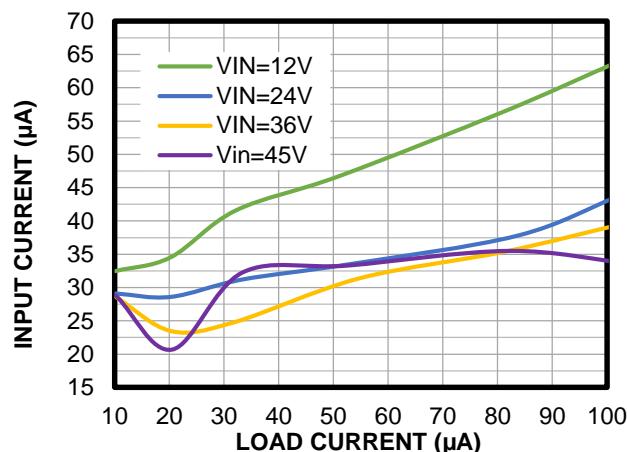


Input Current vs. Load Current

AAM mode, $V_{OUT} = 5V$

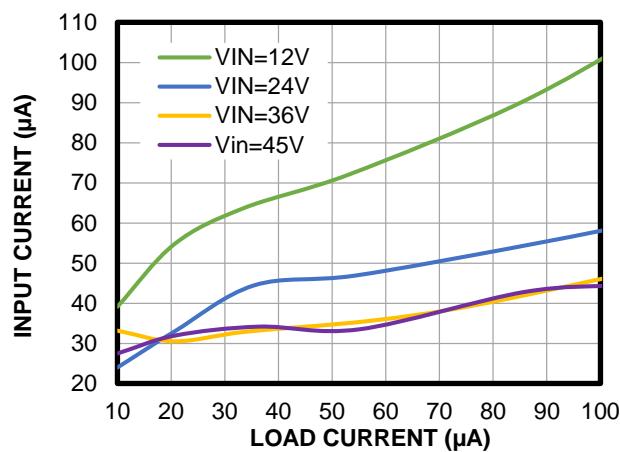


Efficiency vs. Load Current

AAM mode, $V_{OUT} = 3.3V$, 0.1mA to 10mA

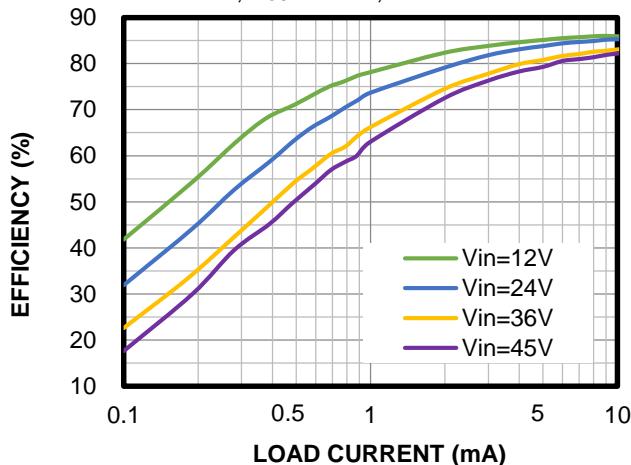


Efficiency vs. Load Current

AAM mode, $V_{OUT} = 3.3V$, 10mA to 1000mA

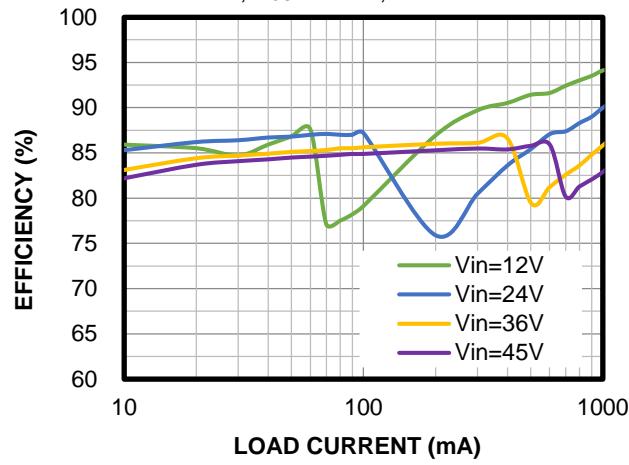


Efficiency vs. Load Current

AAM mode, $V_{OUT} = 3.3V$, 1A to 6A

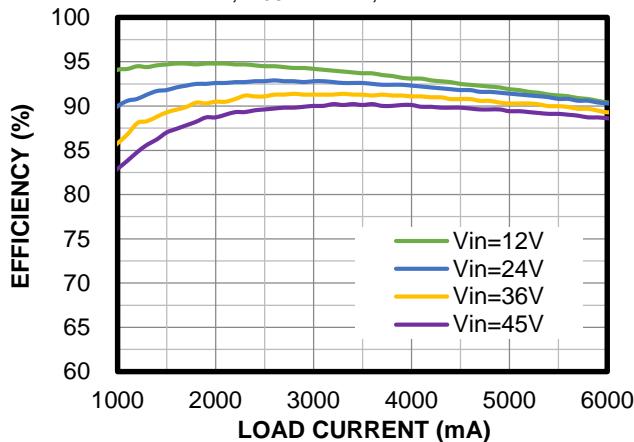







Efficiency vs. Load Current

FCCM, $V_{OUT} = 3.3V$, 0.1mA to 10mA

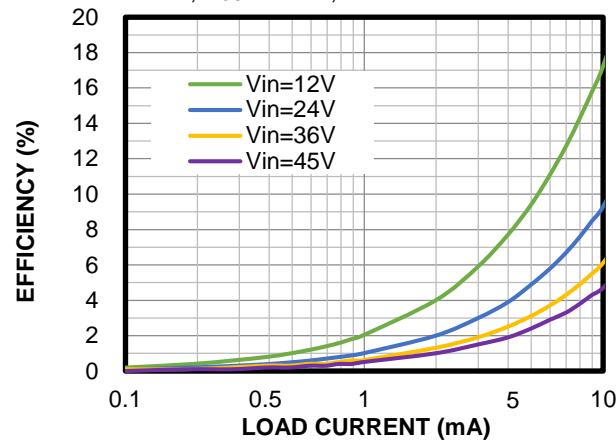

EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{sw} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.

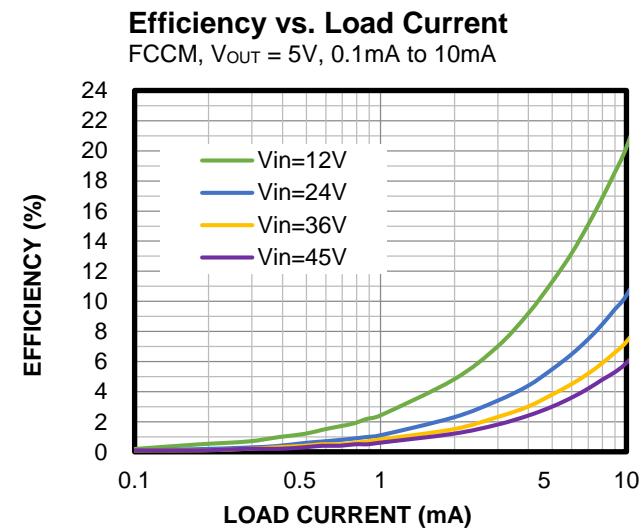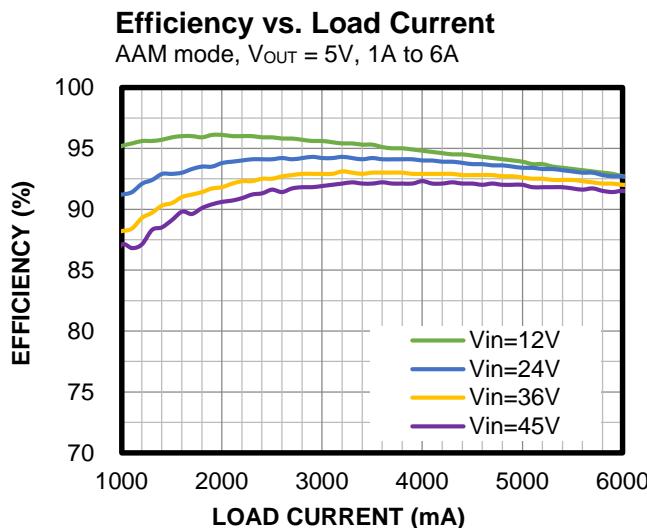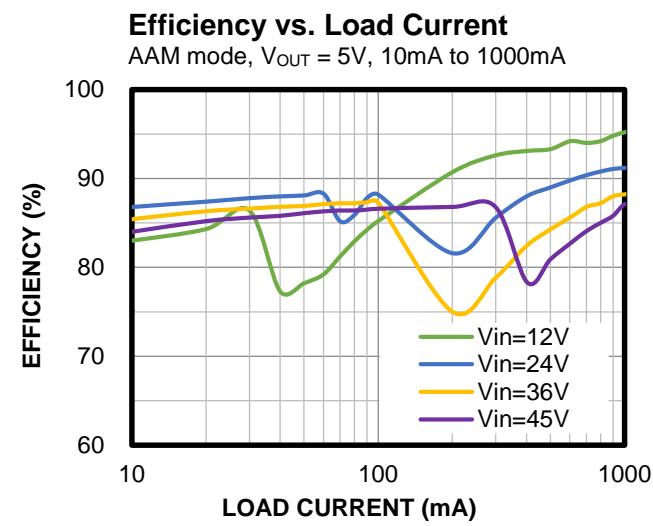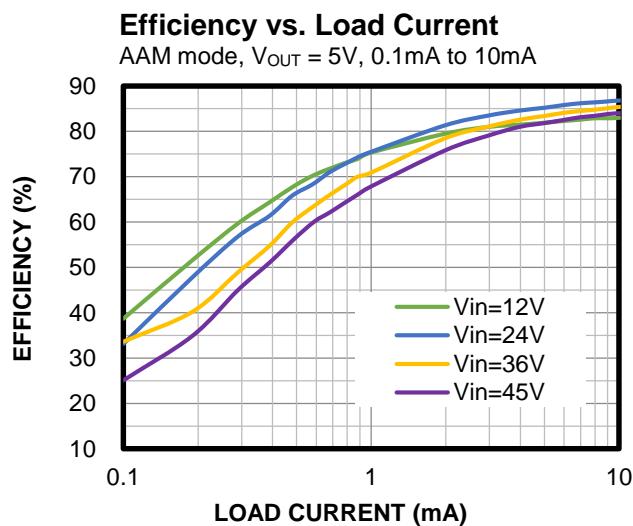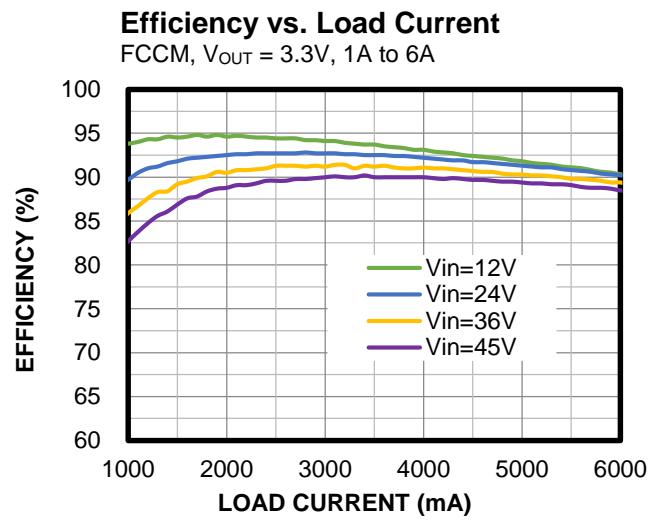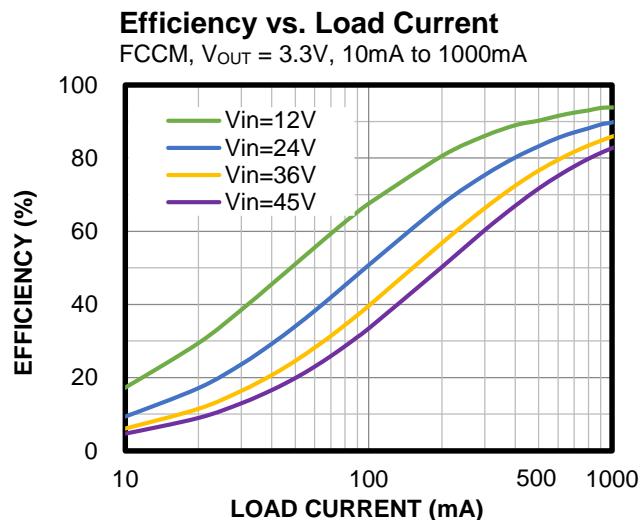


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{sw} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Load Current

FCCM, $V_{OUT} = 5V$, 10mA to 1000mA

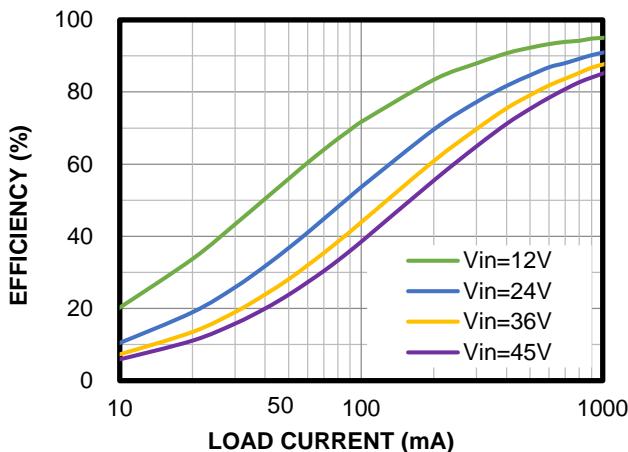


Efficiency vs. Load Current

FCCM, $V_{OUT} = 5V$, 1A to 6A

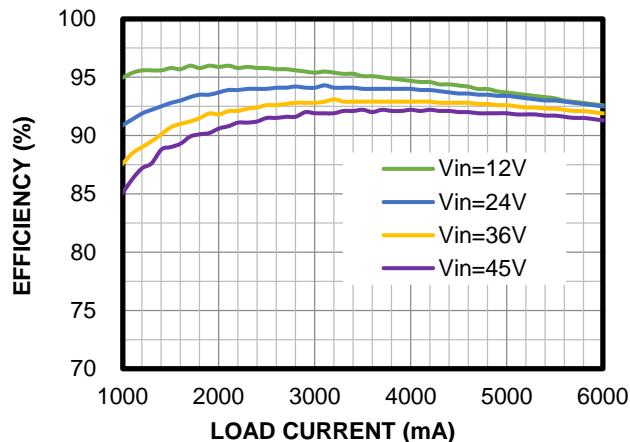


Load Regulation

$V_{OUT} = 3.3V$, AAM mode

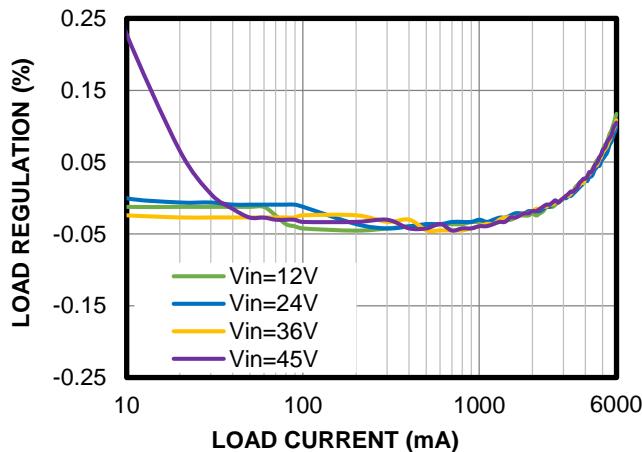


Load Regulation

$V_{OUT} = 3.3V$, FCCM

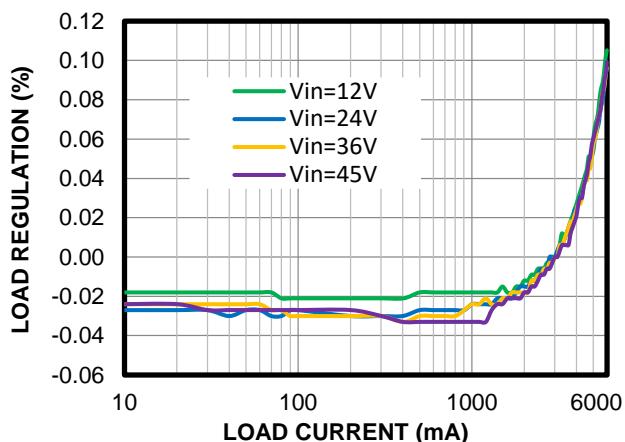


Line Regulation

$V_{OUT} = 3.3V$, AAM mode

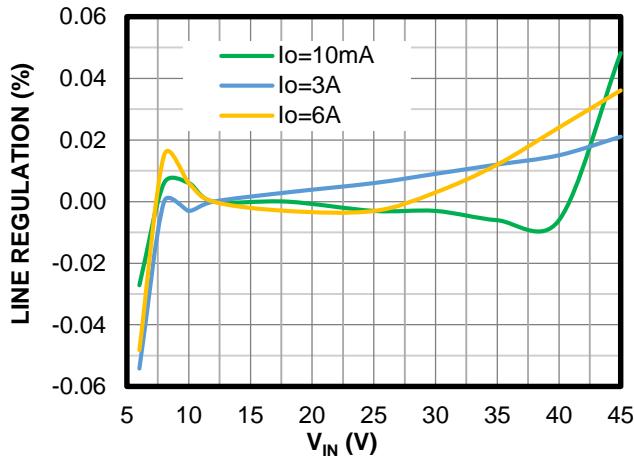







Line Regulation

$V_{OUT} = 3.3V$, FCCM

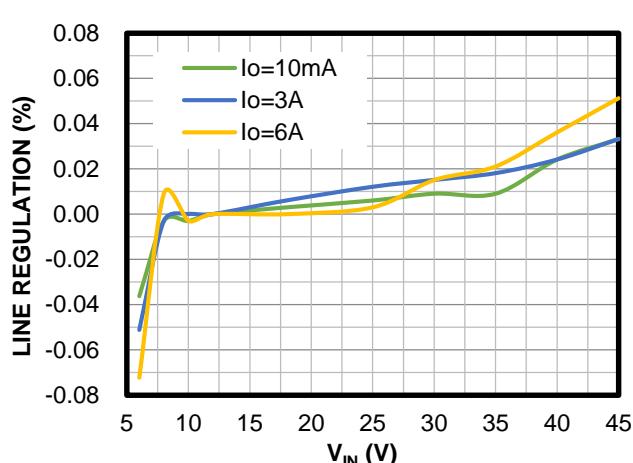

EVB TEST RESULTS (*continued*)


Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{sw} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.

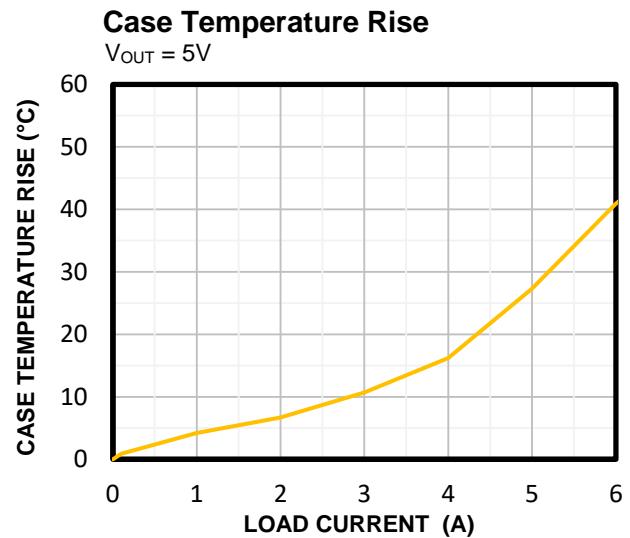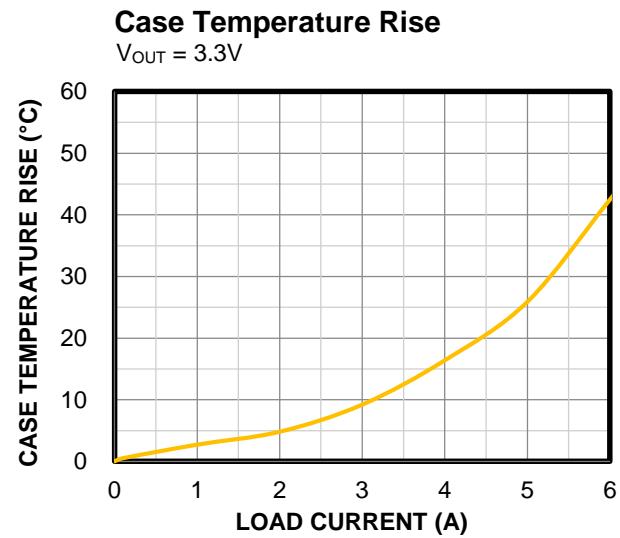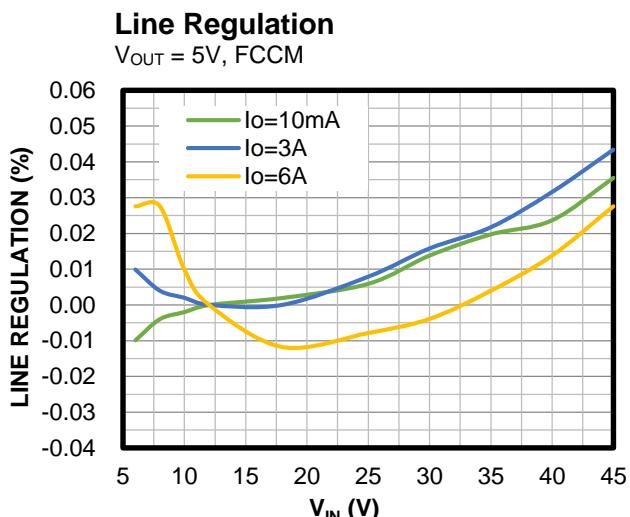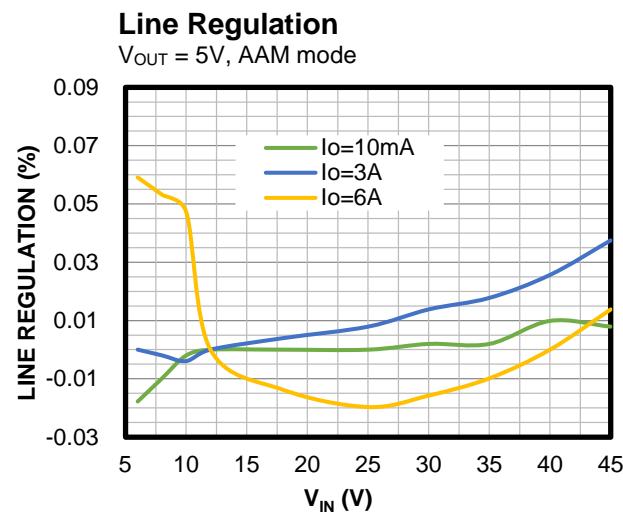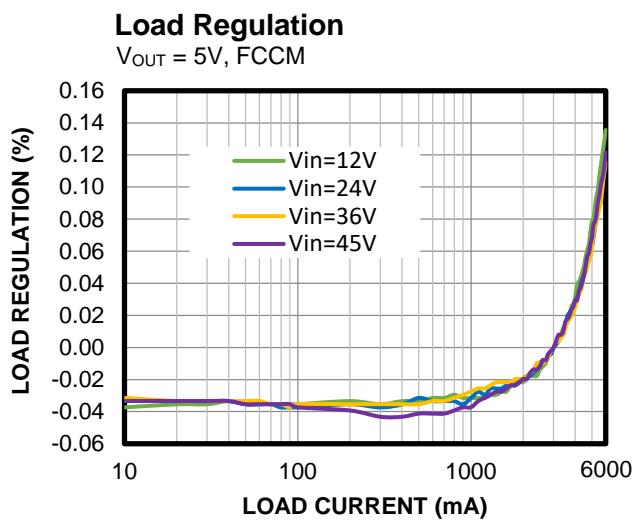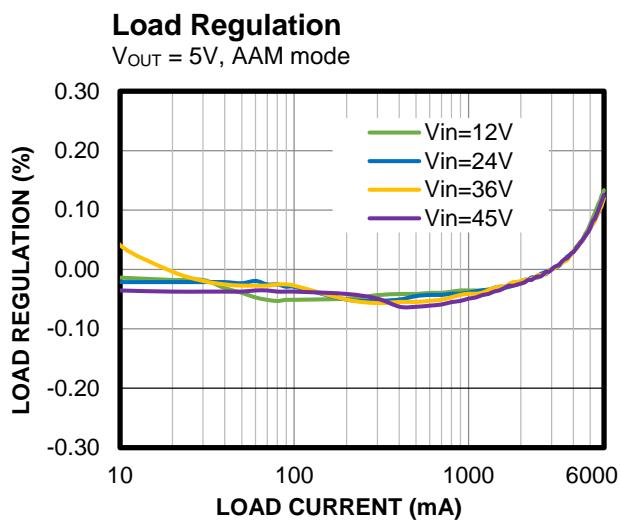

EVB TEST RESULTS (*continued*)


Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.

f_{SW} vs. V_{IN}

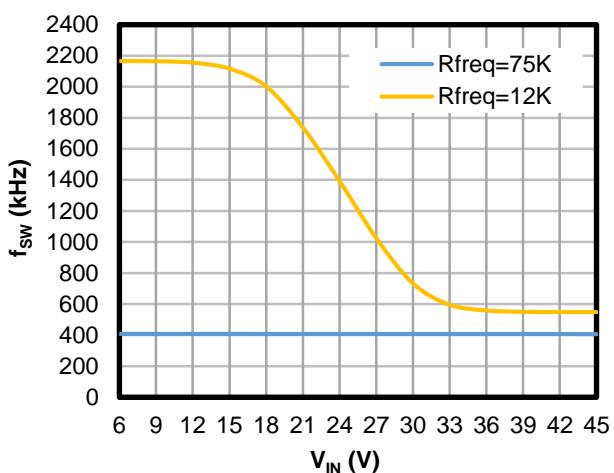

Low-Dropout Mode

$V_{OUT} = 5V$

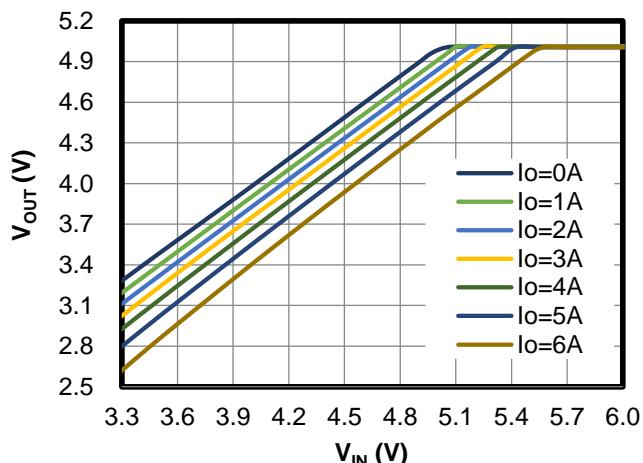


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


CISPR25 Class 5 Peak Conducted Emissions

150kHz to 108MHz

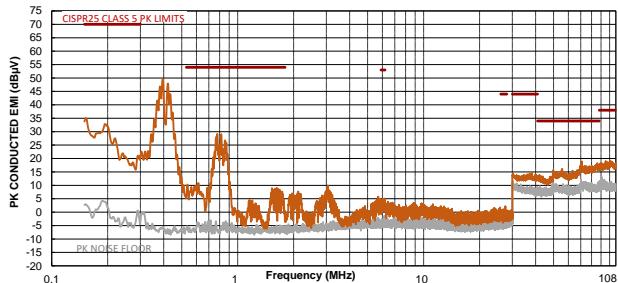


CISPR25 Class 5 Peak Radiated Emissions

150kHz to 30MHz

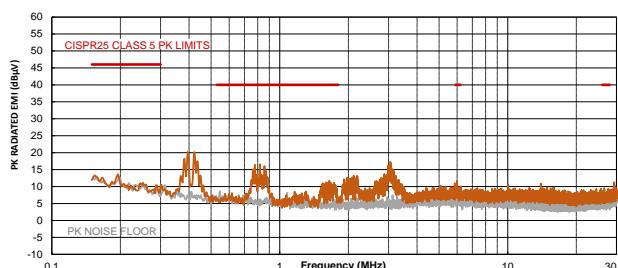


CISPR25 Class 5 Peak Radiated Emissions

Horizontal, 30MHz to 1GHz

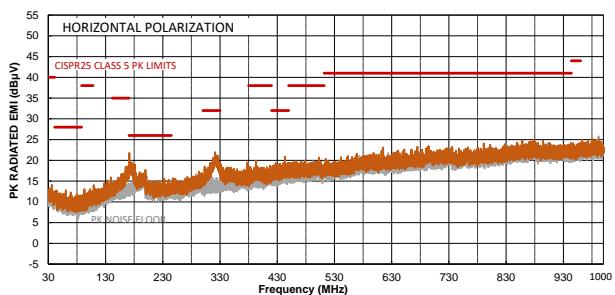


CISPR25 Class 5 Average Conducted Emissions

150kHz to 108MHz

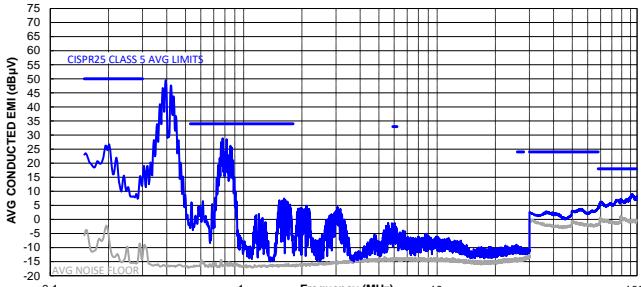


CISPR25 Class 5 Average Radiated Emissions

150kHz to 30MHz

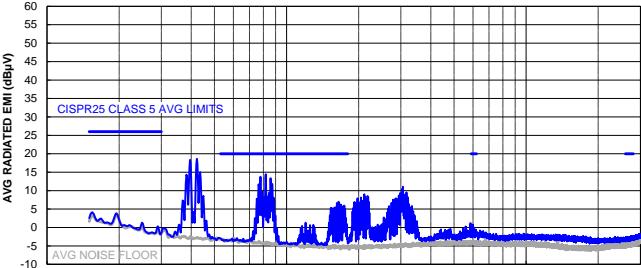

CISPR25 Class 5 Average Radiated Emissions

Horizontal, 30MHz to 1GHz

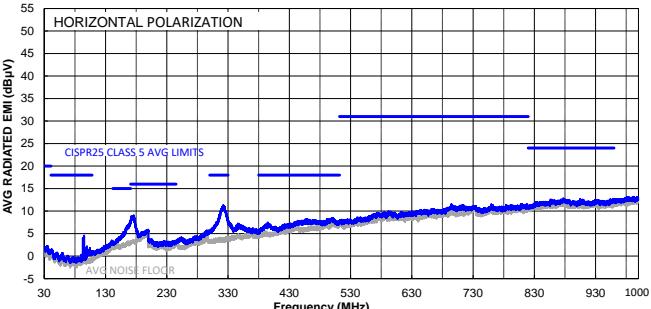


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410\text{kHz}$, $T_A = 25^\circ C$, unless otherwise noted.


CISPR25 Class 5 Peak Radiated Emissions

Vertical, 30MHz to 1GHz

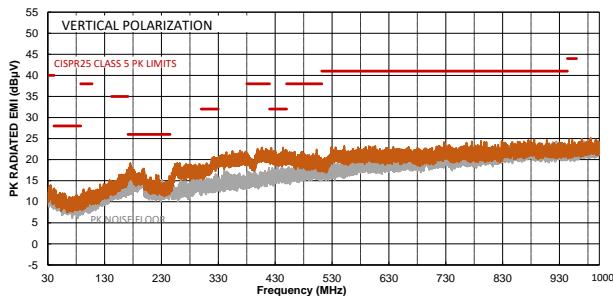

CISPR25 Class 5 Average Radiated Emissions

Vertical, 30MHz to 1GHz

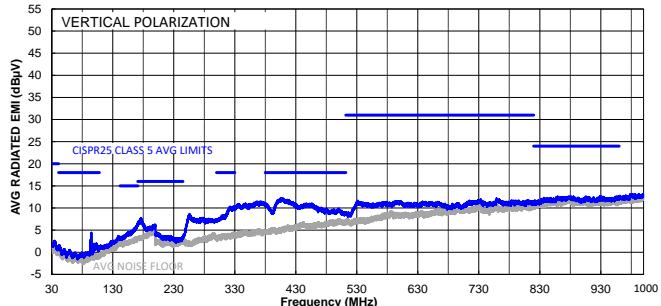


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{sw} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Steady State

$I_{OUT} = 0A$, AAM mode

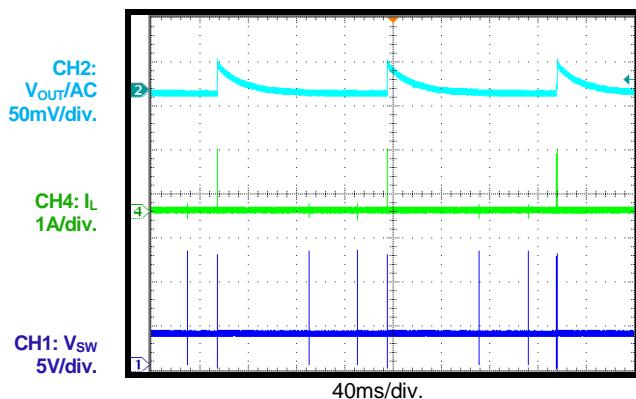


Steady State

$I_{OUT} = 0A$, FCCM

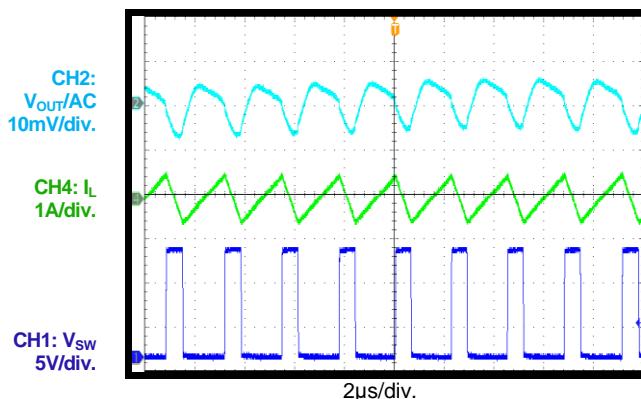


Steady State

$I_{OUT} = 6A$

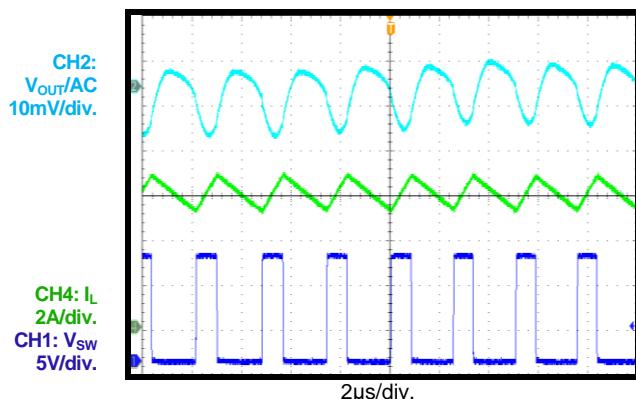


Start-Up through VIN

$I_{OUT} = 0A$, AAM mode

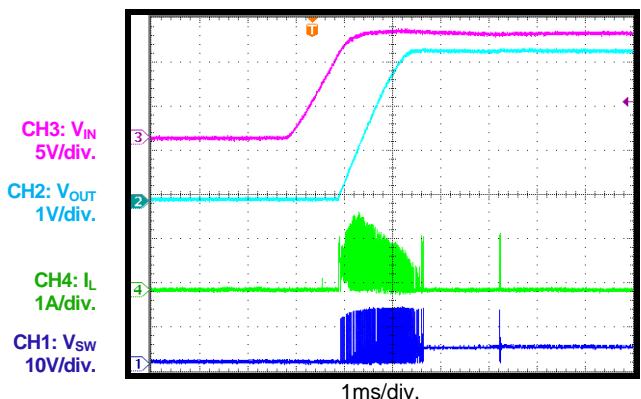


Start-Up through VIN

$I_{OUT} = 0A$, FCCM

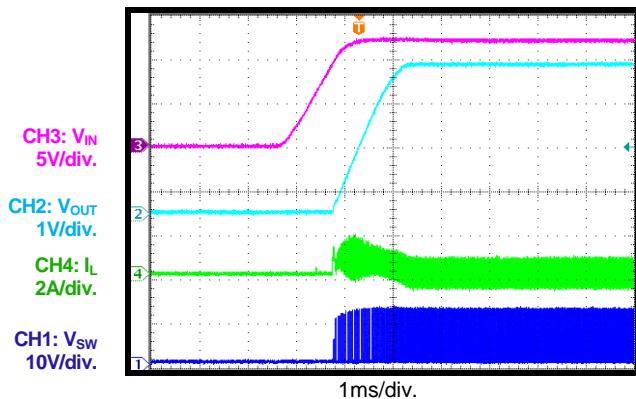

Start-Up through VIN

$I_{OUT} = 6A$

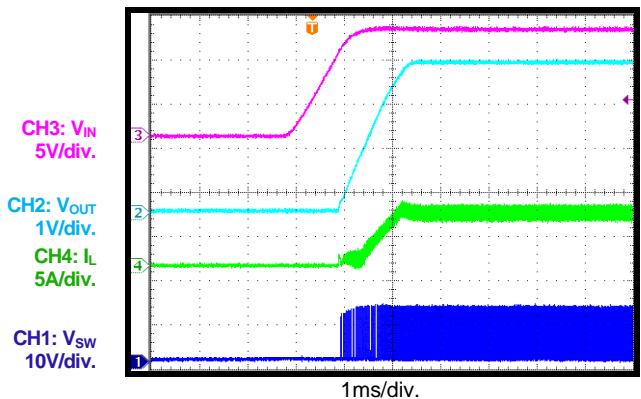


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board, $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Shutdown through VIN

$I_{OUT} = 0A$, AAM mode

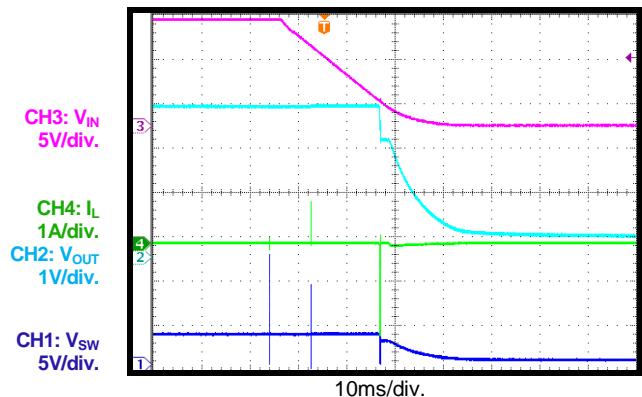


Shutdown through VIN

$I_{OUT} = 0A$, FCCM

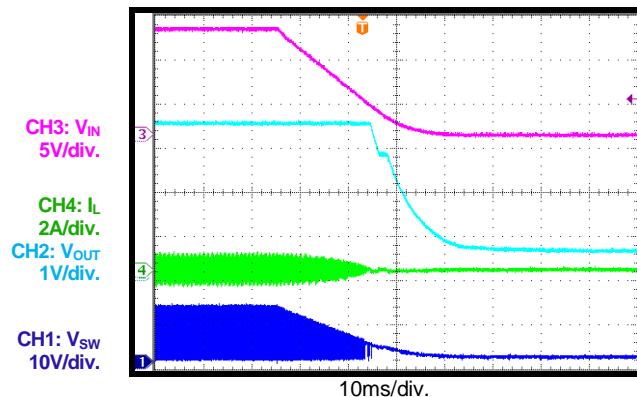


Shutdown through VIN

$I_{OUT} = 6A$

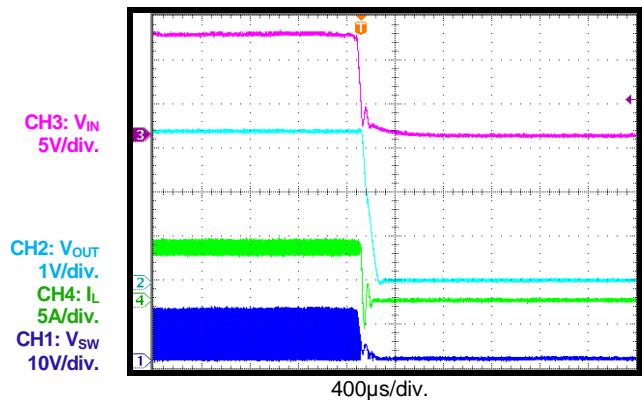


Start-Up through EN

$I_{OUT} = 0A$, AAM mode

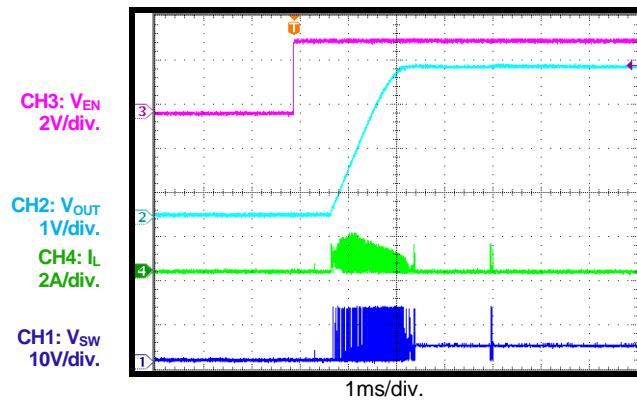


Start-Up through EN

$I_{OUT} = 0A$, FCCM

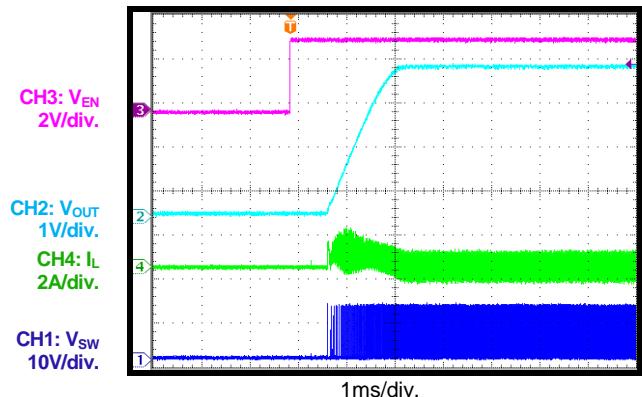

Start-Up through EN

$I_{OUT} = 6A$

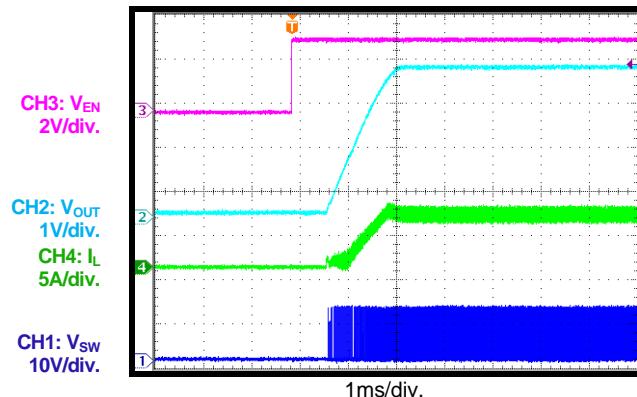


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board, $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Shutdown through EN

$I_{OUT} = 0A$, AAM mode

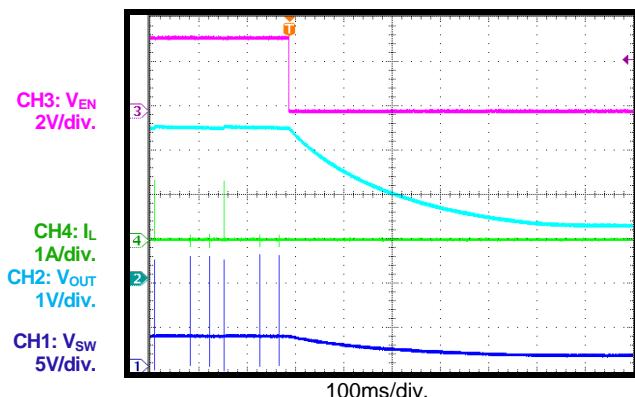


Shutdown through EN

$I_{OUT} = 0A$, FCCM

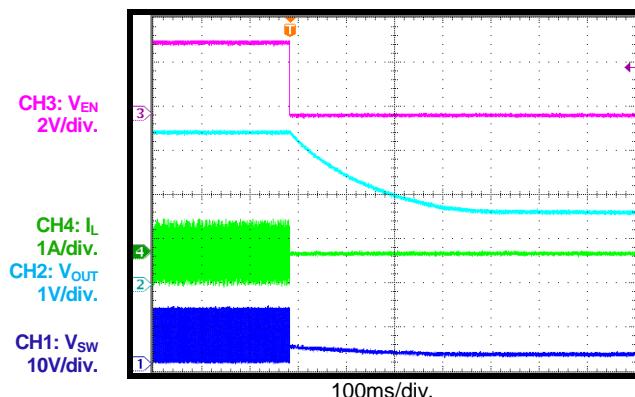


Shutdown through EN

$I_{OUT} = 6A$

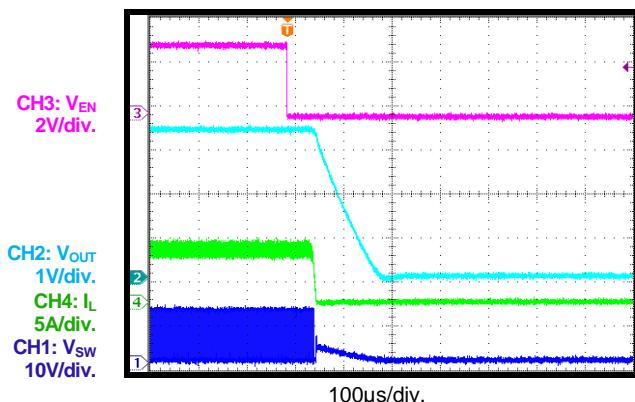


SCP Entry

$I_{OUT} = 0A$, AAM mode

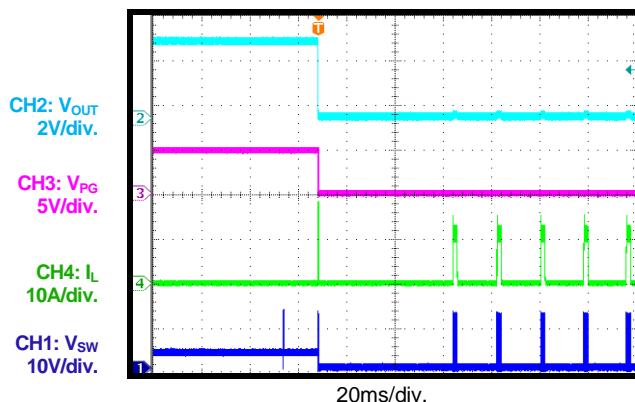


SCP Entry

$I_{OUT} = 0A$, FCCM

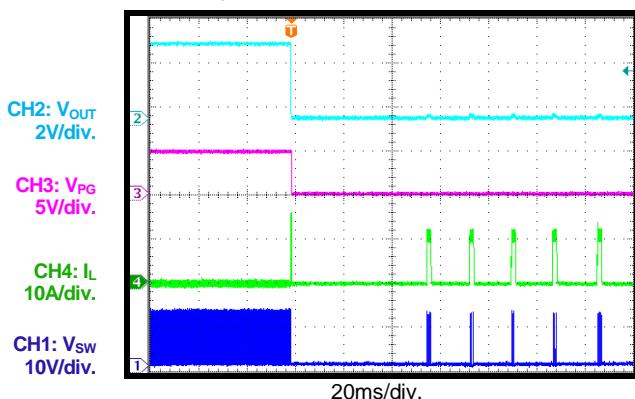

SCP Entry

$I_{OUT} = 6A$

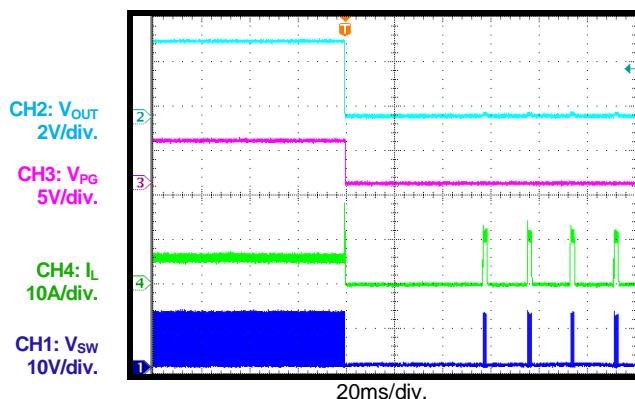


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board, $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


SCP Recovery

$I_{OUT} = 0A$, AAM mode

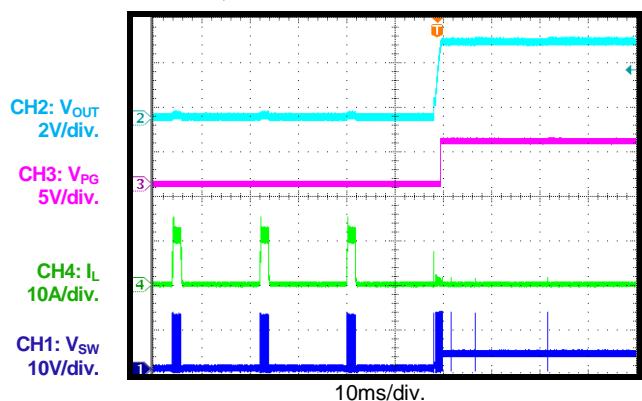


SCP Recovery

$I_{OUT} = 0A$, FCCM

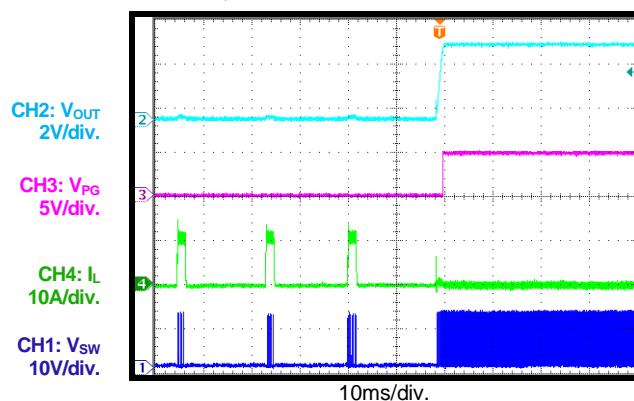


SCP Recovery

$I_{OUT} = 6A$

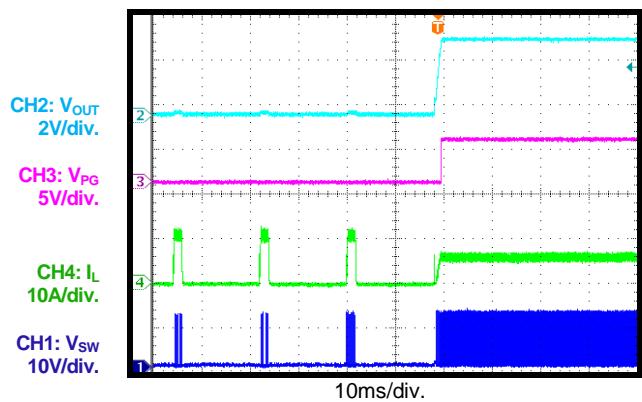


SCP Steady State

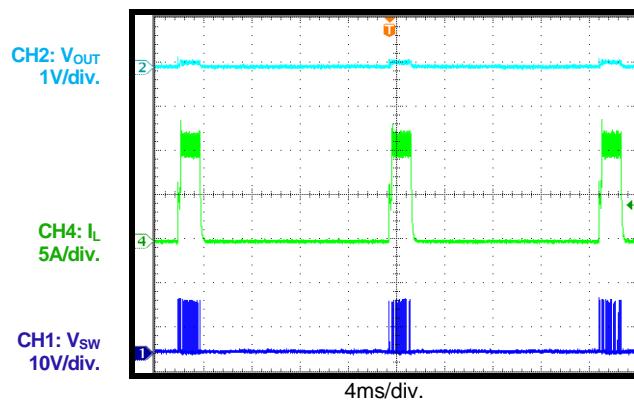


Load Transient Response

$I_{OUT} = 3A$ to $6A$

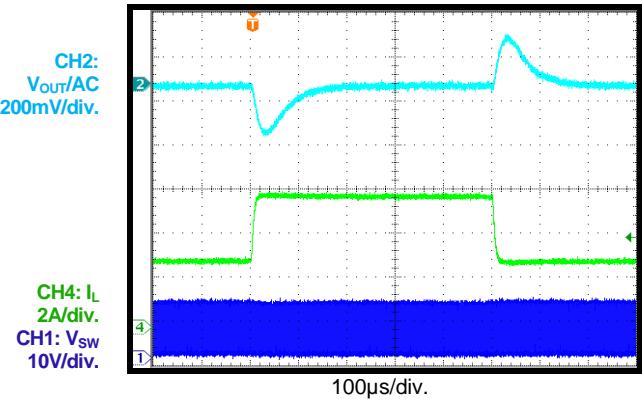

SYNC Operation

$I_{OUT} = 6A$, SYNC frequency = $350kHz$

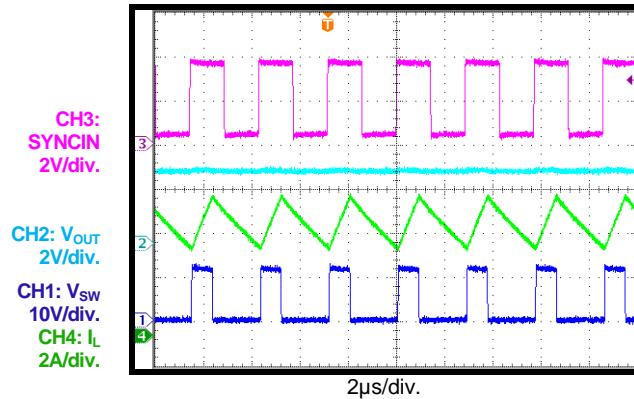


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board, $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{sw} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


SYNC Operation

$I_{OUT} = 6A$, SYNC frequency = 1000kHz

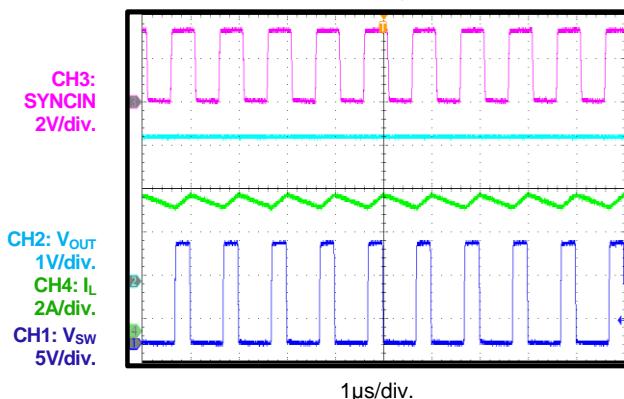


SYNCO Operation

$I_{OUT} = 6A$, SYNC frequency = 350kHz

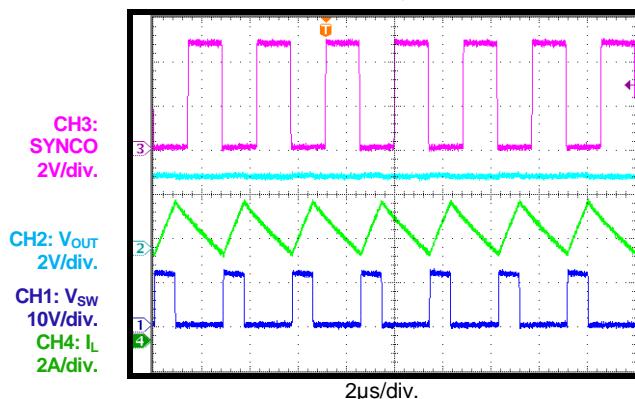


SYNCO Operation

$I_{OUT} = 6A$, SYNC frequency = 530kHz

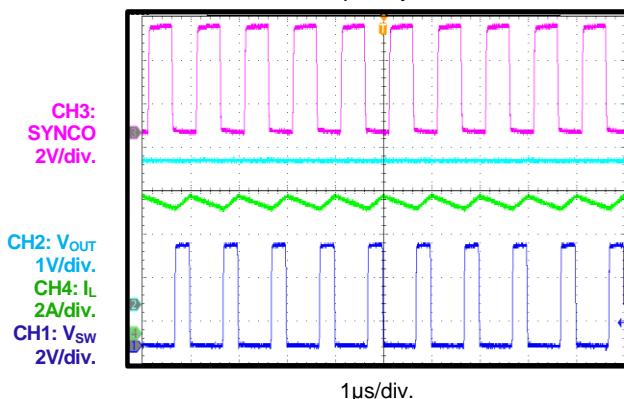


PG in Start-Up through VIN

$I_{OUT} = 0A$

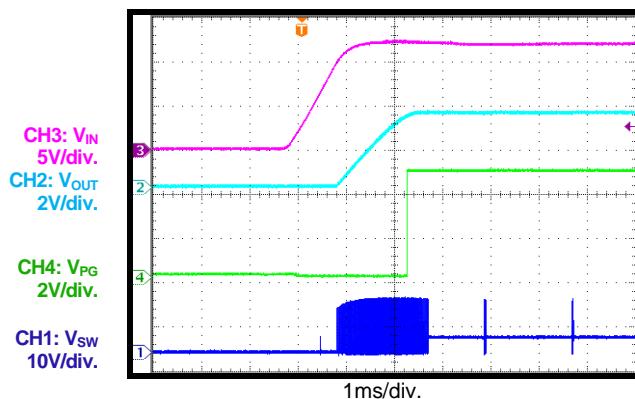


PG in Start-Up through VIN

$I_{OUT} = 6A$

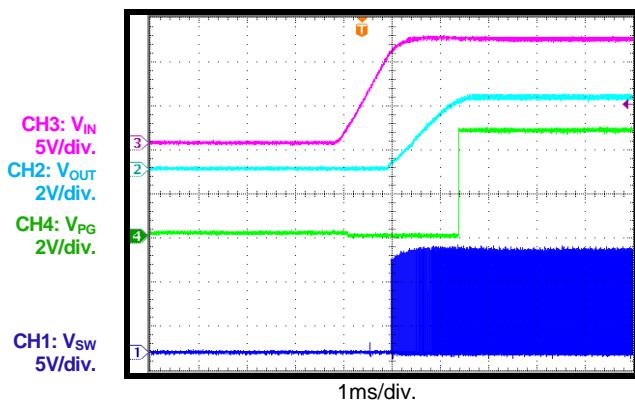

PG in Shutdown through VIN

$I_{OUT} = 0A$

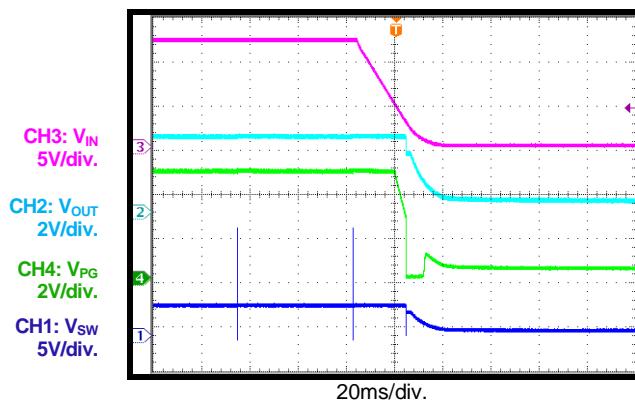


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board, $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


PG in Shutdown through VIN

$I_{OUT} = 6A$

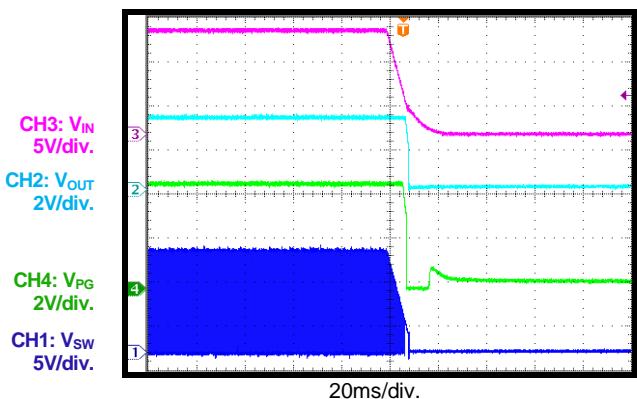


PG in Start-Up through EN

$I_{OUT} = 0A$

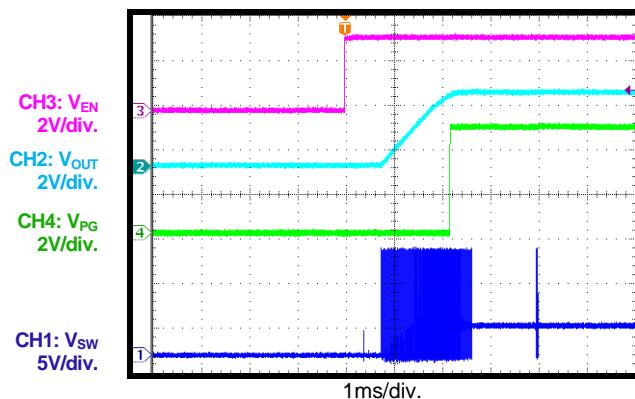


PG in Start-Up through EN

$I_{OUT} = 6A$

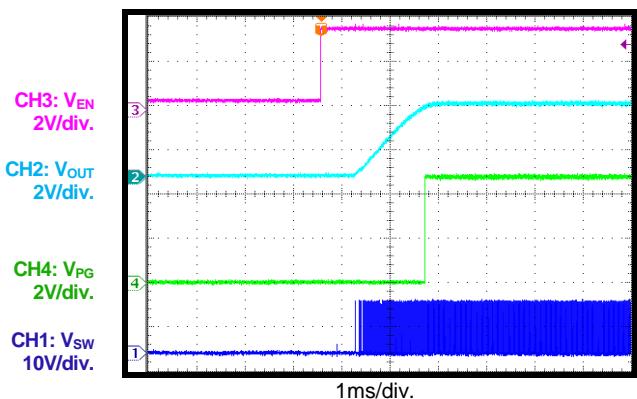


PG in Shutdown through EN

$I_{OUT} = 0A$

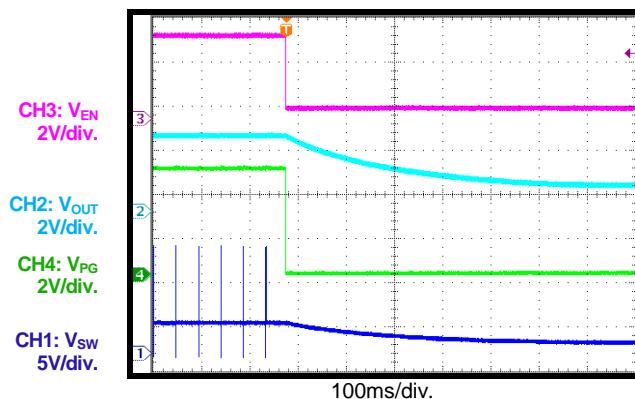


PG in Shutdown through EN

$I_{OUT} = 6A$

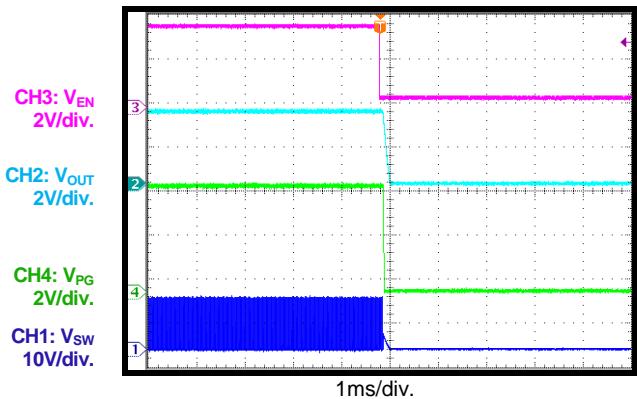

Low-Dropout Mode

$V_{IN} = 3.3V$, V_{OUT} set to $3.3V$, $I_{OUT} = 0A$

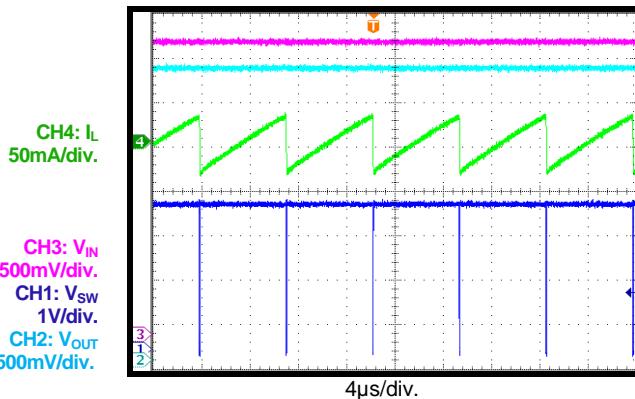


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board, $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $C_{OUT} = 2 \times 47\mu F$, $L = 4.7\mu H$, $f_{SW} = 410kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Low-Dropout Mode

$V_{IN} = 3.3V$, V_{OUT} set to $3.3V$, $I_{OUT} = 6A$

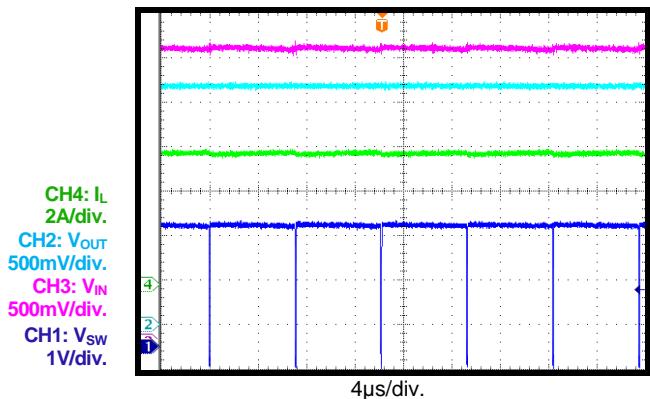


Load Dump

$V_{IN} = 12V$ to $36V$, $I_{OUT} = 6A$

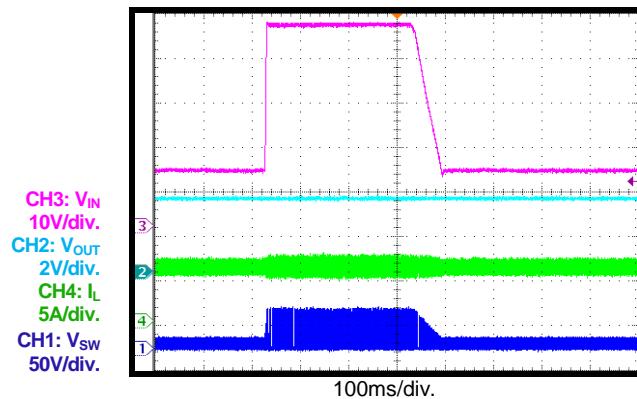


Cold Crank

$V_{IN} = 12V$ to $3.3V$ to $5V$, $I_{OUT} = 6A$

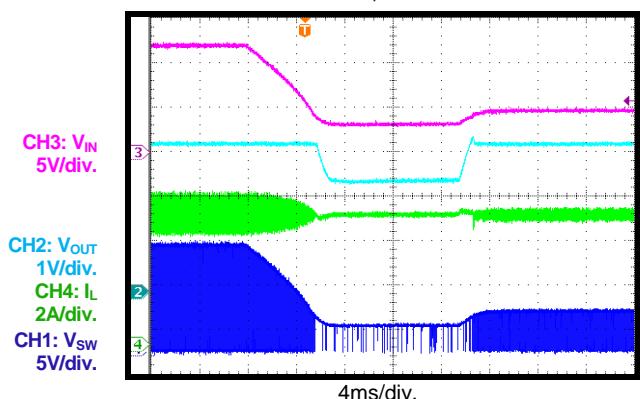


V_{IN} Ramping Up and Down

$I_{OUT} = 0.1A$

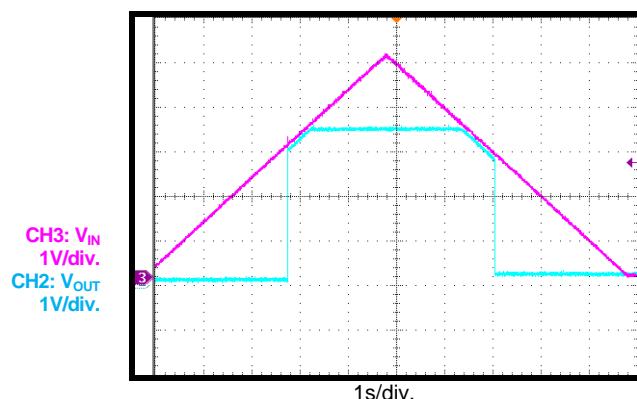


V_{IN} Ramping Down and Up

$I_{OUT} = 1mA$

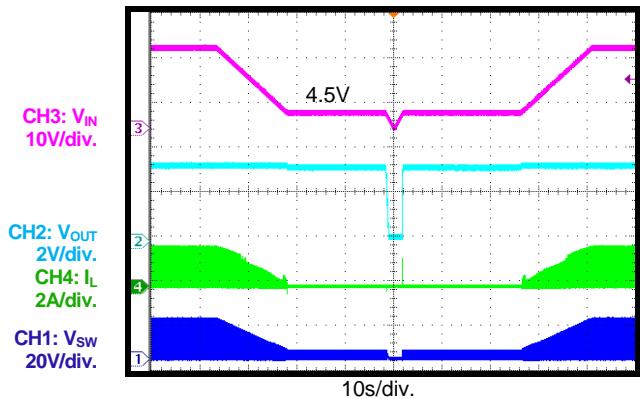

V_{IN} Ramping Down and Up

$I_{OUT} = 6A$

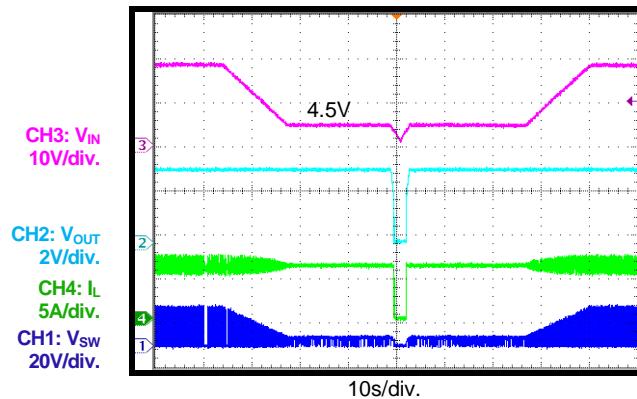

PCB LAYOUT (2)

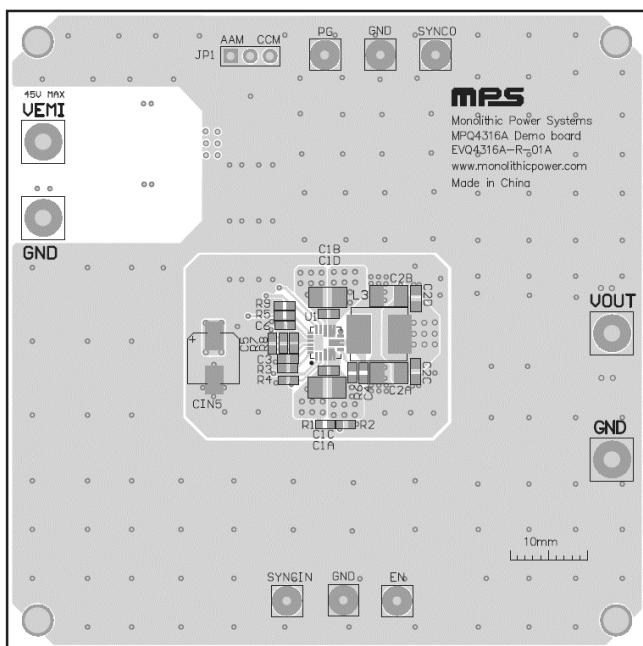


Figure 4: Top Silk and Top Layer

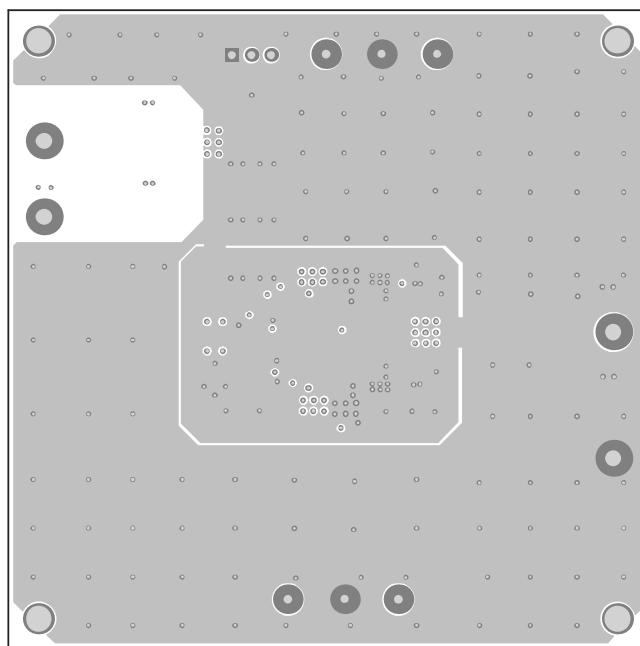


Figure 5: Mid-Layer 1

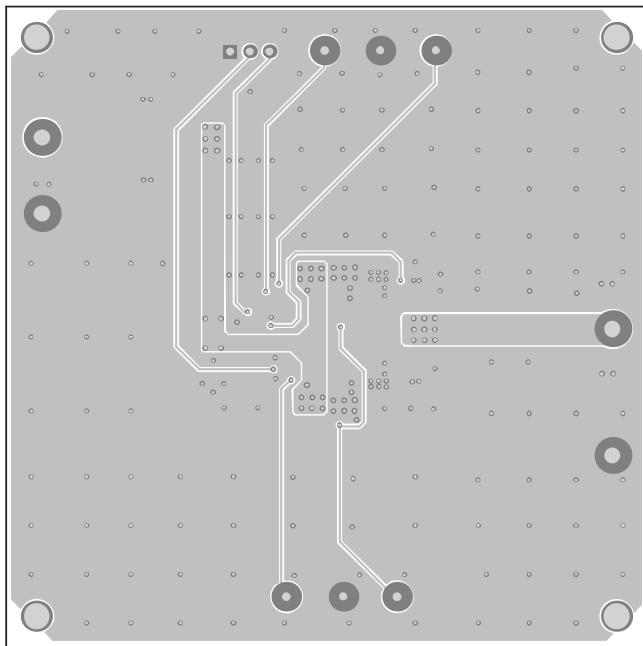


Figure 6: Mid-Layer 2

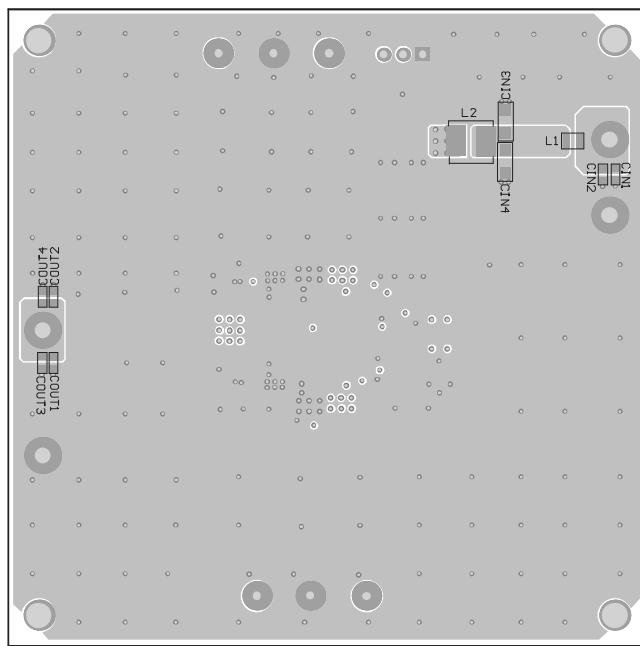


Figure 7: Bottom Layer and Bottom Silk

Note:

- 2) The copper thickness is 2oz.

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	8/11/2022	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.