


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case that the application demands a high level of reliability, such as automotive,  
 please contact a company representative for further information.

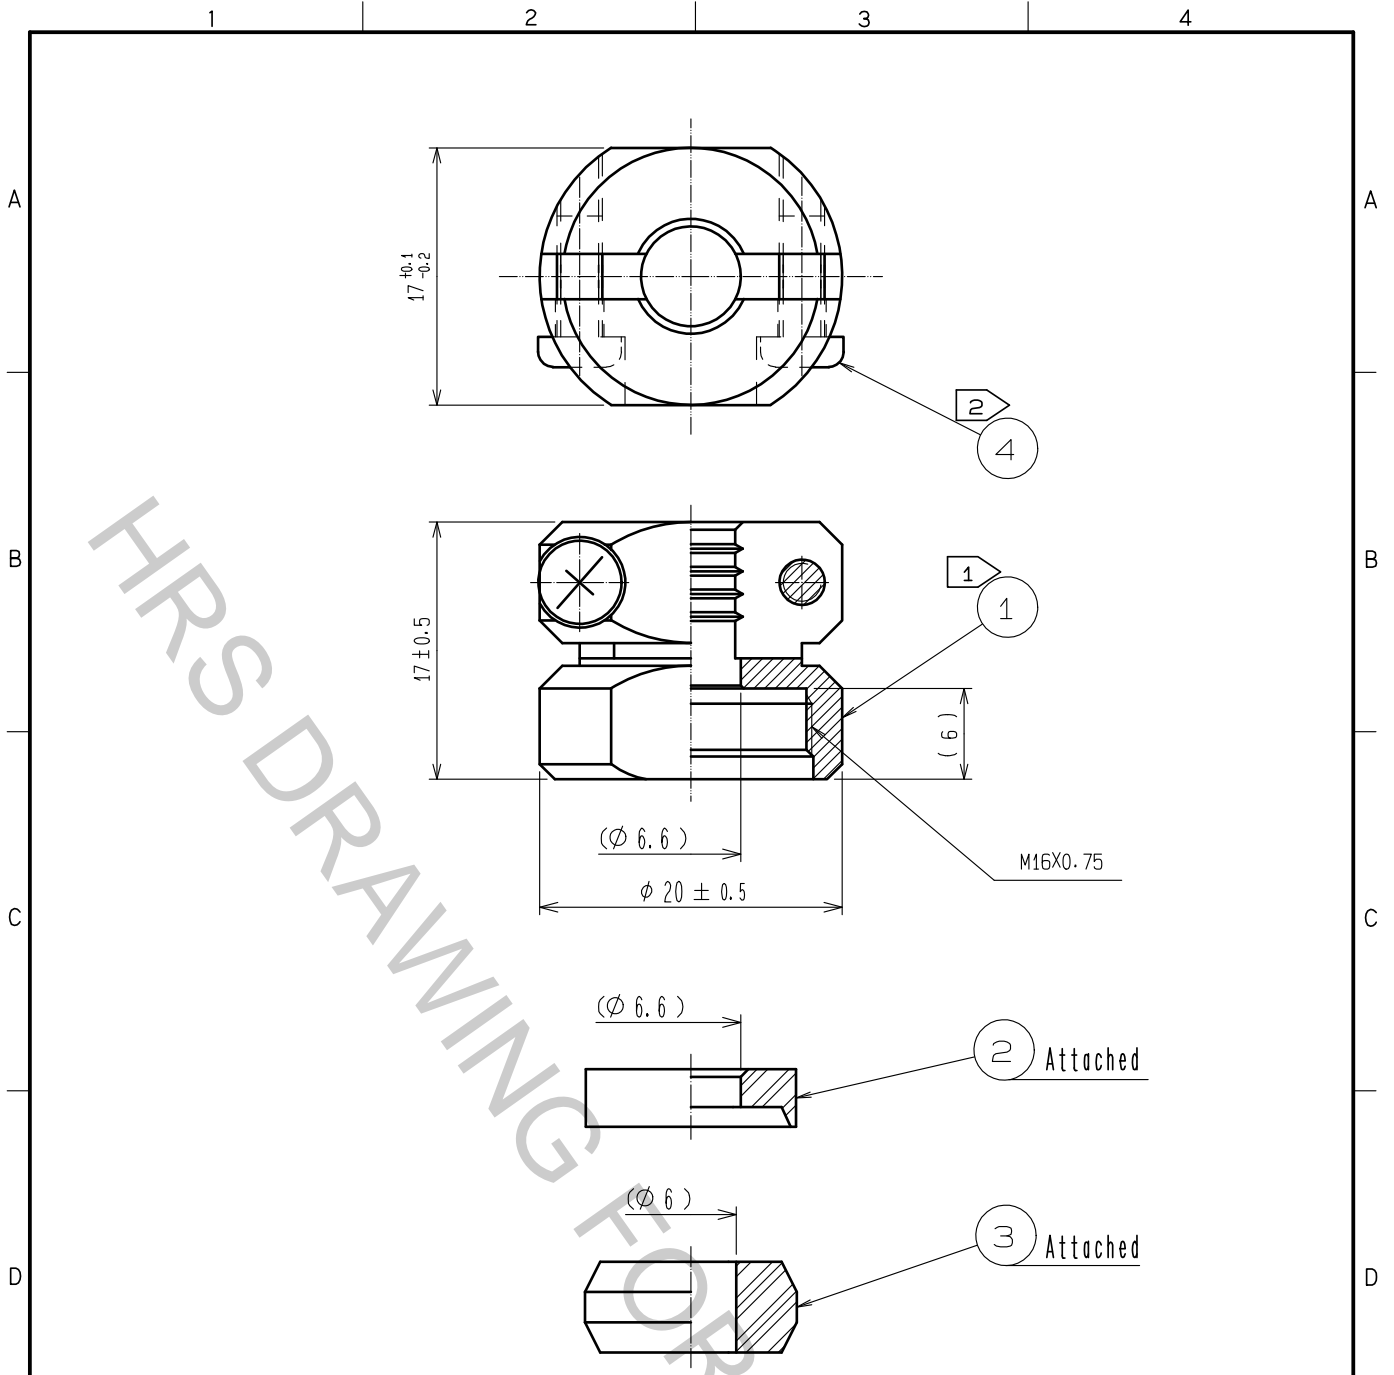

Notes ① The recommended clamp torque of REF. No. ① to be 2 to 2.5 N·m.  
 LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent  
 REF. No. ① form loosening.  
 ② The recommended clamp torque of REF. No. ④ to be 0.65 to 0.7 N·m.  
 ③ Sealing and airtightness and oil resisting shall be tested  
 under mated condition with an applicable connector.

2	POLYPHENYLENE SULFIDE (BLACK)	UL94V-0	4	STAINLESS STEEL	M3×0.5×8
1	BRASS	BLACK CHROME PLATING	3	ACRYLONITRILE BUTADIENE RUBBER (GRAY)	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED :HY. KOBAYASHI 15.08.04	CHECKED :HY. KOBAYASHI 15.08.04	DESIGNED :HY. KISHI 15.08.04	DRAWN :HY. KISHI 15.08.04
DRAWING NO. EDC-110596-71-00 PART NO. JR13WCC-6(71) CODE NO. CL114-2047-6-71			DESIGNED CHECKED DATE		
APPROVED :HY. KOBAYASHI 15.08.04 CHECKED :HY. KOBAYASHI 15.08.04 DESIGNED :HY. KISHI 15.08.04 DRAWN :HY. KISHI 15.08.04			DRAWING NO. EDC-110596-71-00 PART NO. JR13WCC-6(71) CODE NO. CL114-2047-6-71		