
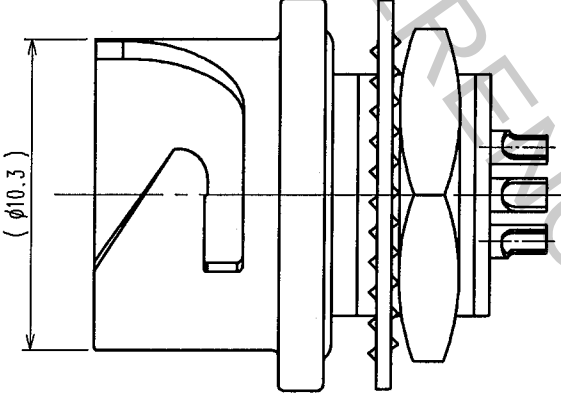
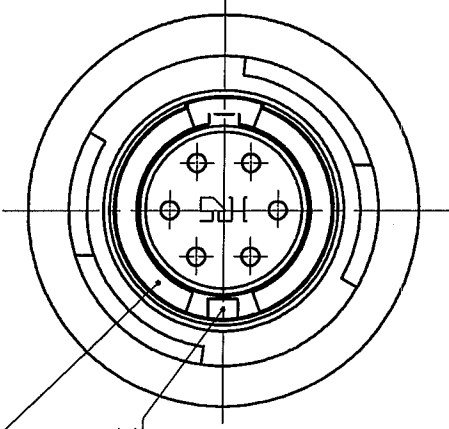



In case that the application demands a high level of reliability such as automotive, please contact a company representative for further information.

| DESCRIPTION OF REVISIONS |  | BY         | CHKD | DATE    | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|--------------------------|--|------------|------|---------|-------|--------------------------|----|------|------|
| 1                        |  | H.Z.       | H.S. | 04.12.1 | 1     |                          |    |      |      |
| 2                        |  | RE-C-03960 |      |         |       |                          |    |      |      |
| 3                        |  |            |      |         |       |                          |    |      |      |
| 4                        |  |            |      |         |       |                          |    |      |      |

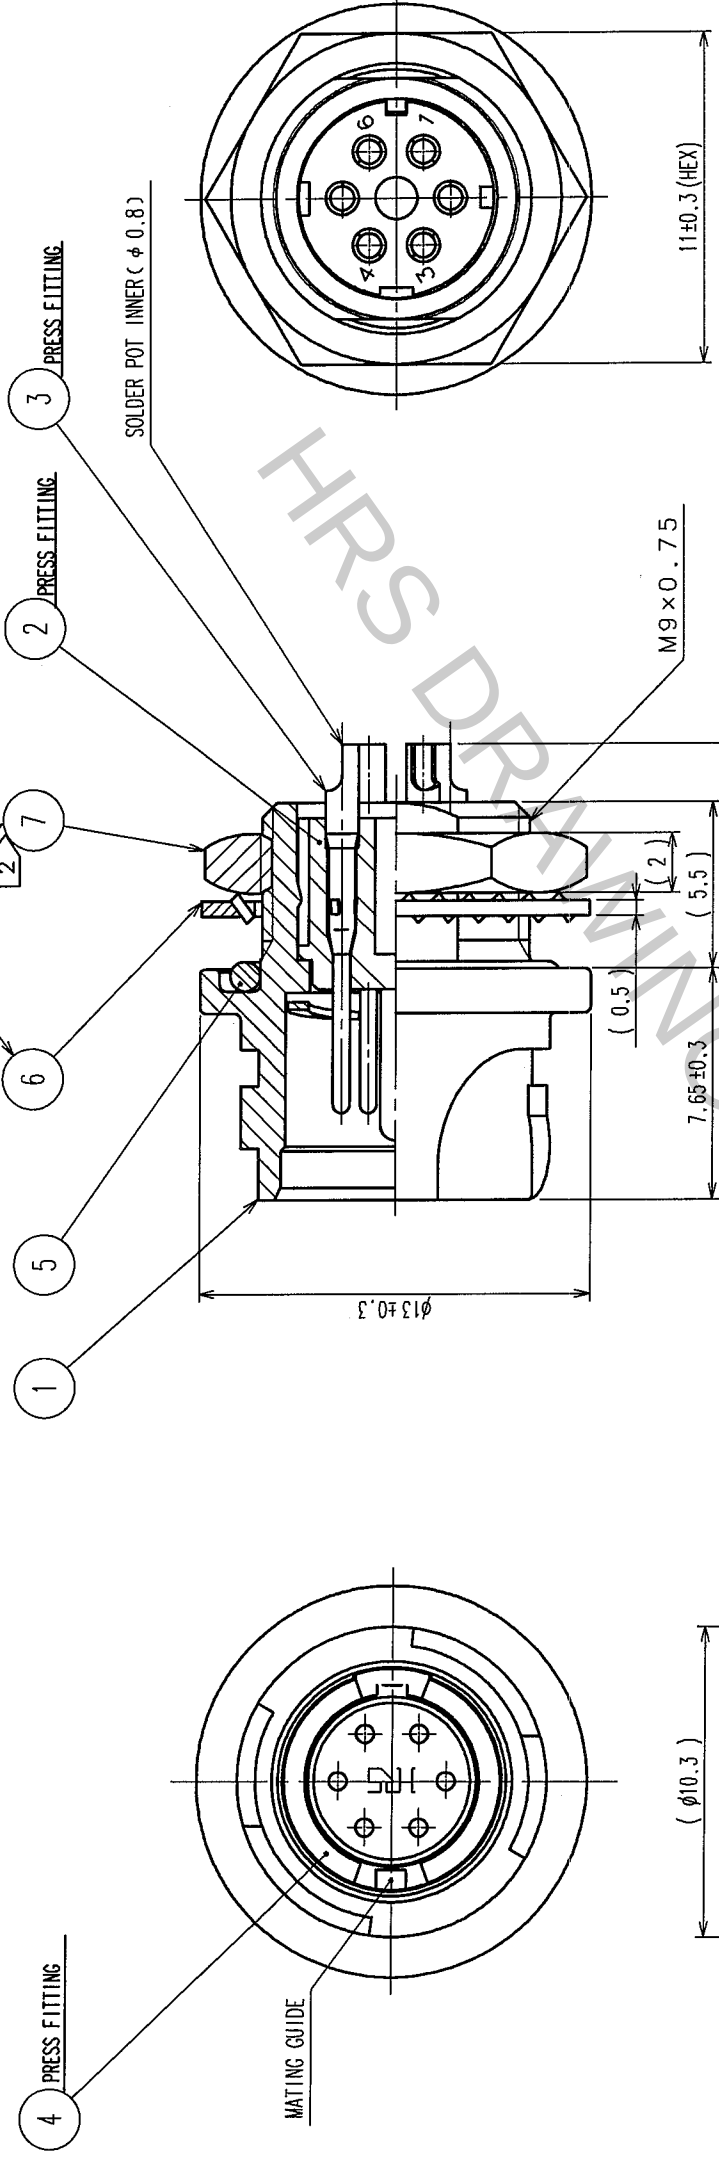

PANEL INSTALLATION HOLE  
PANEL THICKNESS (0.7 TO 2)

(POSITION CHANGE)

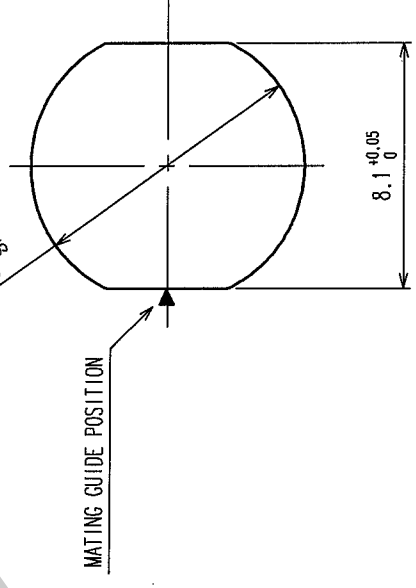

- NOTES
- 1 PLATING (REF. NO. 3)  
CONTACT AREA : GOLD 0.2 μm min  
OTHERS : GOLD AND NICKEL
  - 2 UNDER PLATING : NICKEL 2 μm min
  - 3 THE RECOMMENDED CLAMP TORQUE OF REF. NO. 7 TO BE 1.5 TO 2N · m.  
THREAD LOCKER TO THE THREADED PORTION OF REF. NO. 1 IS RECOMMENDED TO PREVENT REF. NO. 7 FROM LOOSING.  
RECOMMENDED THREAD LOCKER: LOCTITE 271, HENKEL JAPAN LTD.  
WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF. NO. 5 IS ASSEMBLED SURELY INTO THE GROOVE OF REF. NO. 1 AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

|     |                 |                 |     |                            |                 |
|-----|-----------------|-----------------|-----|----------------------------|-----------------|
| 4   | PHOSPHOR BRONZE | NICKEL PLATING  |     |                            |                 |
| 3   | COPPER ALLOY    | <div>1</div>    | 7   | STEEL                      | NICKEL PLATING  |
| 2   | PPS             | (BLACK)         | 6   | STEEL                      | NICKEL PLATING  |
| 1   | ZINC ALLOY      | NICKEL PLATING  | 5   | CHLOROPRENE RUBBER (BLACK) |                 |
| NO. | MATERIAL        | FINISH, REMARKS | NO. | MATERIAL                   | FINISH, REMARKS |

|                |       |             |              |          |            |         |         |          |            |          |
|----------------|-------|-------------|--------------|----------|------------|---------|---------|----------|------------|----------|
| CODE NO. (OLD) | CL    | DRAWN       | H. Kawashima | DESIGNED | H. Zamba   | CHECKED | M. Sato | APPROVED | M. Yoshida | RELEASED |
| SCALE          | 4 : 1 | DRAWING NO. | EDC3-113836  | PART NO. | LFO7WBR-6P |         |         |          |            |          |
| UNITS          | mm    |             |              |          |            |         |         |          |            |          |

|    |              |              |
|----|--------------|--------------|
| CL | CL136-1001-7 | FORM NO. 229 |
| CL | CL136-1001-7 | FORM NO. 229 |