


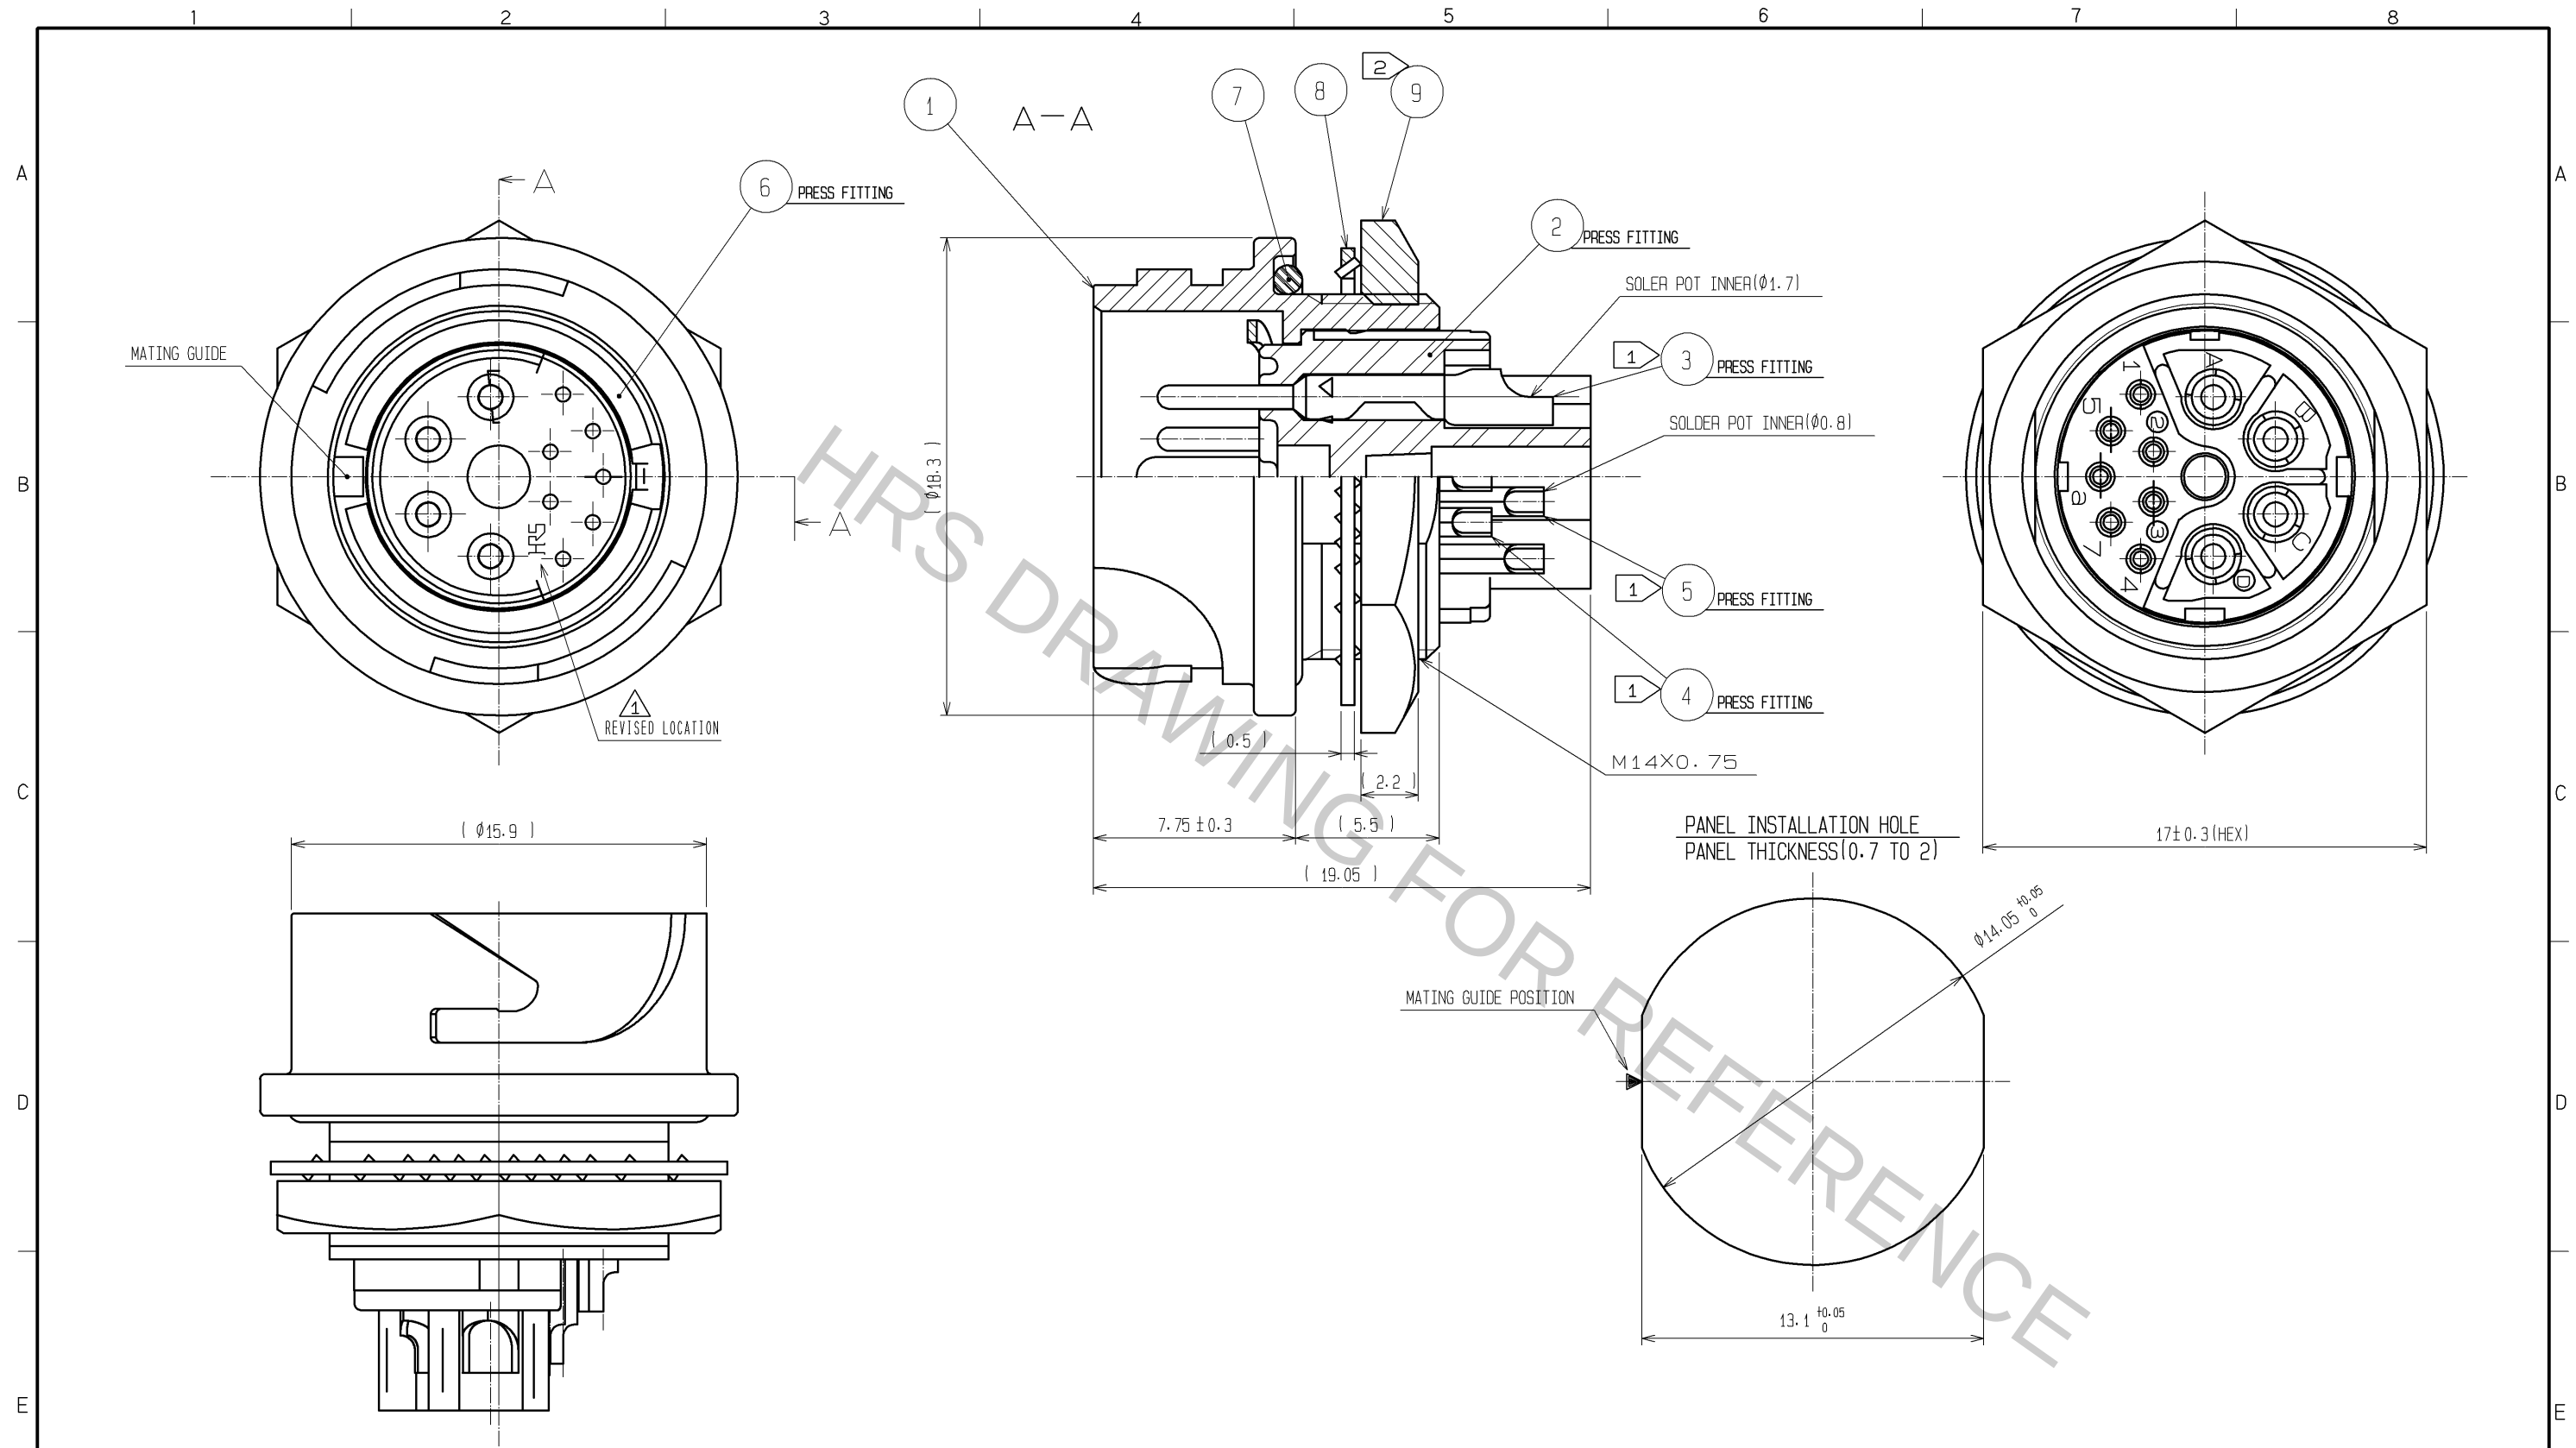

- NOTES
- 1 PLATING(REF.NO.①, ②, ③)
CONTACT AREA : GOLD $0.2\mu\text{m}$ min.
OTHERS : GOLD AND NICKEL
UNDER PLATING : NICKEL $2\mu\text{m}$ min.
 - 2 THE RECOMMENDED CLAMP TORQUE OF REF.NO.① TO BE 2 TO $2.5\text{N}\cdot\text{m}$.
THREAD LOCKER TO THE THREADED PORTION OF REF.NO.① IS RECOMMENDED TO PREVENT REF.NO.① FROM LOOSING.
RECOMMENDED THREAD LOCKER:LOCTITE 271, HENKEL JAPAN LTD.
 - 3 WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF.NO.① IS ASSEMBLED SURELY INTO THE GROOVE OF REF.NO.① AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

5	COPPER ALLOY	1			
4	COPPER ALLOY	1	9	BRASS	NICKEL PLATING
3	COPPER ALLOY	1	8	PHOSPHOR BRONZE	NICKEL PLATING
2	PPS	(BLACK)	7	CHLOROPRENE RUBBER	(BLACK)
1	ZINC ALLOY	NICKEL PLATING	6	PHOSPHOR BRONZE	NICKEL PLATING
部番	材 質	处 理 , 備 考	部番	材 質	处 理 , 備 考
UNITS mm		SCALE 4 : 1	△の数 1	訂 正 記 事 DIS-C-000768	設 計 DS. MATSUNE
HIROSE ELECTRIC CO., LTD.			承 認 : MR. YOSHIDA	05.01.05	図 番 : EDC3-114400-00
			検 図 : MO. SATOH	05.01.05	製 品 名 : LF13WBR-11P
			設 計 : YH. YAMADA	05.01.05	製 品 コード : CL136-1011-0-00
			製 図 : YH. YAMADA	05.01.05	
					1/1