

Evaluating the HMC1126ACEZ GaAs, pHEMT, Low Noise Amplifier, 400 MHz to 52 GHz

FEATURES

4-layer, Rogers 4003C evaluation board
End launch, 1.85 mm RF connectors
Through calibration path (depopulated)

EVALUATION KIT CONTENTS

HMC1126-EVALZ evaluation board

EQUIPMENT NEEDED

RF signal generator
RF spectrum analyzer
RF network analyzer
5 V, 200 mA power supply
0 V to -2 V, ±1 mA power supply
1 V, 1 mA power supply

GENERAL DESCRIPTION

The HMC1126-EVALZ is a 4-layer printed circuit board (PCB). The substrate between the top layer and the first internal layer is 12 mils thick and is made from Rogers 4003C. The internal and bottom side layers are all ground planes.

The RFIN and RFOUT ports on the HMC1126-EVALZ are populated with 1.85 mm, female coaxial connectors, and the respective RF traces have a 50 Ω characteristic impedance. The HMC1126-EVALZ is populated with components suitable for use over the entire -40°C to +85°C operating temperature range of the HMC1126ACEZ.

To calibrate out board trace losses, a through calibration path, CAL, is provided between the CAL1 and CAL2 connectors. CAL1 and CAL2 must be populated with 1.85 mm, female coaxial connectors (see Table 2 for the part number). The power and bias voltages are the applied surface-mount technology (SMT) test points VDD, VGG1, and VGG2. Because there is no ground pin on the HMC1126-EVALZ, connect the ground cable by attaching a clip lead to one of the RF connector edges or to one of the available holes in the PCB.

The RF traces are 50 Ω, grounded, coplanar waveguide. The package ground leads and the exposed pad connect directly to

the ground plane. Multiple vias connect the ground planes with particular focus on the area directly beneath the ground pad.

For full details on the HMC1126ACEZ, see the HMC1126ACEZ data sheet, which must be consulted in conjunction with this user guide when using the HMC1126-EVALZ.

EVALUATION BOARD PHOTOGRAPHS

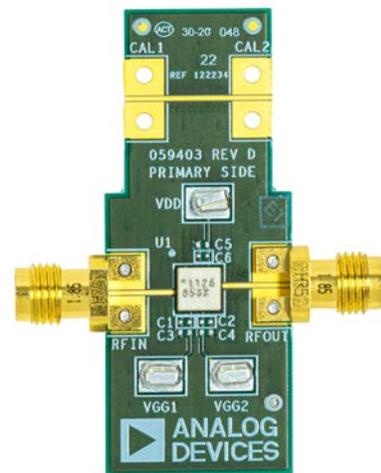


Figure 1. HMC1126-EVALZ Top Side

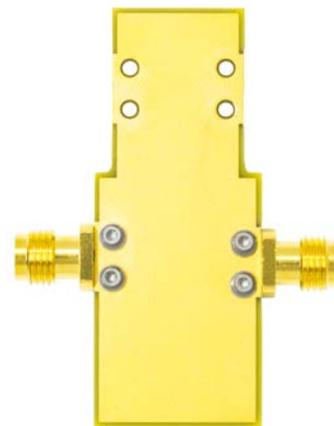


Figure 2. HMC1126-EVALZ Bottom Side

TABLE OF CONTENTS

Features.....	1	Operating the HMC1126-EVALZ.....	3
Evaluation Kit Contents.....	1	Power-Up and Power-Down Sequencing.....	3
Equipment Needed.....	1	Through Calibration Path.....	3
General Description.....	1	Evaluation Board Schematic and Artwork.....	5
Evaluation Board Photographs.....	1	Ordering Information.....	6
Revision History.....	2	Bill of Materials.....	6
Evaluation Board Hardware.....	3		

REVISION HISTORY

11/2021—Revision 0: Initial Version

EVALUATION BOARD HARDWARE

OPERATING THE HMC1126-EVALZ

A 5 V power supply that can source up to 200 mA is required to provide the main bias to the HMC1126-EVALZ (see Figure 4). Connect the 5 V power supply to the VDD SMT test point. In addition, a 0 V to -2 V power supply that can source ± 1 mA and a 1 V power supply that can source 1 mA are required to provide bias control. Connect the 0 V to -2 V power supply to the VGG1 SMT test point, and connect the 1 V power supply to the VGG2 SMT test point. Because there is no ground pin on the HMC1126-EVALZ, connect the ground cable by attaching a clip lead to one of the RF connector edges or to one of the available holes in the PCB.

POWER-UP AND POWER-DOWN SEQUENCING

To avoid damaging the device, careful attention must be paid to the sequencing of the RF input, the gate bias voltages, and the drain bias voltage.

See the [HMC1126ACEZ](#) data sheet for the bias sequencing information.

THROUGH CALIBRATION PATH

The HMC1126-EVALZ includes a calibration path (see the evaluation board schematic and assembly drawing in Figure 5 and Figure 6, respectively). CAL1 and CAL2 must be populated with RF connectors to use the through calibration path. Figure 3 shows the insertion loss, input return loss, and output return loss of the through calibration path. Table 1 details the insertion loss of the through calibration path.

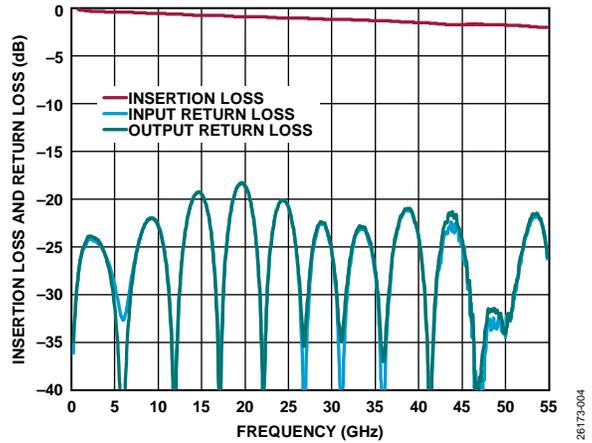


Figure 3. Insertion Loss and Return Loss (Input and Output) of the Through Calibration Path

Table 1. Insertion Loss of the Through Calibration Path

Frequency (GHz)	Insertion Loss (dB)
0.4	-0.11
1	-0.16
5	-0.41
10	-0.58
15	-0.77
20	-0.93
25	-1.0
30	-1.1
35	-1.3
40	-1.5
45	-1.7
50	-1.7
52	-1.9
55	-2.0

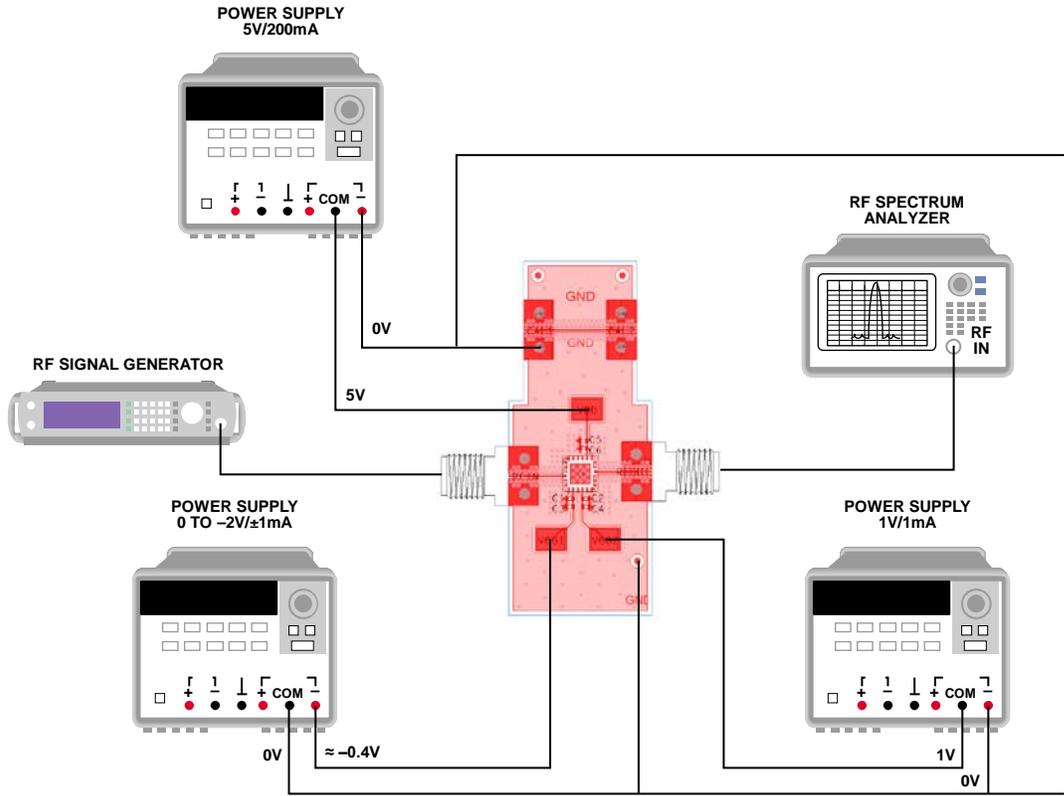


Figure 4. Operating the HMC1126-EVALZ

26173-003

EVALUATION BOARD SCHEMATIC AND ARTWORK

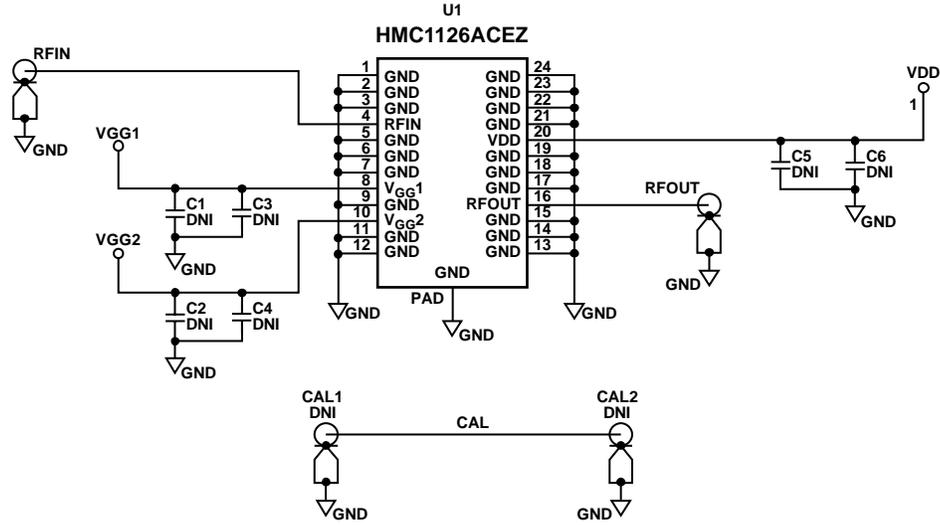


Figure 5. HMC1126-EVALZ Schematic

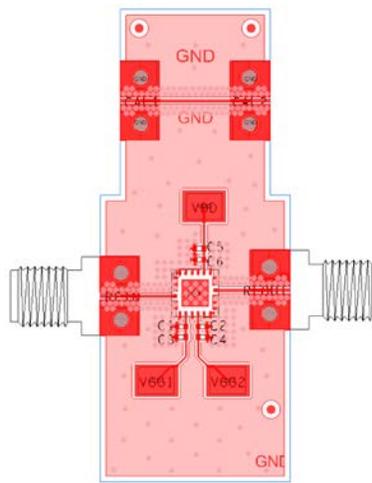


Figure 6. HMC1126-EVALZ Assembly Drawing (CAL1 and CAL2 Not Installed)

ORDERING INFORMATION

BILL OF MATERIALS

Table 2.

Reference Designator	Description	Manufacturer	Part Number
C1, C2, C6	Ceramic capacitors, 100 pF, 0402, do not install (DNI)	Kemet	C0402C101J5GACTU
C3, C4, C5	Ceramic capacitors, 0.1 μ F, 0402, DNI	TDK Corporation	C1005X7R1H104K050BE
RFIN, RFOUT	Coaxial connectors, PCB header, 1.85 mm, 50 Ω , 67 GHz	Hirose Electric Co.	HV-LR-SR2(12)
VDD, VGG1, VGG2	Connectors, SMT test points	Keystone Electronics	5016
CAL1, CAL2	Coaxial connectors, PCB header, 1.85 mm, 50 Ω , 67 GHz, DNI	Hirose Electric Co.	HV-LR-SR2(12)
U1	Gallium arsenide (GaAs), pseudomorphic high electron mobility transistor (pHEMT), low noise amplifier, 400 MHz to 52 GHz	Analog Devices, Inc.	HMC1126ACEZ

**ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.