


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△							..			△							..		
△							..			△							..		
△							..			△							..		

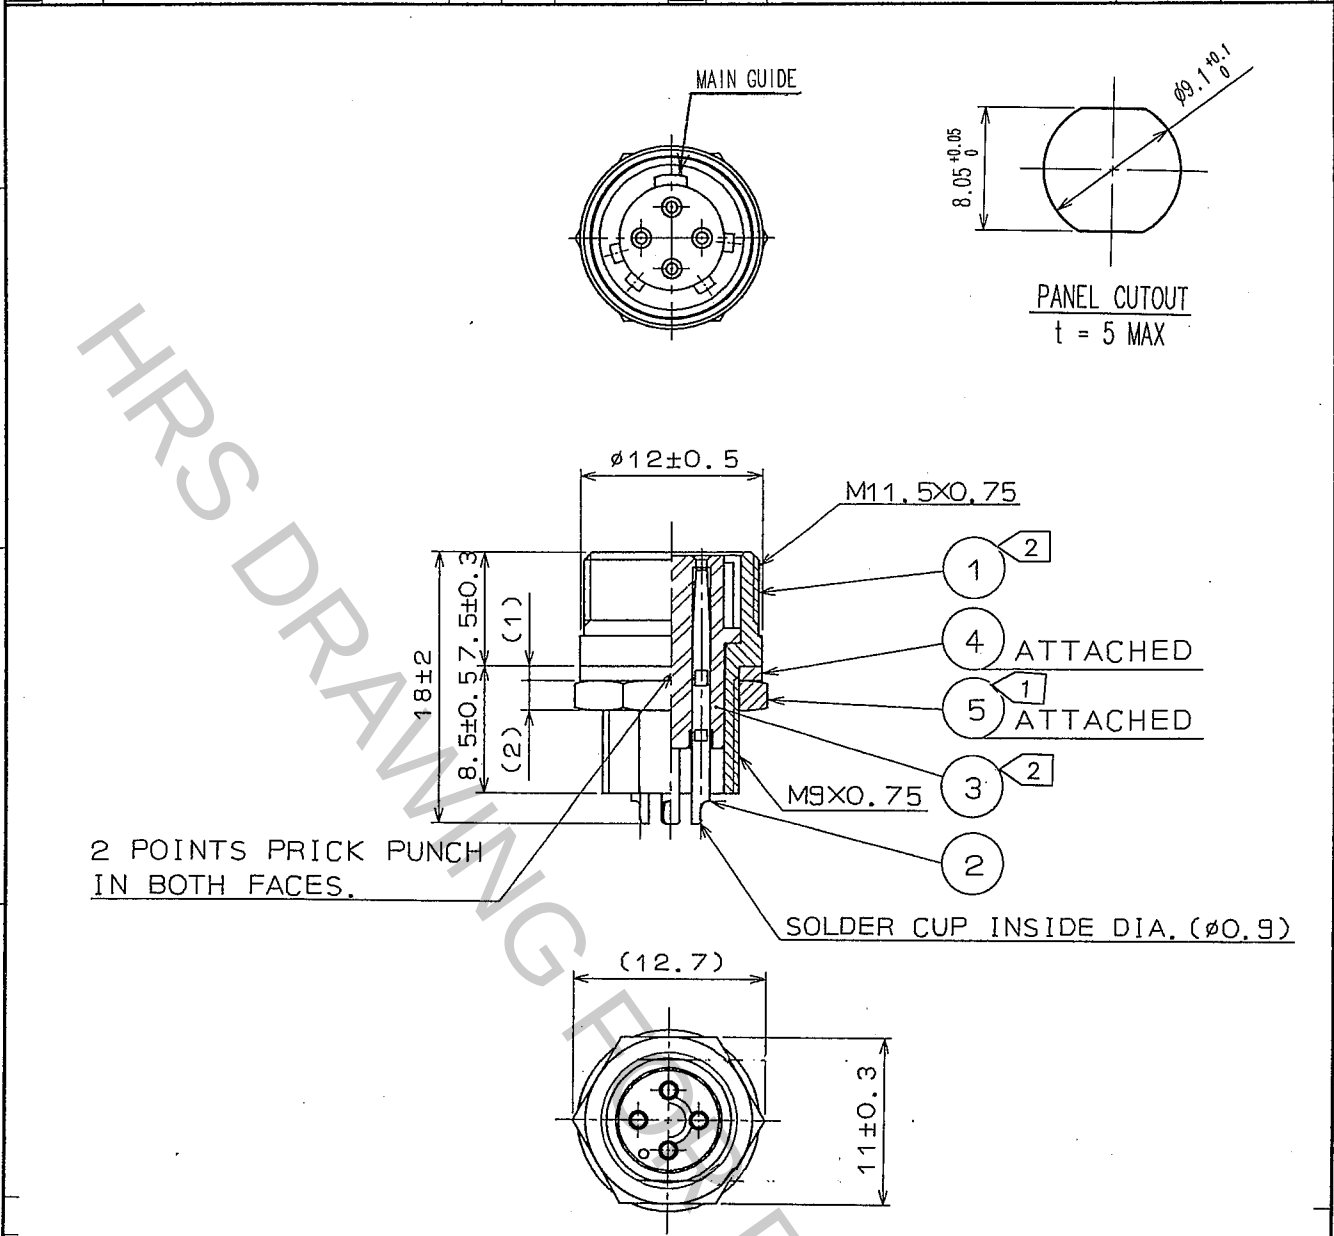

NOTE ① THE RECOMMENDED CLAMP TORQUE OF COMPONENT ⑤ : 1.5 TO 2 N · m
LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO
PREVENT COMPONENT ⑤ FROM LOOSENING.
② TORQUE FOR THE FIXTURE OF COMPONENT ① AND ③ IS TO BE 0.7 N · m MIN.

3	POLYACETAL	(WHITE)	5	STEEL	NICKEL PLATED
2	COPPER ALLOY	SURFACE PLATING : GOLD PLATING 0.2μ m min. UNDER PLATING : NICKEL PLATING 3μ m min.	4	POLYAMIDE	(WHITE)
1	BRASS	CHROME PLATING			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
CODE NO. (OLD)			DRAWN		
			DESIGNED		
			CHECKED		
			APPROVED		
			RELEASED		
			E.Yumino		
			05.09.27		
			E.Yumino		
			05.09.27		
			H.Zemba		
			05.09.28		
			M.Sato		
			05.09.28		
DRAWING NO.			PART NO.		
EDC4-006143-71			SR30-10R-4S (71)		
SCALE			CODE NO.		
2 : 1			CL103-0264-0-71		
UNITS			1/1		
mm					

HRS HIROSE ELECTRIC CO., LTD.