

MIP SERIES

3012-0317
Issue C

Heavy-Duty, Media-Isolated Pressure Transducers Digital Output, 1 bar to 60 bar | 15 psi to 870 psi

DESCRIPTION

Media-Isolated Pressure Transducers with Digital Output use piezoresistive sensing technology with ASIC (Application Specific Integrated Circuit) signal conditioning in a stainless-steel housing and cable harness electrical connections. The MIPS Series Digital Output transducers are fully calibrated, and temperature compensated from -40°C to 125°C [-40°F to 257°F]. MIPS Series Digital Output Series transducers are developed for pressure applications that involve measurement of hostile media in harsh environments. MIP Series Digital Output comes with clock speed of up to 1 MHz for the SPI output option, and 400 kHz for the I²C option, respectively.

VALUE TO CUSTOMERS

- **Cost-effective:** Small size helps engineers reduce design and manufacturing costs while maintaining the performance and reliability of the systems they design.
- **Accurate:** Total Error Band (TEB) as low as ±1.0 % and wide pressure range enable engineers to enhance system performance by improving resolution and system accuracy.
- **Supply voltage range, variety of pressure units, types and ranges, output options, and wide operating temperature range** simplify use in the application.

- **Versatile:** Wet-media compatibility, low power, and temperature output options make the sensor a versatile choice for Internet of Things applications.
- **High insulation resistance and dielectric strength.**
- **Digital output:** Allows the sensor to be directly plugged into the customer's circuitry without requiring major design changes. This plug and play feature enable ease of implementation and system level connectivity.
- **Reduced current consumption:** Helps to reduce energy costs and enhances product life if used in battery driven systems. Sleep mode for ultra-low current consumption.
- **Hermetically welded design:** Supports almost all media without the use of an internal seal. The sensors are designed to be used in harsh environments that see aggressive media.

DIFFERENTIATION

- **Great customer value:** Multiple configuration possibilities provide flexibility of use in the application with no upfront NRE or tooling charges.
- **Durable:** Provides the tough environmental specifications needed, including insulation resistance and dielectric strength, and EMC performance.



FEATURES

- Pressure range: 1 bar to 60 bar | 15 psi to 870 psi absolute; 8 bar to 60 bar | 100 psi to 870 psi sealed gage
- SPI output: 50 kHz to 1000 kHz, I²C output: 100 kHz to 400 kHz with 24 bits resolution in pressure and temperature output
- Fully calibrated and temperature compensated
- Total Error Band: ±1.0 %FSS from -20°C to 85°C [-4°F to 185°F], ±2.0 %FSS from -40°C to 125°C [-40°F to 257°F]
- Insulation resistance: >100 MΩ, 1000 Vdc (in dry, non-ionized air)
- Current consumption: 3 mA max.
- Suitable for both 3.3 Vdc and 5 Vdc applications
- Ingress protection: IP67
- UL, CE, UKCA, RoHS, REACH compliant
- Twelve industry-standard pressure port types provide greater flexibility and configurable options for hermetically sealed process connection

TABLE 1. APPLICATIONS

| Industry | Application |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Industrial | Refrigerant pressure monitoring in HVAC/R systems, air compressor system pressure, water meter, water pumps, Industrial automation and flow control |
| Transportation | Air system monitoring, hydraulic oil pressure monitoring, agriculture/marine/railway machinery and equipment |
| Medical | Heavy duty hospital and outpatient equipment such as hospital beds and massage machines |
| Consumer | General appliances, sports equipment |

PORTFOLIO

Honeywell offers a variety of heavy duty pressure transducers for potential use in industrial and transportation applications. To view the entire product portfolio, [click here](#).

Honeywell

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

Figure 1. TEB Components for the MIP Series

Total Error Band (TEB) is a single specification that includes the major sources of sensor error. TEB should not be confused with accuracy, which is actually a component of TEB. TEB is the worst error that the sensor could experience.

Honeywell uses the TEB specification in its datasheet because it is the most comprehensive measurement of a sensor’s true accuracy. Honeywell also provides the accuracy specification in order to provide a common comparison with competitors’ literature that does not use the TEB specification.

Many competitors do not use TEB—they simply specify the accuracy of their device. Their accuracy specification, however, may exclude certain parameters. On their datasheet, the errors are listed individually. When combined, the total error (or what would be TEB) could be significant.

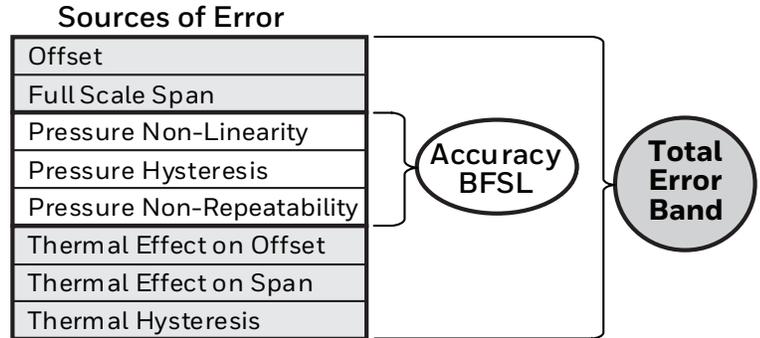


TABLE 2. ELECTRICAL SPECIFICATIONS (AT 25°C [77°F] AND UNDER UNLESS OTHERWISE NOTED.)

| Characteristic | Parameter |
|---------------------------------------------|-----------------------------------------|
| Supply voltage (V _{DD}) | 2.7 V to 5.5 V |
| Supply current: | |
| Active operating mode | 2.7 mA typical (min 2.4 mA, max 3.0 mA) |
| Sleep/Standby mode: | |
| 25°C [77°F] | 2 µA typical (min 1.6 µA, max 2.5 µA) |
| 85°C [185°F] | 6 µA |
| 125°C [257°F] | 22 µA |
| I ² C/SPI voltage level: | |
| low | <20 % supply voltage |
| high | >80 % supply voltage |
| Clock interface frequency: | |
| I ² C | 100 kHz to 400 kHz |
| SPI | 50 kHz to 1 MHz |
| Pullup resistor on I ² C SDA/SCL | >1.8 kOhm at 5.5 V _{DD} |

TABLE 3. ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS

| Characteristic | Parameter |
|-------------------------|-------------------------------------------------------------------------------------------------------------------|
| Shock | 100 G per MIL-STD-202, Method 213, Cond. C (at 25°C [77°F]), 100 G per MIL-STD-202F, Method 213B, and Condition C |
| Ingress protection | IP67 |
| Wetted materials: | |
| threaded ports | stainless steel 304L |
| diaphragm ring | stainless steel 316L |
| metal diaphragm | stainless steel 316L |
| external seal for ports | nitrile (-30°C to 100°C [-22°F to 212°F]) (other materials available) |

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

TABLE 4. PERFORMANCE SPECIFICATIONS (AT 25°C [77°F] AND UNDER UNLESS OTHERWISE NOTED.)

| Characteristic | Parameter |
|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Temperature ranges: Operating Storage Compensated | -40°C to 125°C [-40°F to 257°F] -40°C to 125°C [-40°F to 257°F] -40°C to 125°C [-40°F to 257°F] |
| Total Error Band¹ -20°C to 85°C -40°C to 125°C | ±1.0 %FSS ±2.0 %FSS |
| Accuracy BFSL² | ±0.25 %FSS |
| Configuration features | I ² C 00Hex address or SPI Mode 0 default ³ |
| Startup time⁴ | <2.5 ms |
| Response time⁵ | <1 ms |
| Output transfer function | 10 % to 90 % of 2 ²⁴ counts |
| Output resolution | 24 bits, (14 bits minimum) |
| Temperature accuracy | ±3°C |
| EMC rating: electrostatic discharge radiated immunity radiated emissions | ±4 kV contact, ±8 kV air per IEC 61000-4-2 3 V/m (80 MHz to 1000 MHz) per IEC 61000-4-3 Class A (30 MHz to 1 GHz) as per CISPR 11 |
| Insulation resistance | >100 MΩ at 1000 Vdc (60 s) |
| Dielectric strength | <1 mA at 1000 Vac (60 s) |
| Life | >10 million full scale pressure cycles over the calibrated pressure range |
| UL Conformity | Compliant ⁶ |

¹**Total Error Band:** The maximum deviation from the ideal transfer function over the entire compensated temperature and pressure range. Includes all errors due to offset, full scale span, pressure non-linearity, pressure hysteresis, pressure non-repeatability, thermal effect on offset, thermal effect on span, and thermal hysteresis (see Figure 1).

²**Accuracy:** The maximum deviation in output from a Best Fit Straight Line (BFSL) fitted to the output measured over the pressure range at 25°C [77°F]. Includes all errors due to pressure non-linearity, pressure hysteresis, and pressure non-repeatability.

³Refer to Section 2.0 (I²C) and Section 3.0 (SPI) for more details.

⁴**Startup time:** The time needed to receive valid output after power up.

⁵**Response time:** The time taken by the transducer to change output from 10 % to 90 % of full scale in response to a 0 % to 100 % full scale step input pressure.

⁶UL marking not currently applicable for all transducers above 60 bar pressure range

TABLE 5. PRESSURE RATINGS

| Bar | | | PSI | | |
|--------------------|---------------------------|-----------------------------|--------------------|---------------------------|-----------------------------|
| Operating Pressure | Overpressure ¹ | Burst Pressure ² | Operating Pressure | Overpressure ¹ | Burst Pressure ¹ |
| 1 to 3 | 6 | 207 | 15 to 43.5 | 87 | 3000 |
| >3 to 12 | 24 | | >43.5 to 174 | 348 | |
| >12 to 60 | 120 | | >174 to 870 | 1740 | |

¹**Overpressure:** The maximum pressure which may safely be applied to the product for it to remain in specification once pressure is returned to the operating pressure range. Exposure to higher pressures may cause permanent damage to the product.

²**Burst Pressure:** The maximum pressure which may be applied without causing escape of pressure media. The product should not be expected to function after exposure to the burst pressure.

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

TABLE 6. SENSOR PRESSURE TYPES

| Pressure Type | Description |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Absolute | Output is calibrated to be proportional to the difference between applied pressure and a fixed reference to a perfect vacuum (absolute zero pressure). |
| Sealed gage ¹ | Sensor construction is identical to the absolute version with a built-in reference at zero pressure in order to minimize measurement error over temperature. The output is calibrated to be proportional to the difference between applied pressure and a reference of 1 standard atmosphere (1.012 barA 14.7 psiA). Example: 100 psi sealed gage has a calibrated pressure range from 14.7 psi absolute to 114.7 psi absolute. |

¹ Sealed gage option only available in pressure ranges at or above 8 bar | 100 psi.

Figure 2. Nomenclature and Order Guide

For example, **MIPDN1XX010BSDAX** defines a MIP Series, Heavy Duty, Media-Isolated pressure transducer with digital output, with cable electrical connector type, 1/4-18 NPT pressure port type, 10 bar pressure range, sealed gage pressure reference, and digital I²C output.

MIP D N1 X X 010B S DA X¹

Series
MIP Media Isolated Pressure

Electrical Connector Type
D Digital output with cable (100 mm [3.94 in] length)²

Pressure Port Type

| | |
|------------------------------------------------------------------------------|-----------------------------------------------------|
| F1 7/16-20 UNF 1/4 inch 45° Flare Female Schrader (SAE J512) | N2 1/8-27 NPT (ANSI/ASME B1.20.1) |
| G1 G1/4 A-G ³ (ISO 1179-3) | R1 R1/4-19 BSPT BSPT (ISO 7-1) |
| G2 G1/4 A-L ³ (ISO 1179-2) | R2 R1/8-28 BSPT BSPT (ISO 7-1) |
| M1 M12 x 1.5 ³ (ISO 6149-3) | S1 9/16-18 UNF ³ (SAE J1926-2) |
| M3 M14 x 1.5 ³ (ISO 6149-2) | S2 7/16-20 UNF ³ (SAE J1926-2) |
| N1 1/4-18 NPT (ANSI/ASME B1.20.1) | S3 3/8-24 UNF ³ (SAE J1926-2) |

Special
X

Output Transfer Function
DA I²C Digital output
DB SPI Digital output

Pressure Reference
A Absolute
S Sealed gage⁴

Pressure Range

| bar | | psi | |
|--------------------|--------------------|---------------------|---------------------|
| 001B 1 bar | 020B 20 bar | 015P 15 psi | 500P 500 psi |
| 002B 2 bar | 025B 25 bar | 030P 30 psi | 600P 600 psi |
| 004B 4 bar | 035B 35 bar | 050P 50 psi | 667P 667 psi |
| 006B 6 bar | 040B 40 bar | 060P 60 psi | 700P 700 psi |
| 008B 8 bar | 046B 46 bar | 100P 100 psi | 750P 750 psi |
| 010B 10 bar | 050B 50 bar | 150P 150 psi | 800P 800 psi |
| 012B 12 bar | 055B 55 bar | 200P 200 psi | 850P 850 psi |
| 016B 16 bar | 060B 60 bar | 250P 250 psi | 870P 870 psi |
| | | 300P 300 psi | |

Special
X

¹ Contact Honeywell Sales for custom configurations.

² Digital output with cable. Manufacturer part number is S1SST-06-28-GF-04.50-D-NDS.

³ Other external seal materials are available for G1, G2, M1, M3, S1, S2, and S3 Pressure Port Types.

⁴ Sealed gage option only available in pressure ranges at or above 8 bar | 100 psi.

CAUTION PRODUCT DAMAGE DUE TO MISUSE


- Ensure torque specifications are determined for the specific application. Values provided are for reference only. (Mating materials and thread sealants can result in significantly different torque values from one application to the next.)
- Use appropriate tools (such as an open-ended wrench or deep well socket) to install transducers.
- Ensure that the proper mating electrical connector with a seal is used to connect the transducer. Improper or damaged seals can compromise ingress protection, leading to short circuits.
- Ensure that filters are used upstream of the transducers to keep media flow free of particulates. MIP Series transducers are dead-end devices. Particulate accumulation may clog the port or damage the diaphragm.
- Ensure that the transducer is mounted in a vertical position with the process connection (pressure port) downward to avoid particular deposits.
- Ensure that the media does not create a residue when dried. Build-up of residue inside the transducer may affect its output.
- Ensure that the transducer housing is properly grounded.
- For cable harness versions, ensure that the cable bend radius is maintained at a minimum of 38 mm [1.50 in] in the end application assembly.

Failure to comply with these instructions may result in product damage.

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

1.0 PINOUT AND FUNCTIONALITY (SEE TABLE 7.)

TABLE 7. PINOUT AND FUNCTIONALITY

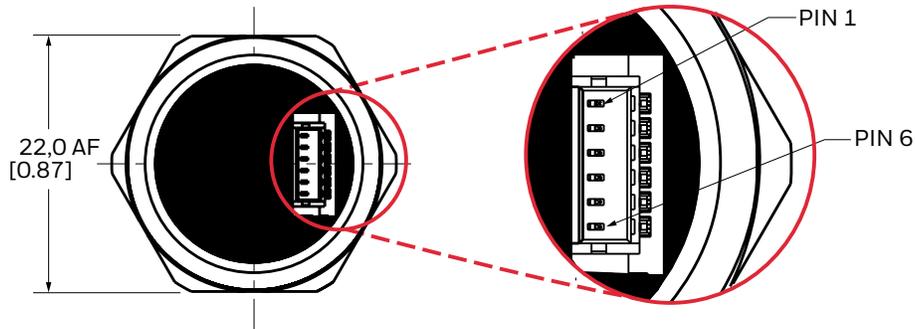

| Pin Number | I ² C | | SPI | |
|------------|------------------|---------------------------------|-----------------|---------------------------------|
| | Name | Description | Name | Description |
| 1 | V _{DD} | Positive supply voltage | V _{DD} | Positive supply voltage |
| 2 | SDA | Data in/out | MOSI | Master Out/Sensor In |
| 3 | SCL | Clock input | SCK | Clock input |
| 4 | GND | Ground reference voltage signal | GND | Ground reference voltage signal |
| 5 | NC | No connection | MISO | Master In/Sensor Out |
| 6 | NC | No connection | SS | Sensor Select, Chip Select |

NOTICE


- Ensure proper connection to avoid permanent damage.
- Connect appropriate damping resistor at master side to avoid signal ringing/overshoot.

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

2.0 I²C COMMUNICATIONS

2.1 I²C BUS CONFIGURATION (SEE FIGURE 3)

Figure 3. I²C Bus Configuration

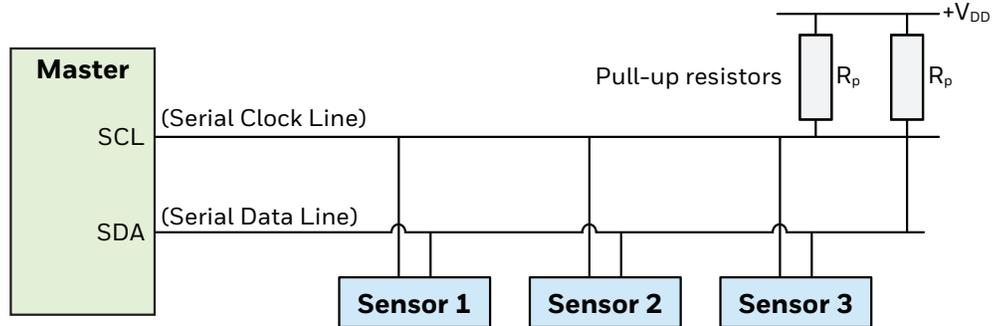

2.2 I²C DATA TRANSFER

The MIP Series I²C will only respond to requests from a Master device. Following the address and read bit from the Master, these sensors are designed to output up to seven bytes of data. The first data byte is the Status Byte (8-bit), the second to fourth bytes are the Compensated Pressure Output (24-bit), and the fifth to seventh bytes are the compensated temperature output (24 bit).

2.3 I²C SENSOR ADDRESS

Each MIP Series I²C is referenced on the bus by a 7-bit sensor address. The default address is 00Hex. Custom addresses are available. (Please contact Honeywell Customer Service with questions regarding custom sensor addresses.)

2.4 I²C PRESSURE AND TEMPERATURE READING

To begin communication, the Master generates a START condition and sends the sensor address followed by a read bit (1). After the sensor generates an acknowledge, it will transmit up to 4 bytes of data. The first data byte is the Status Byte (8-bit), the second to fourth bytes are the Compensated Pressure Output (24-bit), and the fifth to seventh bytes are the compensated temperature output (24 bit).

The Master must acknowledge the receipt of each byte and can terminate the communication by sending a Not Acknowledge (NACK) bit followed by a Stop bit after receiving the required bytes of data.

2.5 I²C OUTPUT MEASUREMENT COMMAND (SEE TABLE 8)


To communicate with the MIP Series I²C using an Output Measurement Command of "0xAA", followed by "0x00" "0x00", follow the steps shown in Table 8. This command causes the device to exit Standby/Sleep Mode and enter Operating/Active Mode. The time required for the sensor from exiting Standby/Sleep Mode and to initiate communication is 10 μs max. At the conclusion of the measurement cycle, the device will automatically re-enter Standby/Sleep Mode.

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

TABLE 8. I²C COMMAND REQUEST

| Step | Action |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; gap: 5px;"> <div style="border: 1px solid black; padding: 2px;">S</div> <div style="border: 1px solid black; padding: 2px;">SensorAddr</div> <div style="border: 1px solid black; padding: 2px;">0</div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">Command</div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">P</div> </div> <div style="margin: 2px 0;">↑ Write bit</div> <div style="display: flex; align-items: center; gap: 5px;"> <div style="border: 1px solid black; padding: 2px;">S</div> <div style="border: 1px solid black; padding: 2px;">SensorAddr</div> <div style="border: 1px solid black; padding: 2px;">0</div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">Command</div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">CmdData <15:8></div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">CmdData <7:0></div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">P</div> </div> <div style="margin: 2px 0;">↑ Write bit</div> </div> |
| 2 | <p>Option 1: Wait until the busy flag in the Status Byte clears. Option 2: Wait for at least 5 ms for the data conversion to occur.</p> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; gap: 5px;"> <div style="border: 1px solid black; padding: 2px;">S</div> <div style="border: 1px solid black; padding: 2px;">SensorAddr</div> <div style="border: 1px solid black; padding: 2px;">1</div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">Status</div> <div style="border: 1px solid black; padding: 2px;">N</div> <div style="border: 1px solid black; padding: 2px;">P</div> </div> <div style="margin: 2px 0;">↑ Read bit</div> </div> |
| 3 | <div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; gap: 5px;"> <div style="border: 1px solid black; padding: 2px;">S</div> <div style="border: 1px solid black; padding: 2px;">SensorAddr</div> <div style="border: 1px solid black; padding: 2px;">1</div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">Status</div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">SensorData <23:16></div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">SensorData <15:8></div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">SensorData <7:0></div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">TempData <23:16></div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">TempData <15:8></div> <div style="border: 1px solid black; padding: 2px;">A</div> <div style="border: 1px solid black; padding: 2px;">TempData <7:0></div> <div style="border: 1px solid black; padding: 2px;">N</div> <div style="border: 1px solid black; padding: 2px;">P</div> </div> <div style="margin: 2px 0;">↑ Read bit</div> </div> |

Figure 4. I²C Timing Configuration

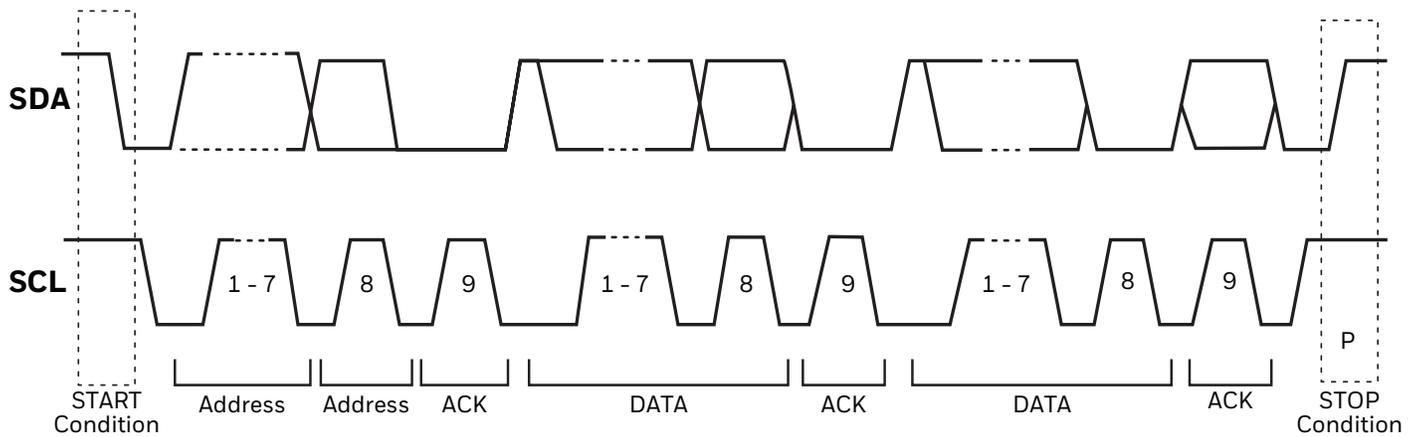


DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

3.0 SPI COMMUNICATIONS

3.1. SPI BUS CONFIGURATION (SEE FIGURE 5)


Figure 5. SPI Bus Configuration

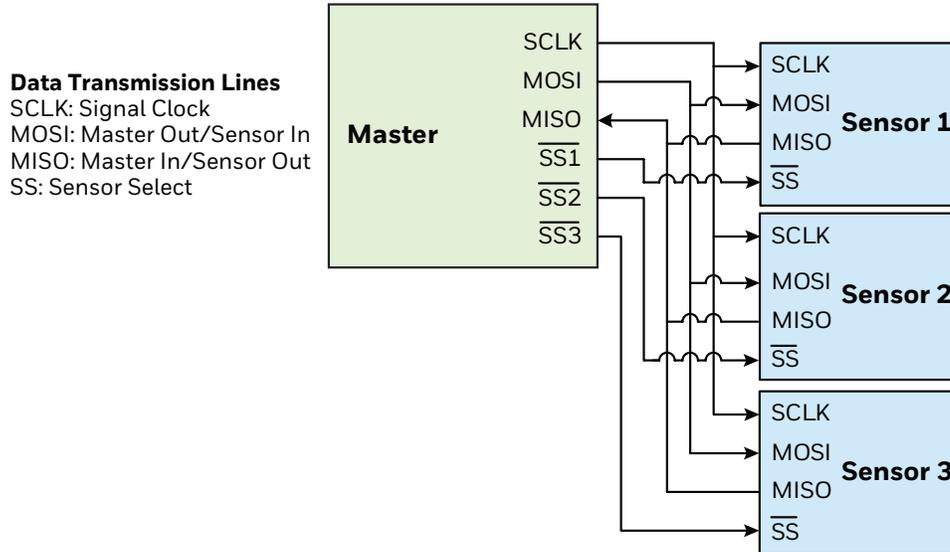

3.2 SPI DATA TRANSFER (SEE FIGURE 6)

Communicate with the MIP Series SPI sensors by de-asserting the Sensor Select (SS) line. At this point, the sensor is no longer idle, and will begin sending data once a clock is received. MIP Series SPI sensors are configured for SPI operation in mode 0 (clock polarity is 0 and clock phase is 0). SPI operation in mode 1 (clock polarity is 0 and clock phase is 1), mode 2 (clock polarity is 1 and clock phase is 0), and mode 3 (clock polarity is 1 and clock phase is 1) is also available. (Contact Honeywell Sales for custom configurations.)

Figure 6. Example of 1 Byte SPI Data Transfer

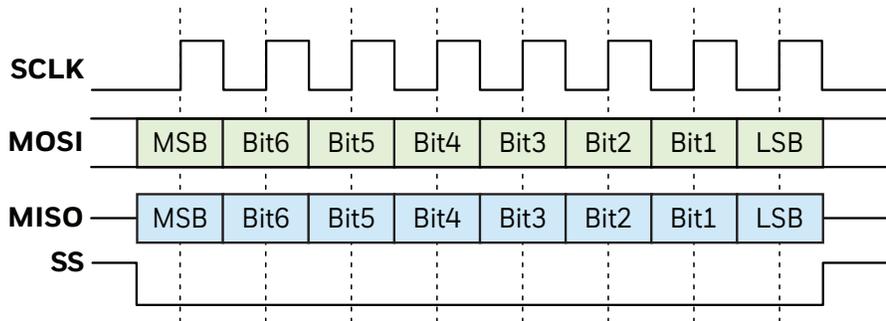

3.3 SPI PRESSURE AND TEMPERATURE READING

To read out the compensated pressure and temperature reading, the Master generates the necessary clock signal after activating the sensor with the Sensor Select (SS) line. The sensor will transmit up to 7 bytes of data. The first data byte is the Status Byte (8-bit), the second to fourth bytes are the compensated pressure output (24-bit) and the fifth to seventh bytes are the Compensated Temperature Output (24-bit). The Master can terminate the communication by stopping the clock and deactivating the SS line.

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

3.4 SPI COMMUNICATION (SEE TABLE 9)

TABLE 9. SPI OUTPUT MEASUREMENT COMMAND

| Step | Action | | Notes | | | | | | | |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------|-------------------|-------------------|------------------------|-------------------|-------------------|--|
| 1 | The data on MISO depend on the preceding command. Discard the data on the MISO line. | | <ul style="list-style-type: none"> NOP Command is "0xF0". | | | | | | | |
| | MOSI | <table border="1"> <tr> <td>0xAA</td> <td>0x00</td> <td>0x00</td> </tr> <tr> <td>Command other than NOP</td> <td>CmdData <15:8></td> <td>CmdData <7:0></td> </tr> </table> | | 0xAA | 0x00 | 0x00 | Command other than NOP | CmdData <15:8> | CmdData <7:0> | |
| | 0xAA | 0x00 | | 0x00 | | | | | | |
| Command other than NOP | CmdData <15:8> | CmdData <7:0> | | | | | | | | |
| MISO | <table border="1"> <tr> <td>Status</td> <td>Data</td> <td>Data</td> </tr> </table> | Status | Data | Data | | | | | | |
| Status | Data | Data | | | | | | | | |
| 2 | Option 1: Wait until the busy flag in the Status Byte clears. Option 2: Wait for at least 5 ms for the data conversion to occur. | | | | | | | | | |
| | MOSI | <table border="1"> <tr> <td>Command = NOP</td> </tr> </table> | Command = NOP | | | | | | | |
| Command = NOP | | | | | | | | | | |
| | MISO | <table border="1"> <tr> <td>Status</td> </tr> </table> | Status | | | | | | | |
| Status | | | | | | | | | | |
| 3 | MOSI | <table border="1"> <tr> <td>Command = NOP</td> <td>00_{Hex}</td> <td>00_{Hex}</td> <td>00_{Hex}</td> <td>00_{Hex}</td> <td>00_{Hex}</td> <td>00_{Hex}</td> </tr> </table> | Command = NOP | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | |
| | Command = NOP | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | 00 _{Hex} | | | |
| MISO | <table border="1"> <tr> <td>Status</td> <td>SensorData <23:16></td> <td>SensorData <15:8></td> <td>SensorData <7:0></td> <td>TempData <23:16></td> <td>TempData <15:8></td> <td>TempData <7:0></td> </tr> </table> | Status | SensorData <23:16> | SensorData <15:8> | SensorData <7:0> | TempData <23:16> | TempData <15:8> | TempData <7:0> | | |
| Status | SensorData <23:16> | SensorData <15:8> | SensorData <7:0> | TempData <23:16> | TempData <15:8> | TempData <7:0> | | | | |

TABLE 10. SPI INTERFACE PARAMETERS

| Characteristic | Description |
|-----------------------------------------------------------------------------------------------|-------------|
| Input rising and falling edge slew rate | 1 V/ns |
| Delay time ¹ between SS-activation edge and first edge of SLCK, MOSI or MISO | 50 ns |
| Delay time ¹ between SS-deactivation edge and last edge of SLCK, MOSI or MISO | 50 ns |
| Delay between SS-deactivation edge of last command and of SS-activation edge for next command | 10 μs |

¹ Typical for conditions with no clocks prior to and after the command and data bytes.

TABLE 11. I²C AND SPI MODES STATUS

| Bit (Meaning) | Status | Comment |
|---------------------------------|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| 7 | Always 0 | — |
| 6 (Power indication) | 1 = Device is powered 0 = Device is not powered | — |
| 5 (Busy flag) | 1 = Device is busy | Indicates that the data from the last command is not yet available. No new commands are processed if the device is busy. |
| 4 | 0 = CMD/Debug mode 1 = Sleep mode | Mode Status CMD/Debug mode is reserved for Honeywell. |
| 3 | Always 0 | Mode Status |
| 2 (Memory integrity/error flag) | 0 = Integrity test passed 1 = Integrity test failed | Indicates whether check sum-based integrity test passed or failed. The memory error status bit is calculated only during power up sequence. |
| 1 | Always 0 | — |
| 0 (Math Saturation) | 1 = Internal math saturation has occurred | — |

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

4.0 PRESSURE AND TEMPERATURE CALCULATIONS


4.1 SENSOR OUTPUT AT SIGNIFICANT PERCENTAGES (SEE TABLE 12)

TABLE 12. SENSOR OUTPUT AT SIGNIFICANT PERCENTAGES

| Output (%) | Digital Counts | | Output (°C) | Digital Counts | |
|------------|----------------|--------|-------------|----------------|--------|
| | Decimal | Hex | | Decimal | Hex |
| 0 | 1677722 | 19999A | -40 | 0 | 0 |
| 25 | 5033165 | 4CCCCD | 0 | 4067203 | 3E0F83 |
| 50 | 8388608 | 800000 | 25 | 6609205 | 64D935 |
| 75 | 11744051 | B33333 | 85 | 12710011 | C1F07B |
| 100 | 15099494 | E66666 | 125 | 16777215 | FFFFFF |

4.2 OUTPUT TRANSFER FUNCTION (SEE FIGURE 7)

Figure 7. Output Transfer Function

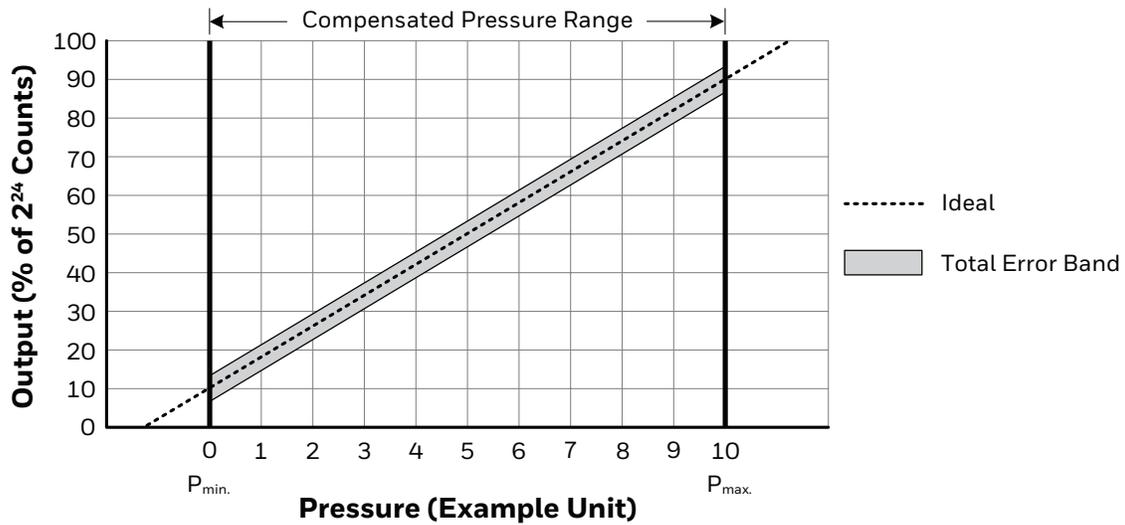

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

4.3 PRESSURE EXAMPLES

$$\text{Pressure} = \frac{(\text{Output} - \text{Output}_{\min.}) * (P_{\max.} - P_{\min.})}{\text{Output}_{\max.} - \text{Output}_{\min.}} + P_{\min.}$$

Where:

Output_{max.} = output at maximum pressure [counts]

Output_{min.} = output at minimum pressure [counts]

P_{max.} = maximum value of pressure range [bar/psi]

P_{min.} = minimum value of pressure range [bar/psi]

Pressure = pressure reading [bar/psi]

Output = digital pressure reading [counts]

Example 1: Calculate the pressure for a 10 bar absolute sensor with a pressure output of 8388608 (decimal) counts.

$$5 \text{ bar} = \frac{(8388608 - 1677722) * (10 - 0)}{15099494 - 1677722} + 0$$

Example 2: Calculate the pressure for a 25 bar sealed gage sensor with a pressure output of 8388608 (decimal) counts.

$$13.5135 \text{ bar} = \frac{(8388608 - 1677722) * (26.0135 - 1.0135)}{15099494 - 1677722} + 1.0135$$

4.4 TEMPERATURE EXAMPLE

$$\text{Temperature} = \frac{T_{\text{out}} * (T_{\max.} - T_{\min.})}{2^{24}} + T_{\min.}$$

Example: Calculate the temperature for a temperature output of 6291456 (decimal) counts. Where:

Temperature = calculated temperature output in °C

T_{out} = digital temperature output in counts (decimal)

T_{max.} = 125°C



T_{min.} = -40°C

$$21.875^{\circ}\text{C} = \frac{6291456 * (125 - (-40))}{2^{24}} + (-40)$$

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES


Figure 8. Mounting Dimensions (For Reference Only) mm [in]

Product Marking

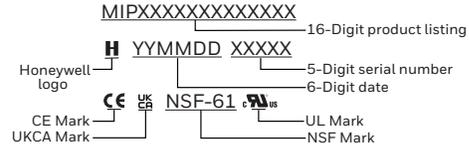


F1: 7/16-20 UNF 1/4 inch 45° Flare Female Schrader (SAE J512)

Seal: 45° cone
Mating geometry: SAE J512
Installation torque: 17 N m [12 ft-lb]
Weight: 37 g [1.3 oz]




G1: G1/4 A-G (ISO 1179-3)

Seal: O-ring (included) and retaining ring ISO 1179-3-G1/4 (not included)
Mating geometry: ISO 1179-1
Installation torque: 20 N m [14.7 ft-lb]
Weight: 34 g [1.2 oz]

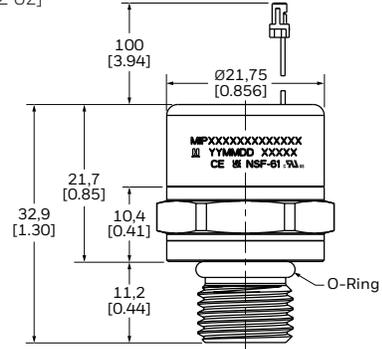


G2: G1/4 A-L (ISO 1179-2)

Seal: ISO 9974-2/DIN 3869 profile ring (included)
Mating geometry: ISO 1179-1
Installation torque: 20 N m [15 ft-lb]
Weight: 37 g [1.3 oz]

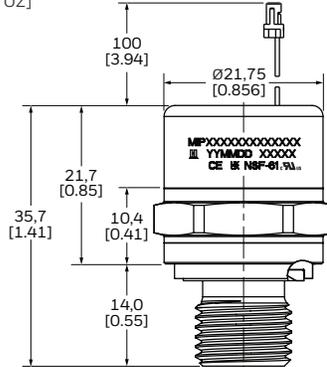


M1: M12 x 1.5 (ISO 6149-3)

Seal: O-ring (included)
Mating geometry: ISO 6149-1
Installation torque: 20 N m [15 ft-lb]
Weight: 35 g [1.2 oz]

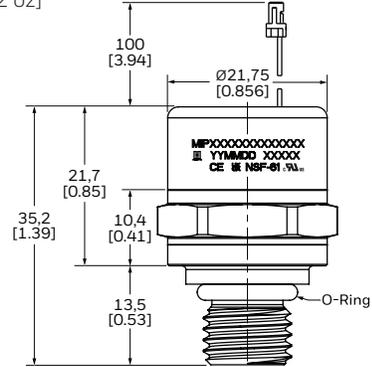


M3: M14 x 1.5 (ISO 6149-2)

Seal: O-ring (included)
Mating geometry: ISO 6149-1
Installation torque: 30 N m [22.1 ft-lb]
Weight: 40 g [1.4 oz]

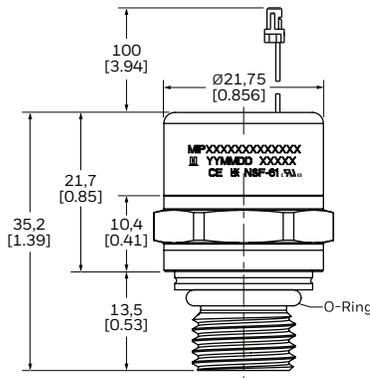

N1: 1/4-18 NPT

Seal: Pipe thread
Mating geometry: ANSI B1.20.1
Installation torque: Two to three turns from finger tight
Weight: 39 g [1.4 oz]

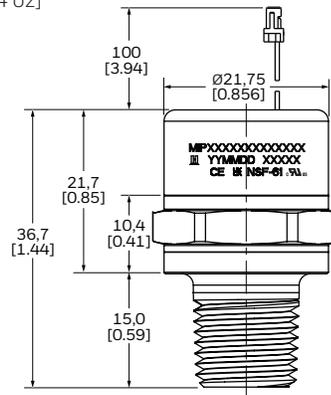

DIGITAL OUTPUT, HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS MIP SERIES

Figure 8. Mounting Dimensions (For Reference Only) mm [in], continued


N2: 1/8-27 NPT

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 31 g [1.1 oz]

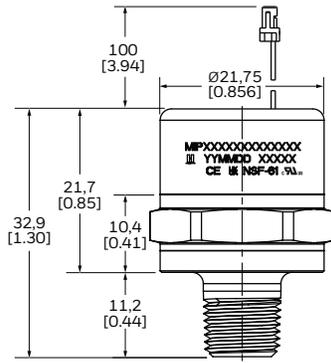


R1: R1/4-19 BSPT (ISO 7-1)

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 37 g [1.3 oz]

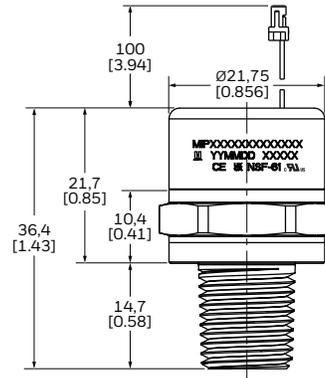


R2: R1/8-28 BSPT (ISO 7-1)

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 30 g [1.1 oz]




S1: 9/16-18 UNF (SAE J1926-2)

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 30 N m [22.1 ft-lb]

Weight: 45 g [1.6 oz]

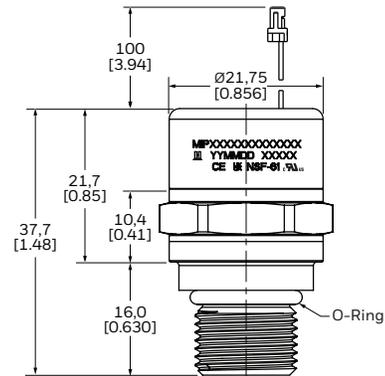


S2: 7/16-20 UNF (SAE J1926-2)

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 18 N m [13.3 ft-lb]

Weight: 37 g [1.3 oz]

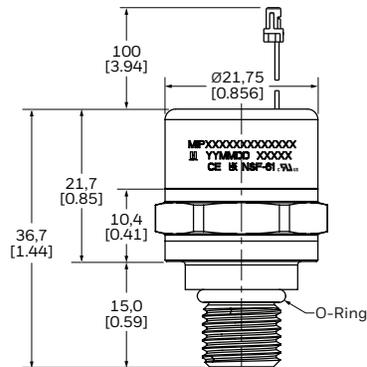


S3: 3/8-24 UNF (SAE J1926-2)

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 10 N m [7.4 ft-lb]

Weight: 33 g [1.2 oz]

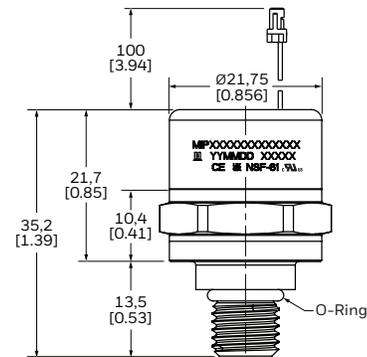

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective.

The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While Honeywell may provide information or engineering support for its products through Honeywell personnel, literature and website, it is the buyer's sole responsibility to determine the suitability of the Honeywell product(s) for the buyer's requirements.

Specifications may change without notice. The information we supply is believed to be accurate as of this writing. However, Honeywell assumes no responsibility for its use.

For more information

Honeywell Sensing Solutions services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit our [website](#) or call:

| | |
|---------------|---------------------|
| USA/Canada | +1 302 613 4491 |
| Latin America | +1 305 805 8188 |
| Europe | +44 1344 238258 |
| Japan | +81 (0) 3-6730-7152 |
| Singapore | +65 6355 2828 |
| Greater China | +86 4006396841 |

Honeywell Sensing Solutions

830 East Arapaho Road
Richardson, TX 75081
www.honeywell.com

WARNING PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.