

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00		D	REVISED PER ECR-18-003203	19JUL2018	BDA	GJ

D

D

C


C

B



B

A




A

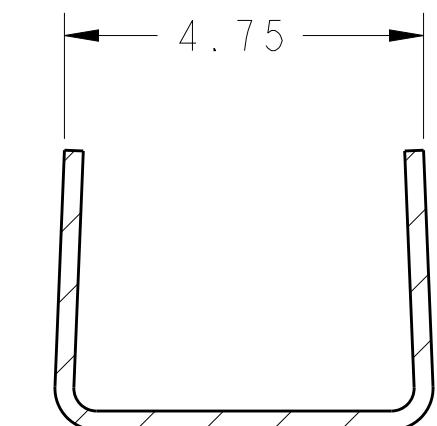

SECTION E-E

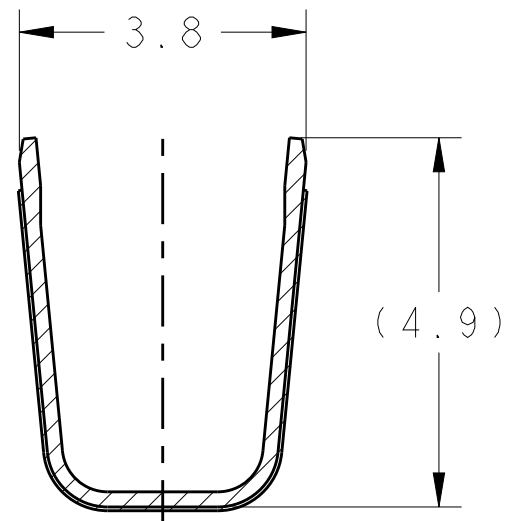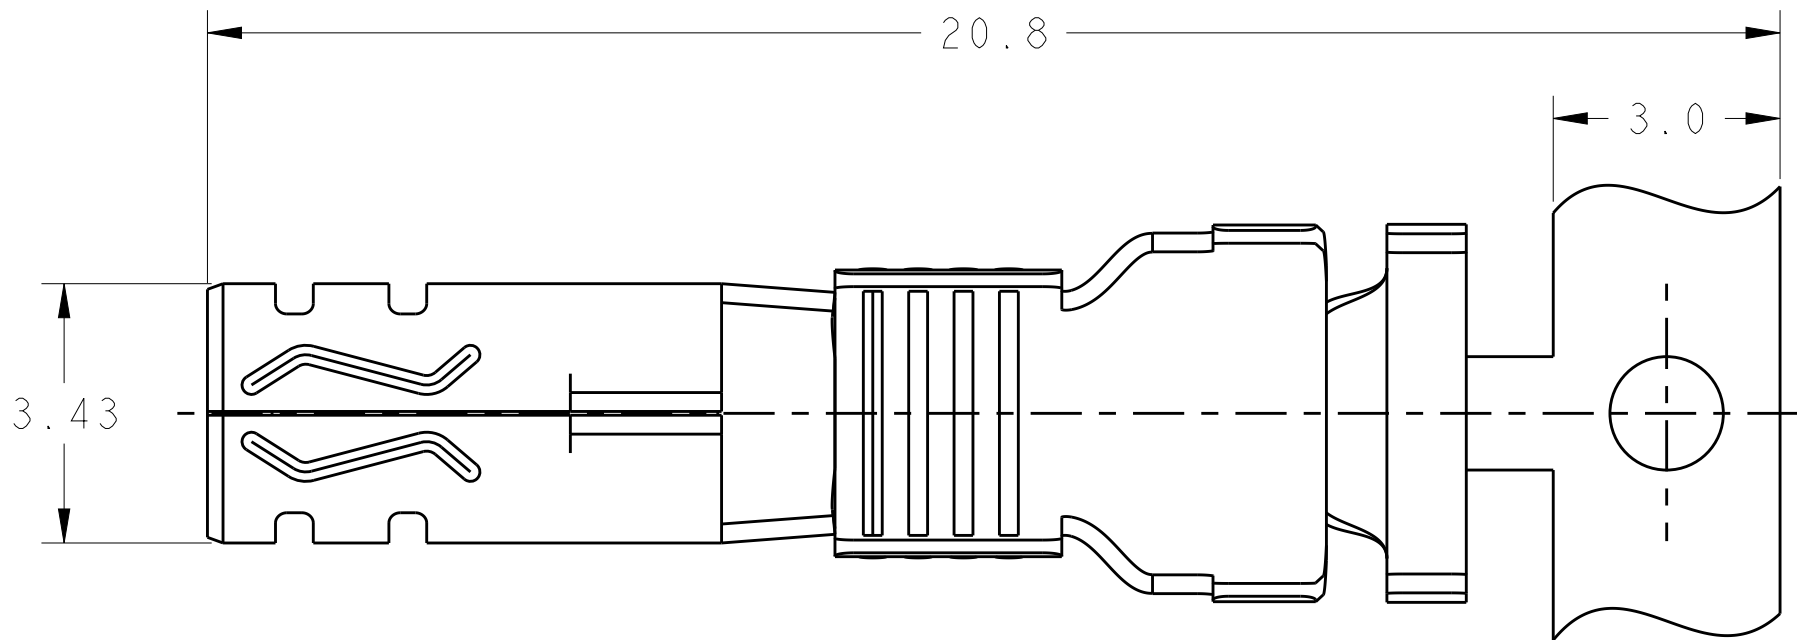


SECTION C-C

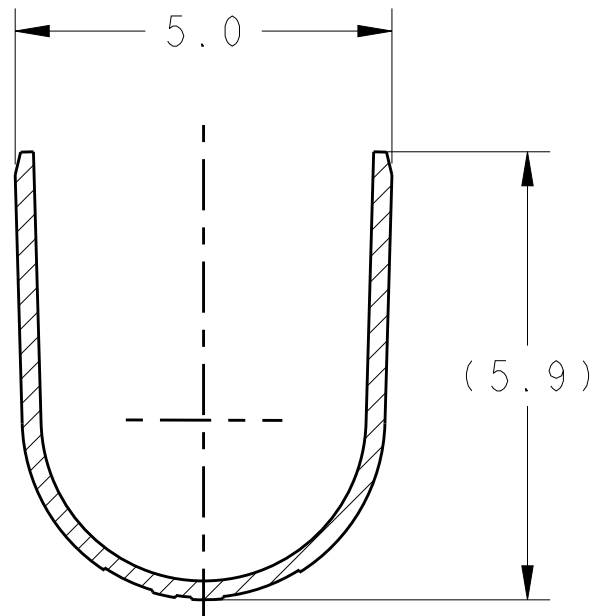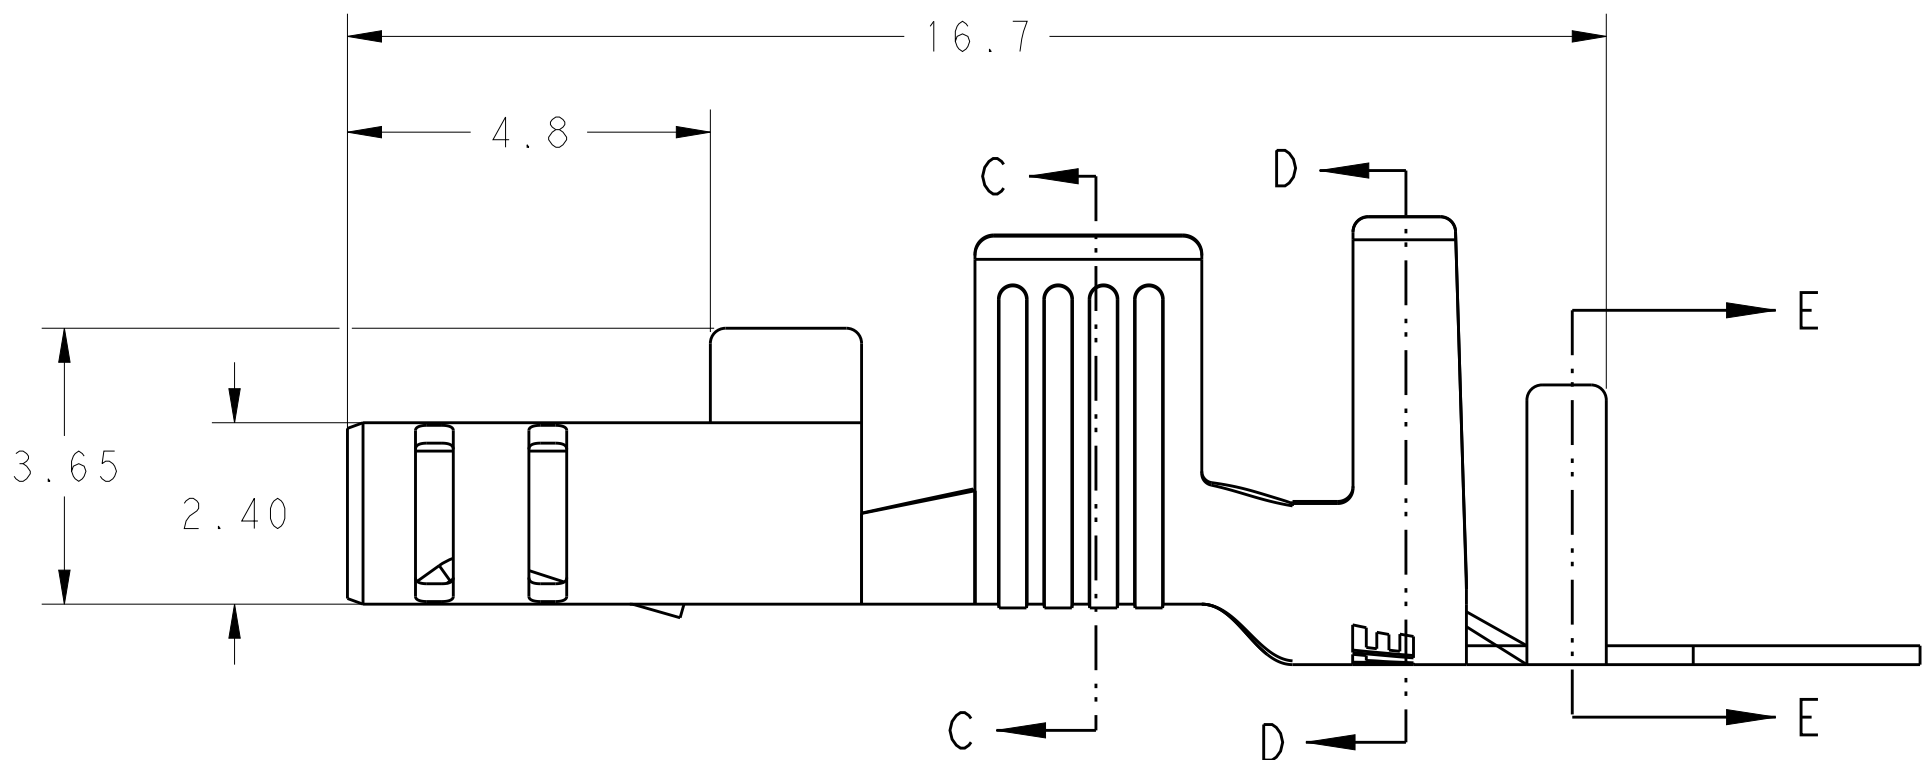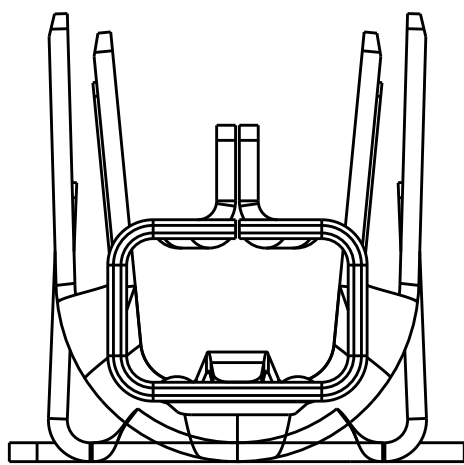

SECTION D-D

MATERIAL MARK

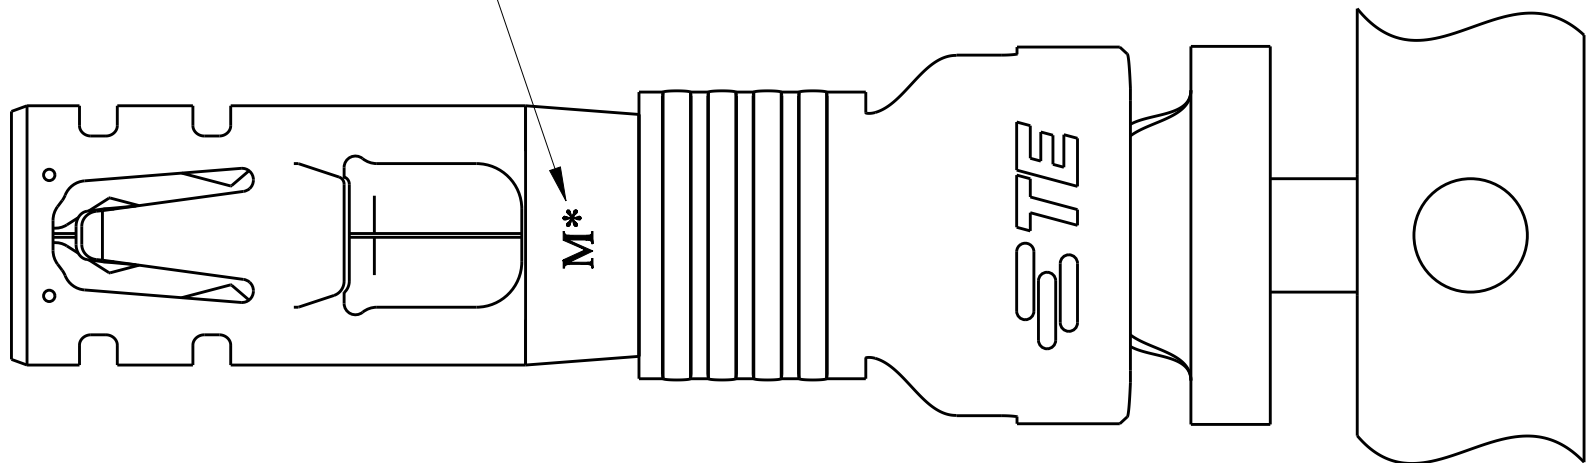

1. MATERIAL: COPPER ALLOY, PRE TIN PLATING.
2. APPLICABLE WIRE: 12AWG COPPER STRANDED.
3. APPLICABLE INSULATION DIAMETER: 3.85~4.25mm.
4. APPLICABLE MATED PLUG HOUSING P/N:
-1971773-/*-1971776-*/*-1971876-*/
/*-2232265-*/*-2232266-*/*-2232357-*

5. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

△ SUPERSEDED BY 1971779-2

HIGH(150°C)	M0	1971779-2
STANDARD(105°C)	M4	1971779-1
TEMP. RATING	MATERIAL MARK	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	11JUL2012	STE TE Connectivity		
		CHK	11JUL2012			
DIMENSIONS:		APVD	11JUL2012	NAME		
mm		YUJHONG MAO				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	108-106118	RECEPTACLE CONTACT POWER TRIPLE LOCK		
0 PLC ±		APPLICATION SPEC	114-106118			
1 PLC ±0.5		WEIGHT	-	SIZE		
2 PLC ±0.30		Customer Drawing				
3 PLC ±				CAGE CODE		
4 PLC ±						
ANGLES ±				DRAWING NO		
FINISH ±						
MATERIAL				RESTRICTED TO		
				SCALE		
				SHEET		
				OF		
				REV		