

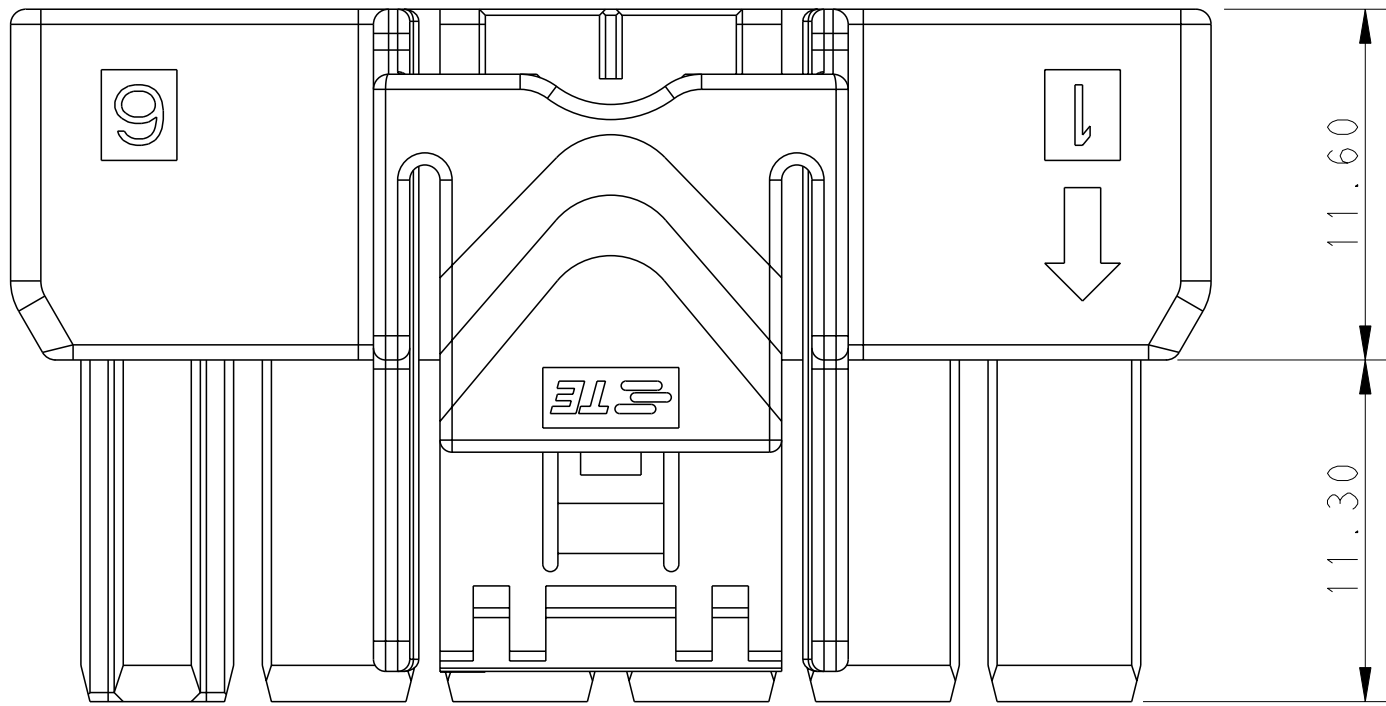
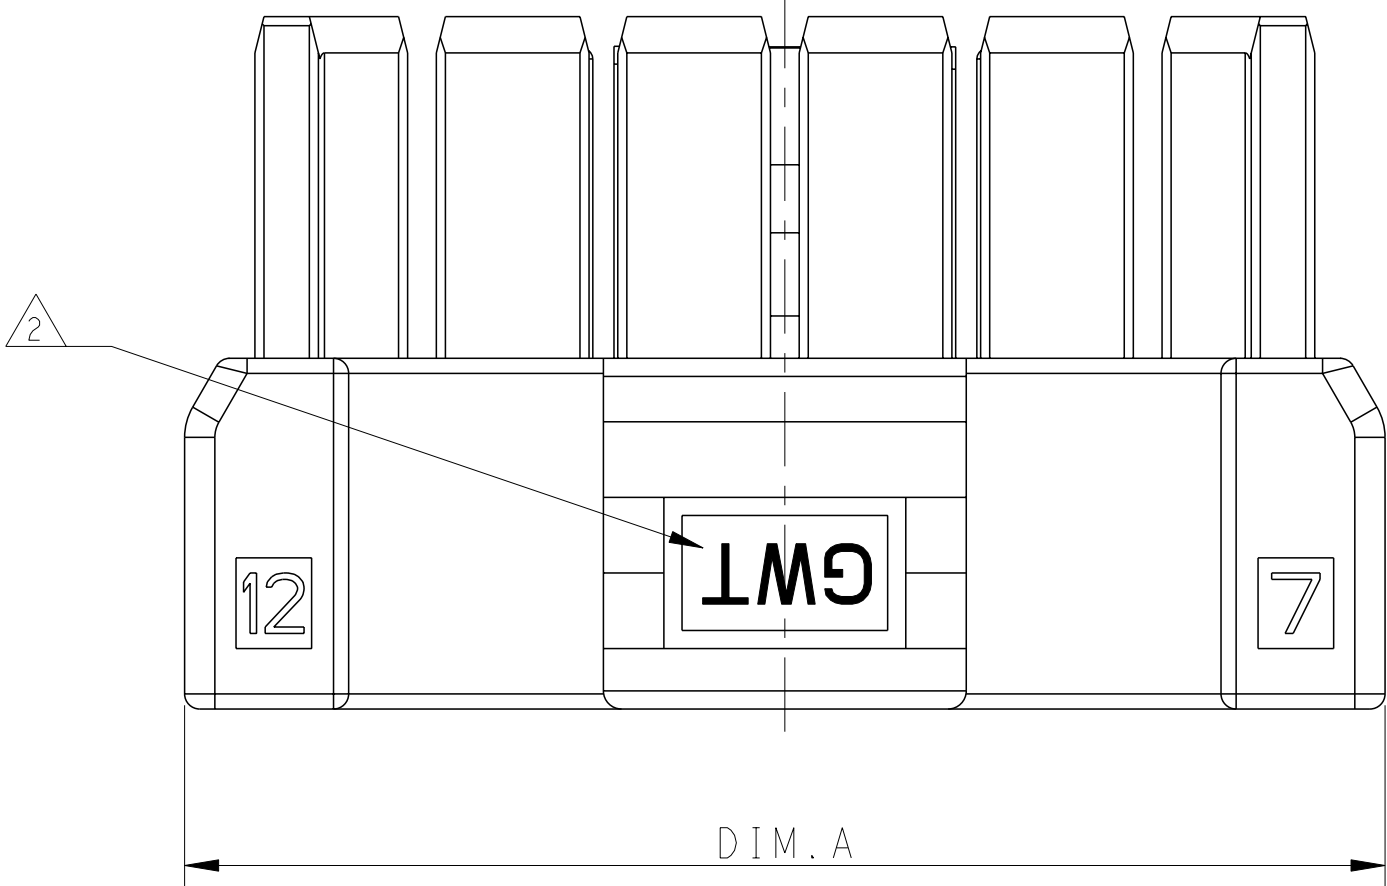
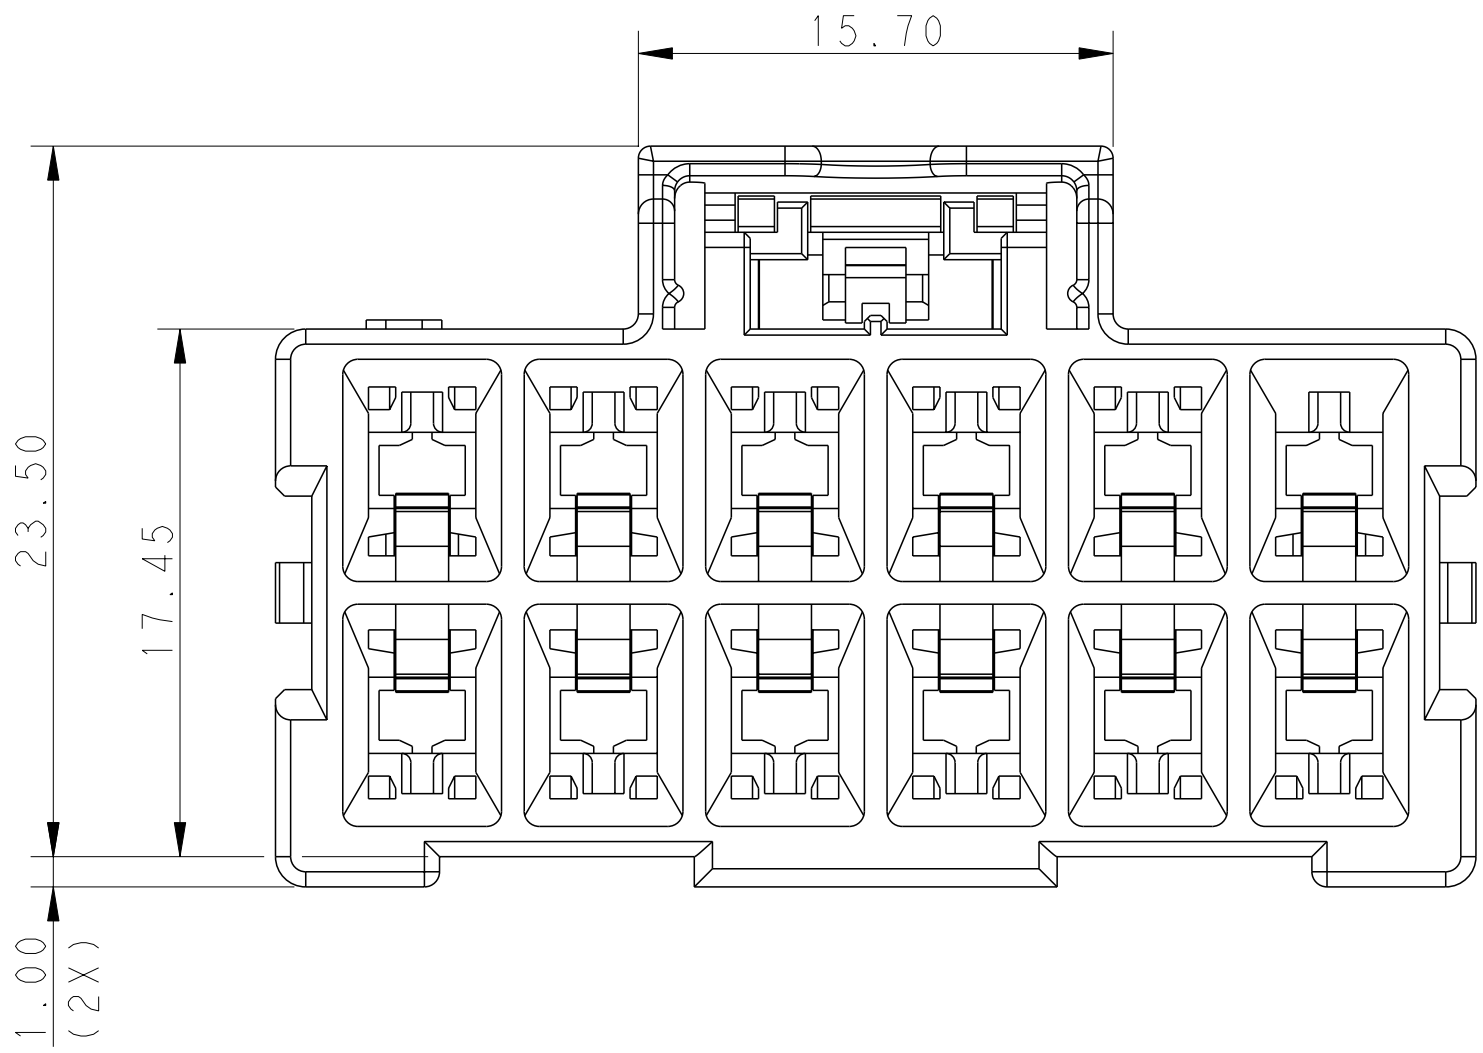


LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED PER ECR-18-016088	15OCT2018	BW	GJ

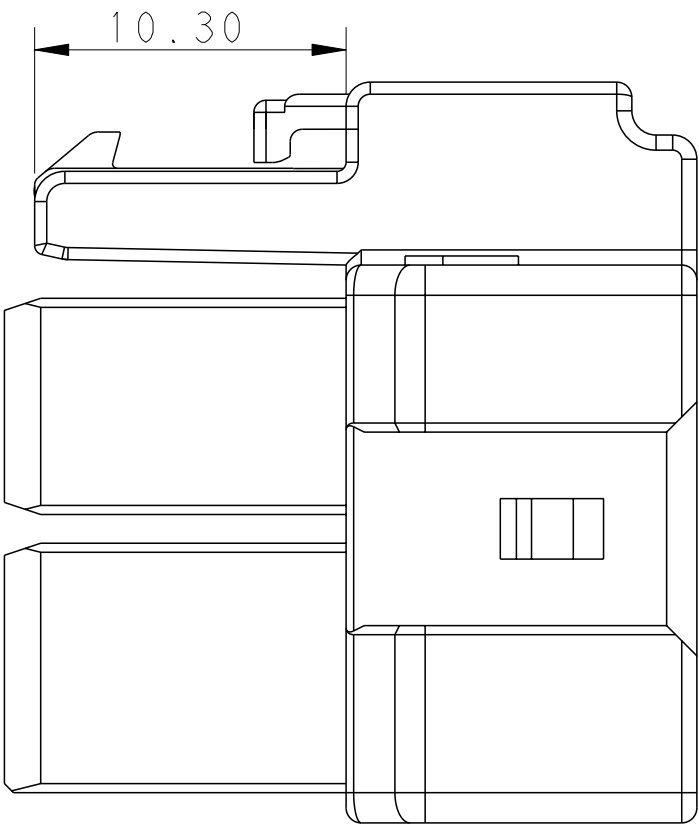

POS.	DIM.A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

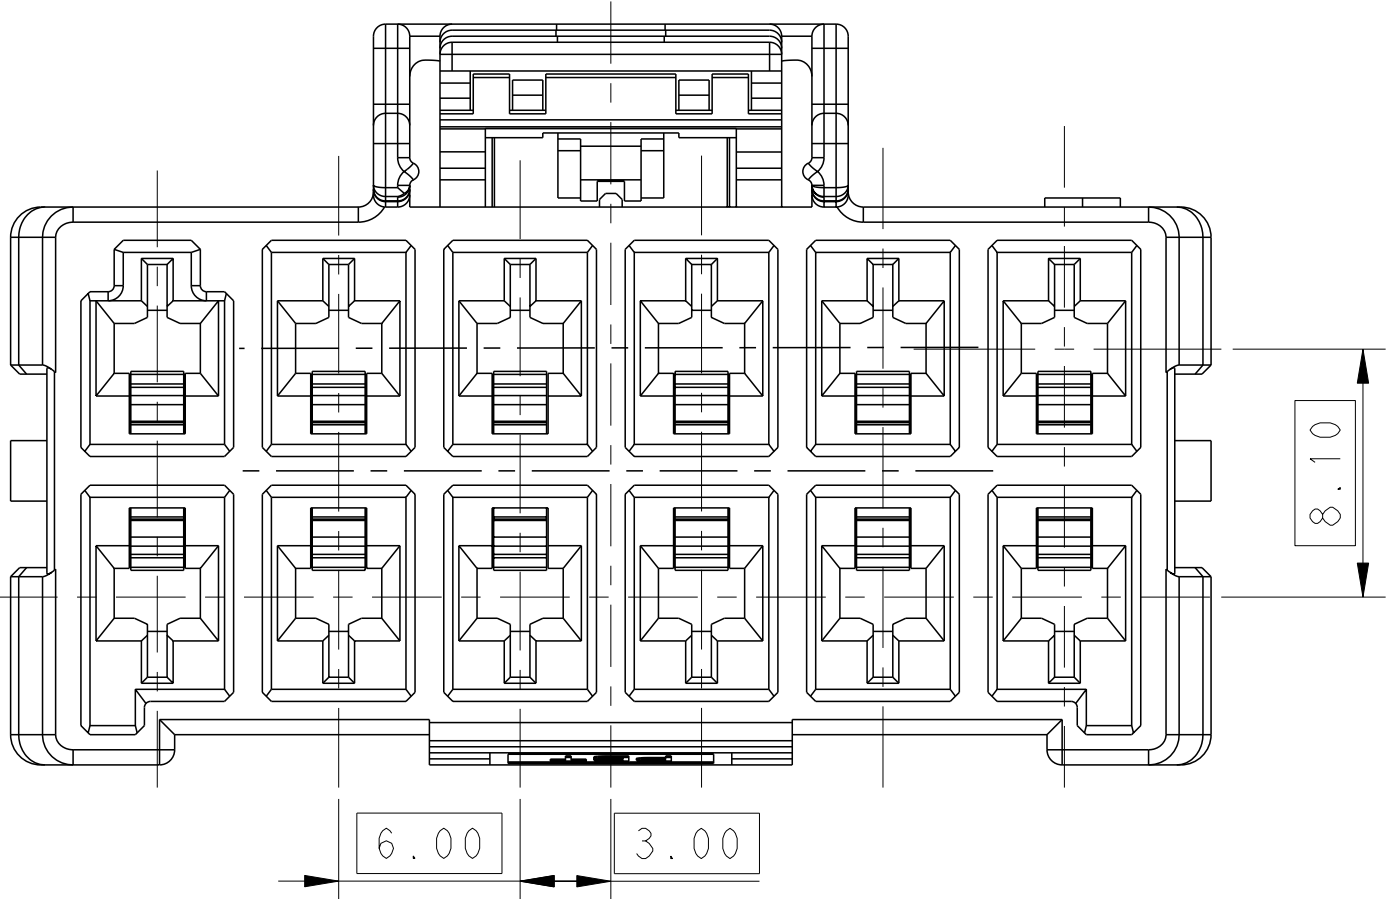

NOTE

1. MATERIAL:
- LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
- LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE PENDING HOT WIRE IGNITION TEST AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2. MATERIAL MARK:
- LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N
- RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*,2238066-*


4. MATING CONN, P/N
- CAP HSG:*-2232359/264-*
- TPA:*-1971778-*

5. This product has not completed validation testing.


6. PRELIMINARY - NOT FOR PRODUCTION

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	TOMMY WU		26MAR2013		 TE Connectivity								
				CHK	HAPYE WU		26MAR2013										
DIMENSIONS:				APVD	YUHONG MAO		26MAR2013		NAME		PLUG HOUSING,DOUBLE ROW POWER TRIPLE LOCK						
mm								PRODUCT SPEC									
				1 P L C				+ .		108-106118							
				1 P L C				± 0.35									
				2 P L C				± 0.25									
				3 P L C				± .									
				4 P L C				± .									
ANGLES				± .				APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
FINISH								114-106118		A1		00779		C=232266			
MATERIAL								WEIGHT									
-								-								-	
								Customer Drawing									


LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-

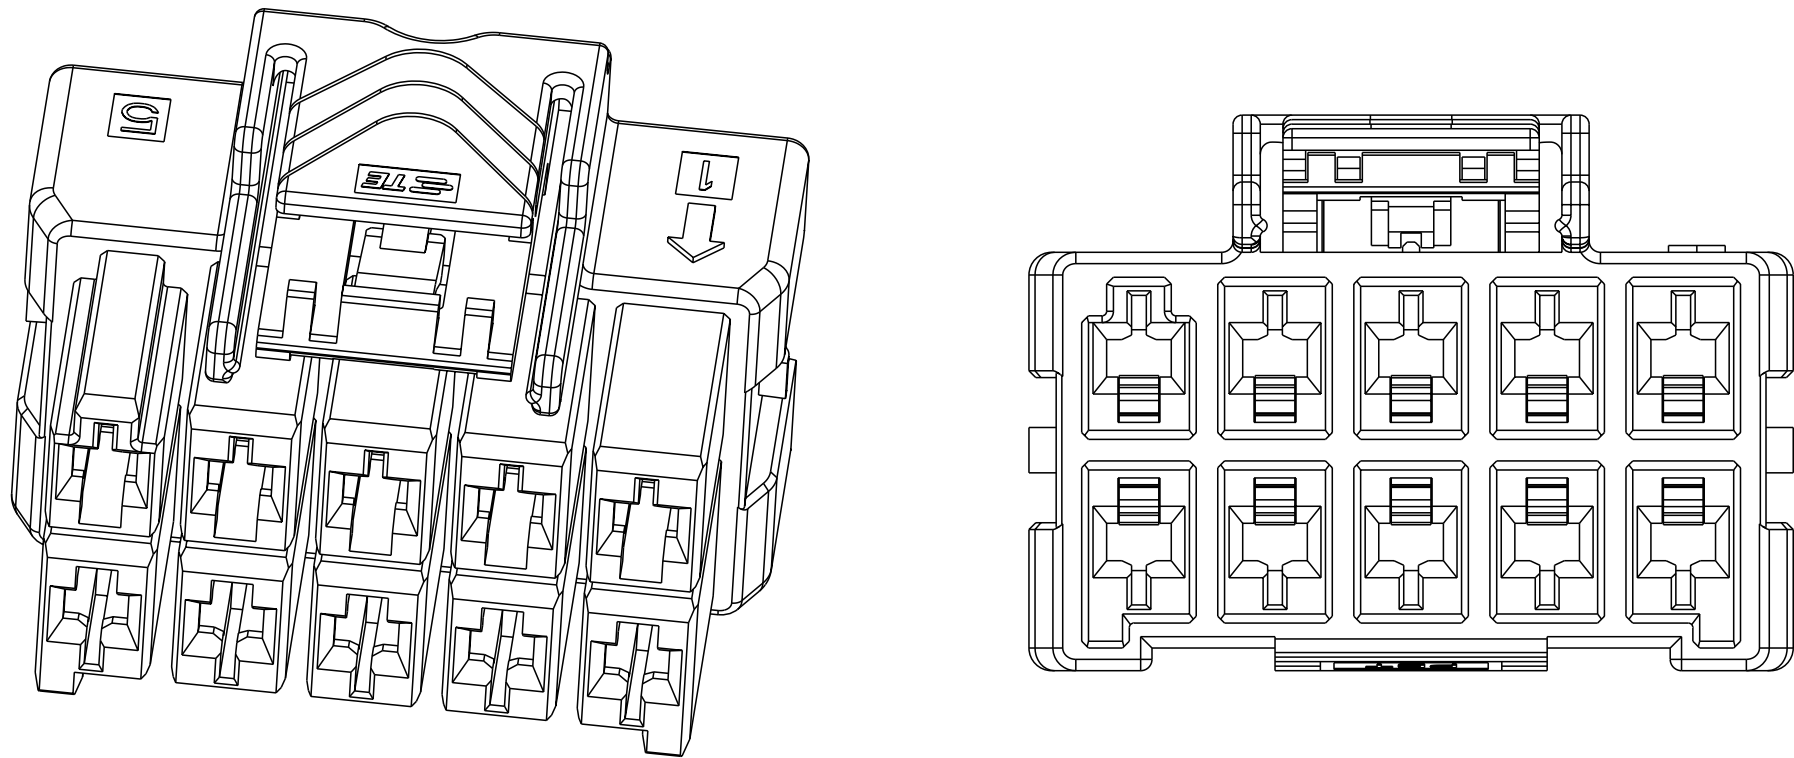


2*5 POSITIONS

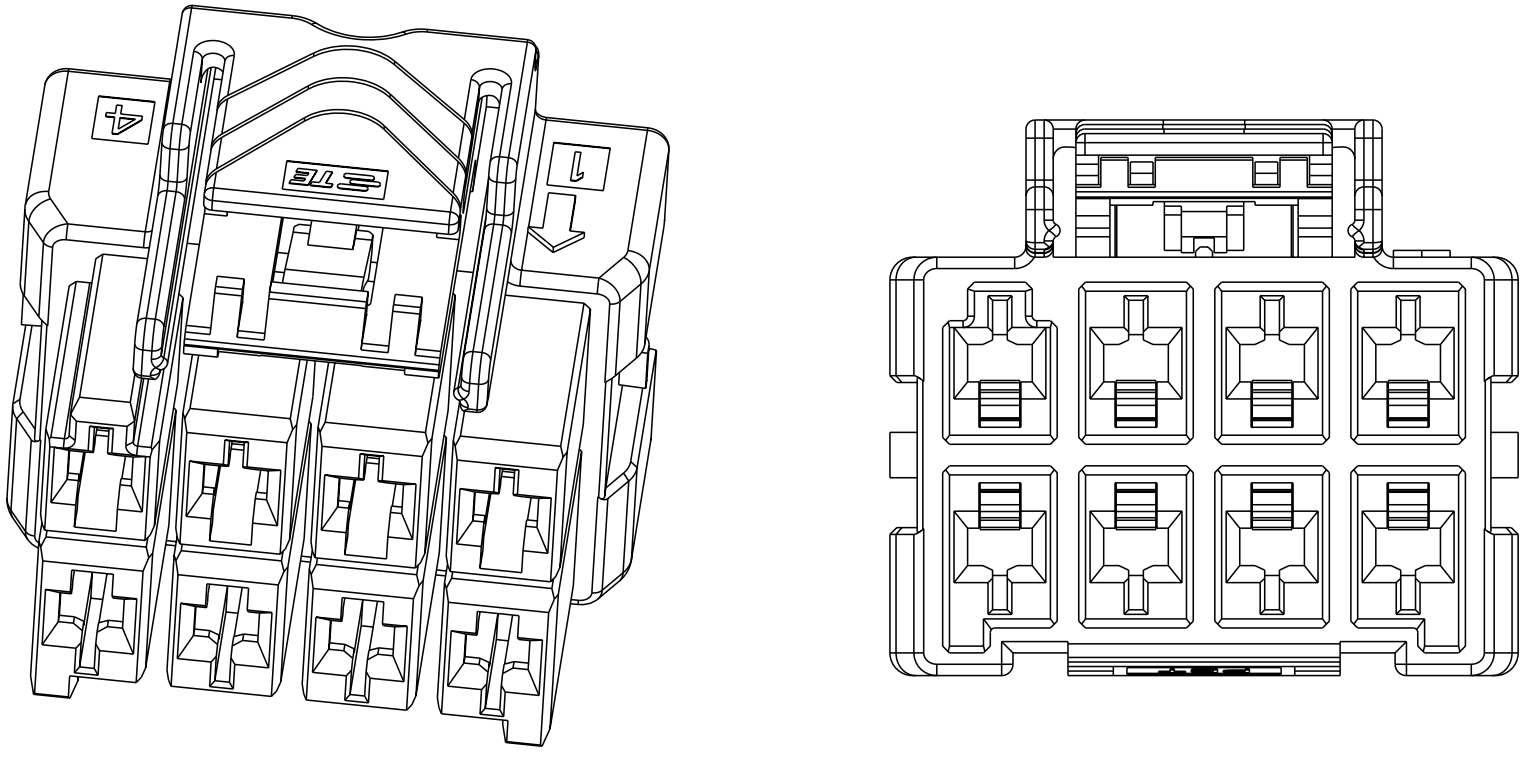


2*4 POSITIONS

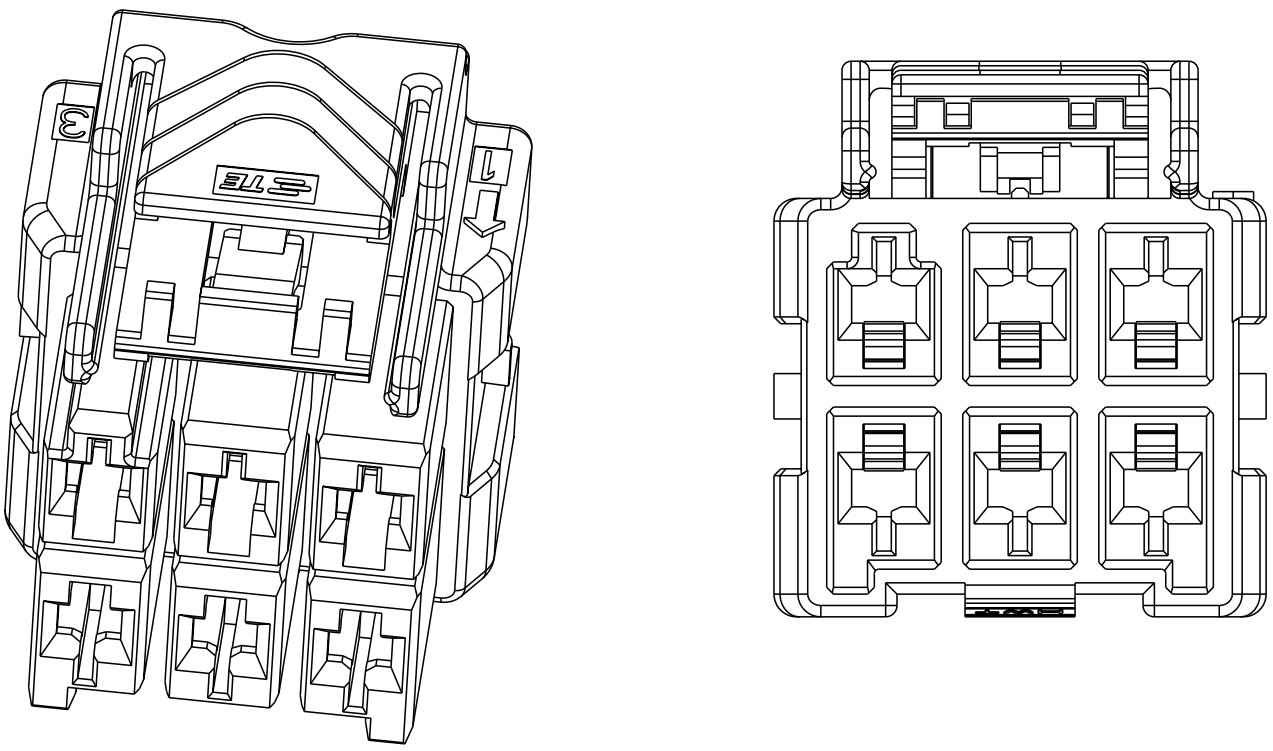


2*3 POSITIONS

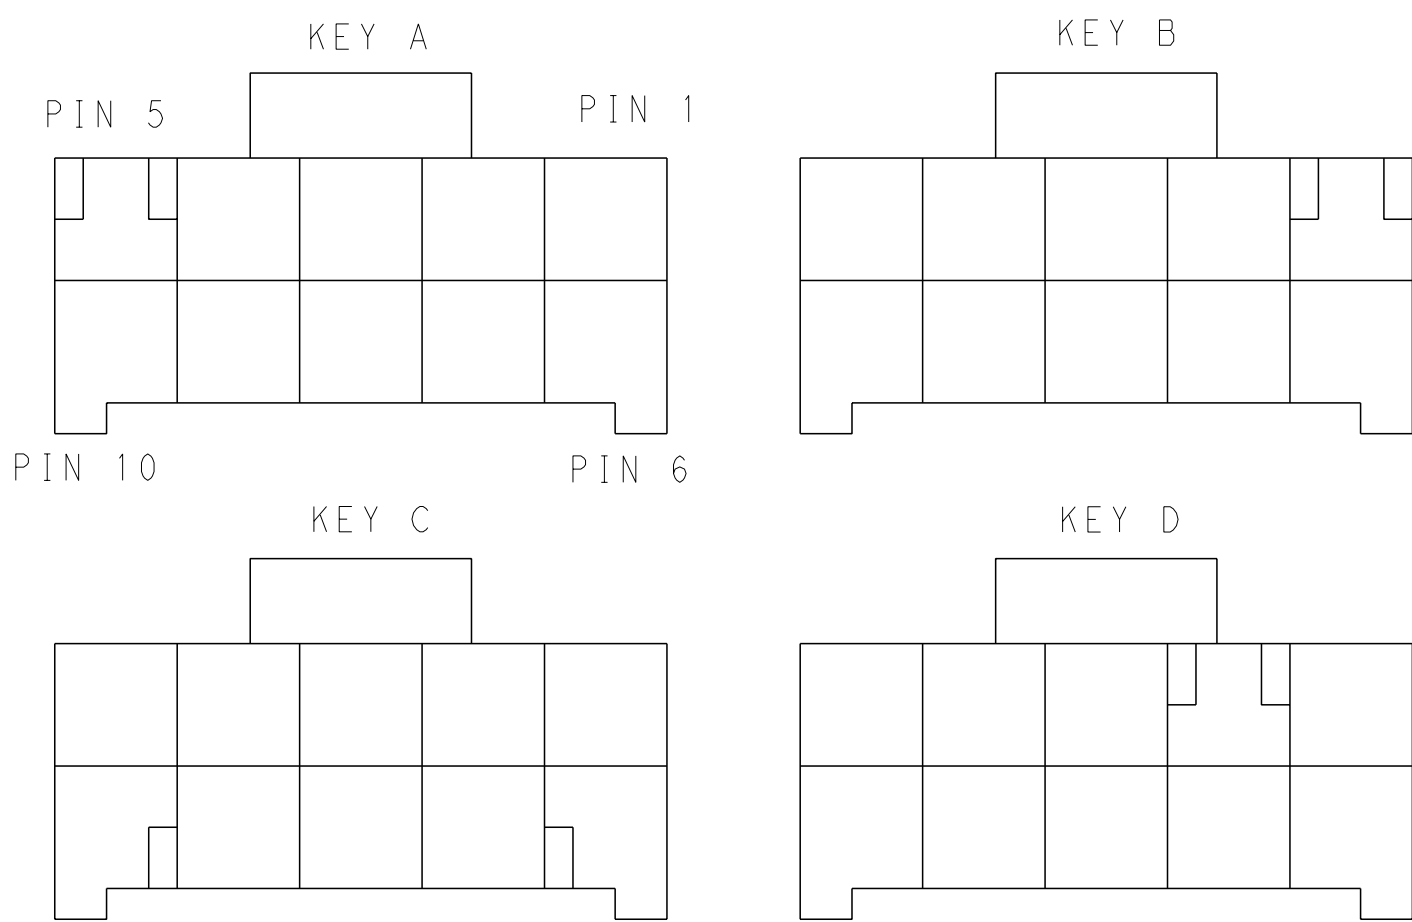


KEYING FOR 2*5 POS.

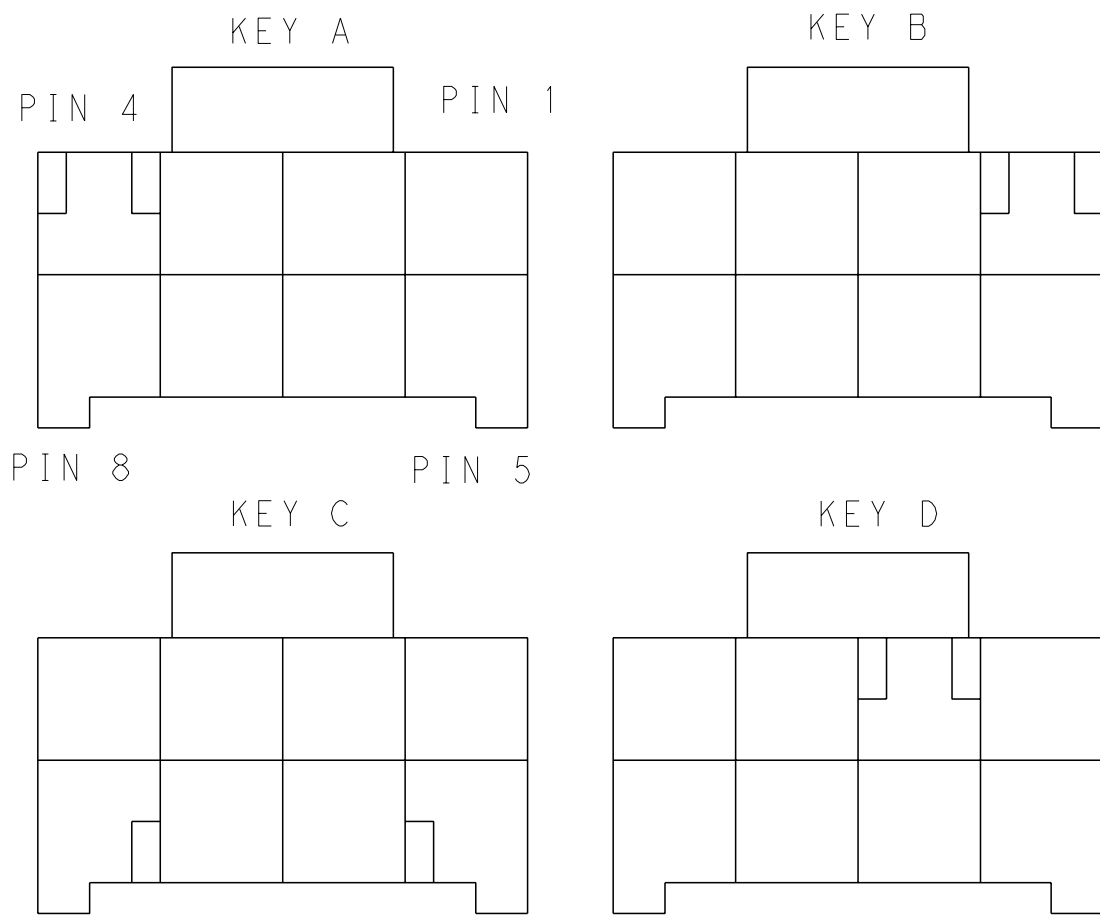


KEYING FOR 2*4 POS.

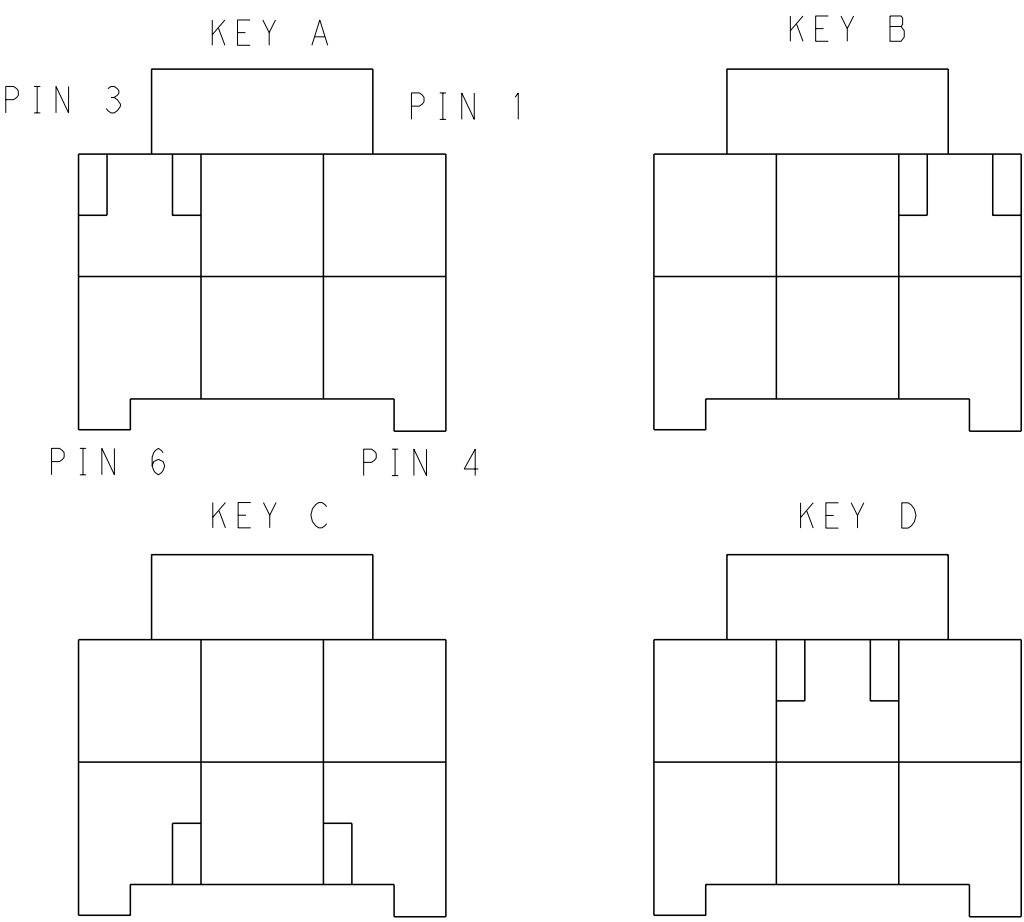

KEYING FOR 2*3 POS.

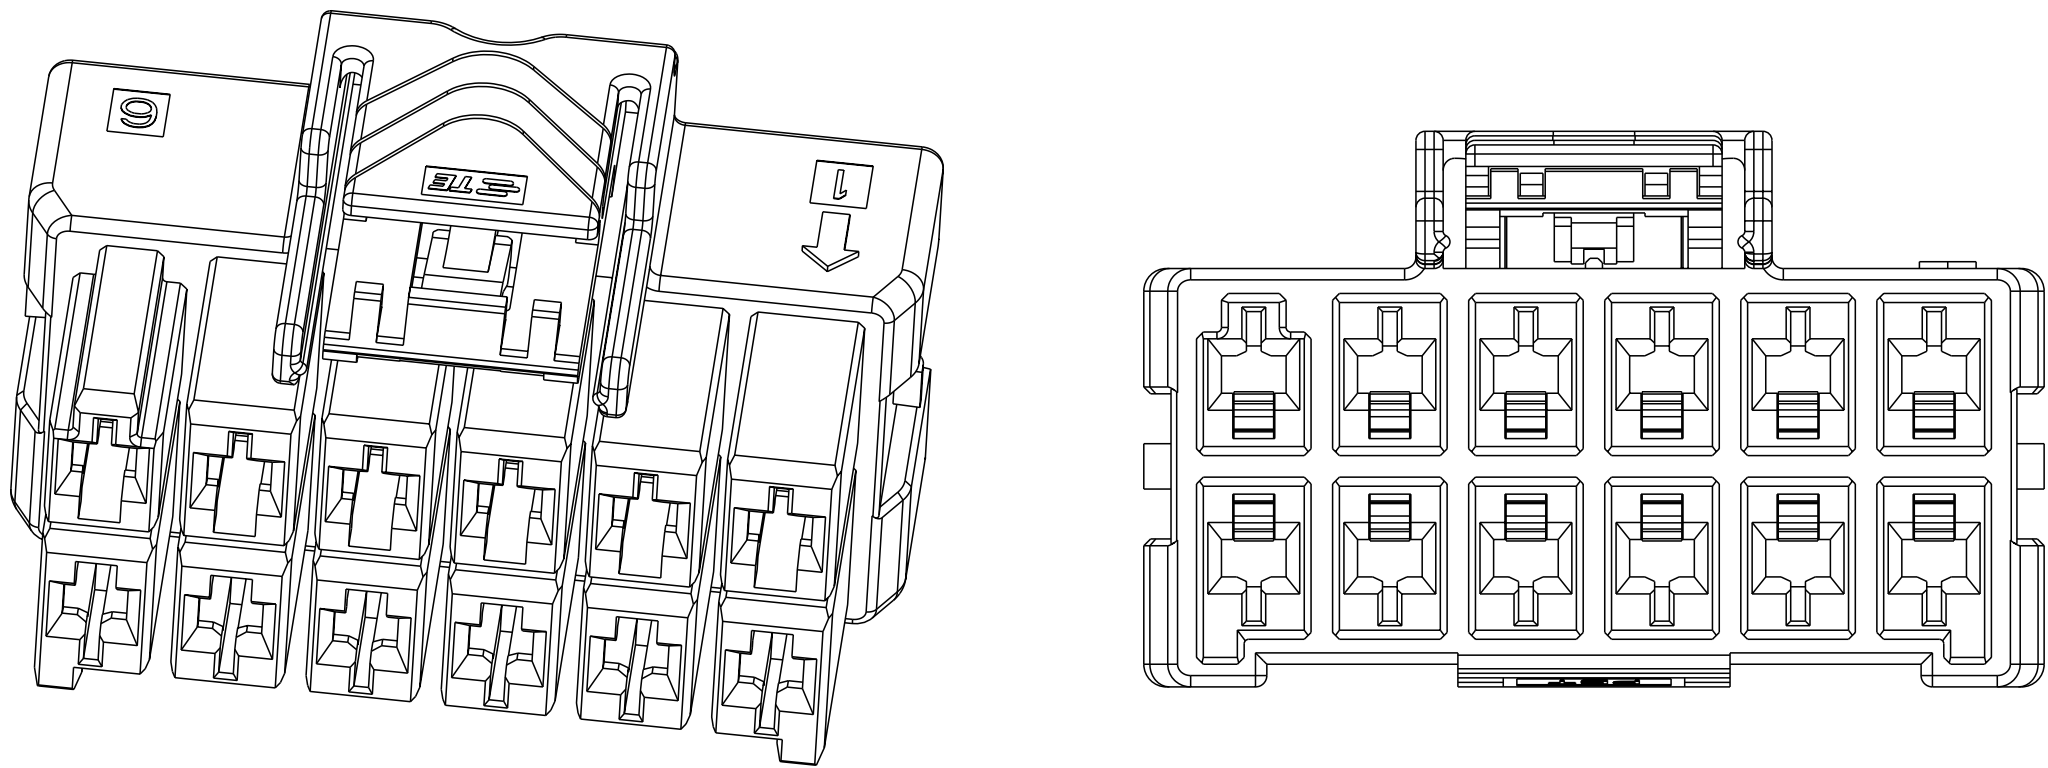

2*6 POSITIONS

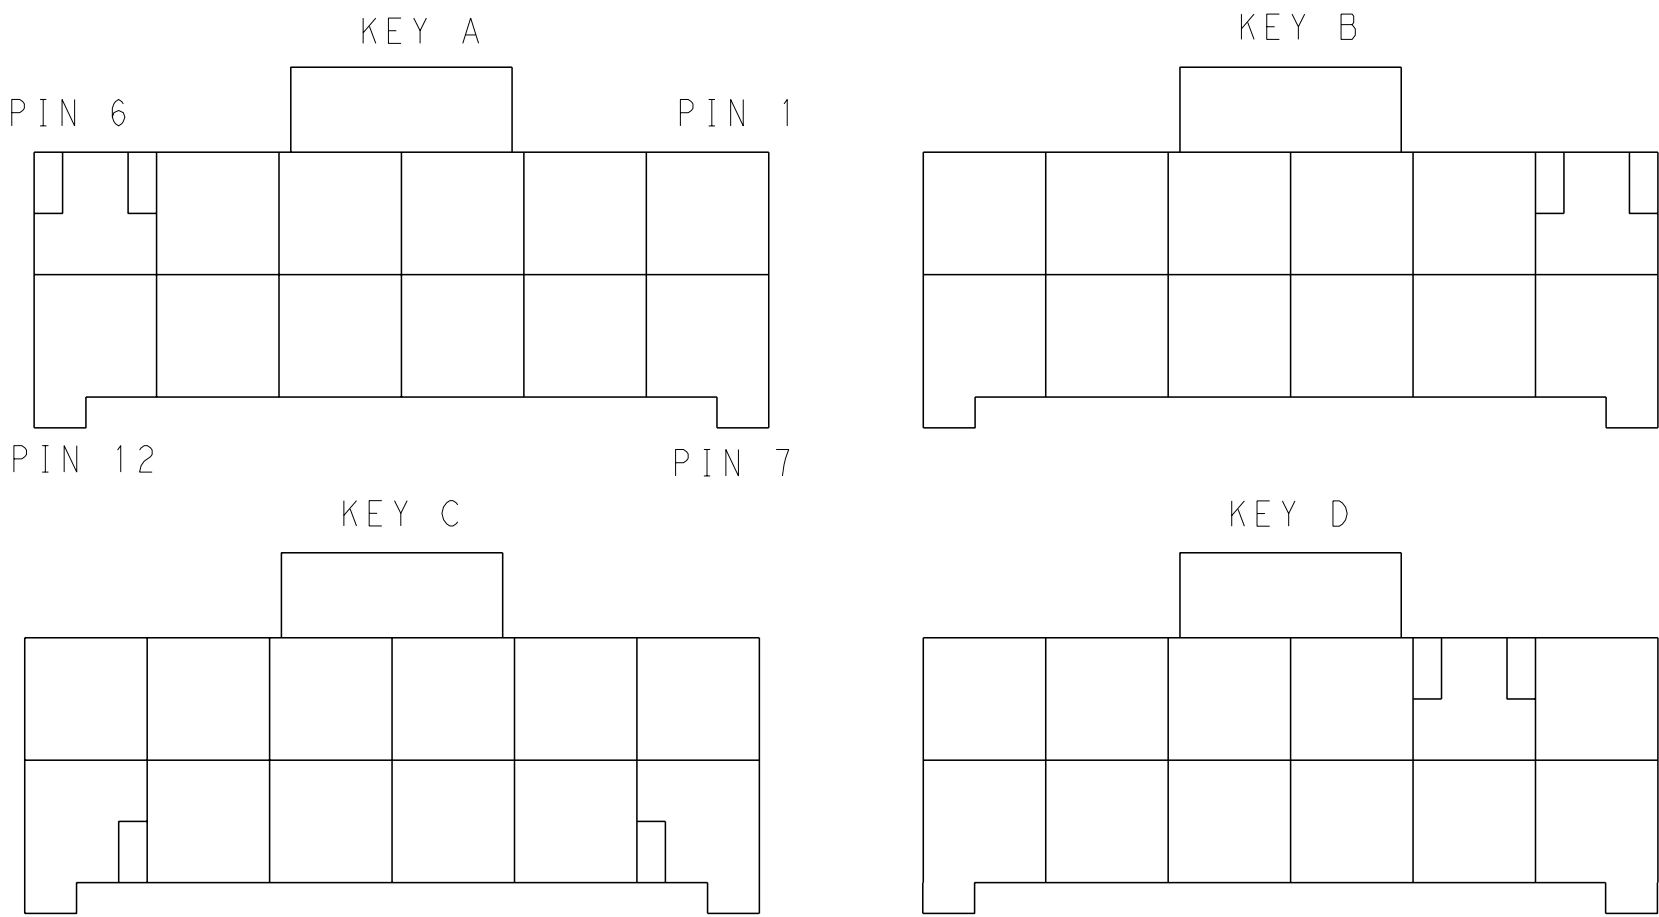

KEYING FOR 2*6 POS.

2*6	LEVEL A	DARK GREY	KEY A	5-2232266-6
		BROWN	KEY B	6-2232266-6
		GREEN	KEY C	7-2232266-6
		ORANGE	KEY D	8-2232266-6
2*5	LEVEL A	DARK GREY	KEY A	5-2232266-5
		BROWN	KEY B	6-2232266-5
		GREEN	KEY C	7-2232266-5
		ORANGE	KEY D	8-2232266-5
POS.	MATERIAL	COLOR	KEY	P/N

2*4	LEVEL A	DARK GREY	KEY A	5-2232266-4
		BROWN	KEY B	6-2232266-4
		GREEN	KEY C	7-2232266-4
		ORANGE	KEY D	8-2232266-4
2*3	LEVEL A	BLACK	KEY A	1-2232266-4
		DARK GREY	KEY A	5-2232266-3
		BROWN	KEY B	6-2232266-3
		GREEN	KEY C	7-2232266-3
2*3	LEVEL B	ORANGE	KEY D	8-2232266-3
		BLACK	KEY A	1-2232266-1
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY_WU 26MAR2013
CHK HAPYE_WU 26MAR2013
APVD YUJHONG_MAO 26MAR2013

DIMENSIONS:

mm

0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES FINISH ±-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

NAME

SIZE CAGE CODE DRAWING NO

RESTRICTED TO

Customer Drawing

SCALE -

SHEET 2 OF 2

REV B1

TE Connectivity

PLUG HOUSING,DOUBLE ROW
POWER TRIPLE LOCK

A100779C=2232266