

Agilent
U2701A and U2702A USB Modular Oscilloscope

Data Sheet



Features

- ✓ 100 MHz and 200 MHz bandwidths
- ✓ Up to 1GSa/s maximum sample rate
- ✓ 32 Mpts of waveform memory
- ✓ Compact and portable size — 117.00 mm x 180.00 mm x 41.00 mm (with rubber bumpers)
- ✓ Advanced triggering, including edge, pulse width, and TV
- ✓ Compatibility with Hi-Speed USB 2.0, USBTMC 488.2 standards
- ✓ Four math functions, including FFTs standard
- ✓ DUAL-PLAY — standalone and modular capability
- ✓ Compatibility with wide range of application development environments



Figure 1 The U2701A and U2702A USB modular oscilloscopes

Highest performance, lowest cost for today and tomorrow

Agilent's U2701A and U2702A USB modular oscilloscopes combine a set of essential features that are ideal for analyzing designs in an affordable way. The U2701A and U2702A come in two bandwidths: 100 MHz and 200 MHz respectively. These devices are uniquely designed to accommodate your needs for flexibility with the dual-play function. Dual-play functionality allows you to use the oscilloscope as a standalone or to scale up the test system in a cardcage with additional scopes or with Agilent's other USB modular product offerings, thus providing a complete solution for system development.

The U2701A and U2702A give you the debugging power you need. Each modular oscilloscope comes standard with features such as advanced triggering, automatic measurements, math functions including FFTs, and much more.

The user-friendly Agilent Modular Instrument Measurement Manager software bundled with the U2701A and U2702A offers a simple interface for quick setup, configuration, and measurement control.

Why Do You Need Deep Memory and a High Sampling Rate?

To see more time

When you are able to store more samples that you have obtained in the memory, you can view the signal at a longer time. This will be the best way to understand the use of deep memory.

A longer capture time gives you a better visibility into cause-effect relationships in your designs, which significantly simplify your root-cause debugging. It also allows you to capture start-up events in a single acquisition.

The need to stitch together multiple acquisitions or set precise triggering conditions are no longer necessary. You can spend less time finding events, and more time analyzing them.

To see even more details

The relationship between memory depth and acquisition rate is not as obvious. All scopes have a “banner” maximum sample rate specification, but many can only sustain these rates at a few time base settings.

Higher sampling rate

By offering sampling rate more than twice the acquired signal bandwidth, aliasing can be prevented. With more sampling data captured, higher accuracy of your test and analysis results can be achieved.

Ease of Use

The U2701A and U2702A USB modular oscilloscopes are equipped with Hi-Speed USB 2.0 interface for easy setup and plug-and-play. Hence, this ease-of-use makes the oscilloscopes ideal for the education, design validation, and manufacturing environment.



Figure 2 The dual-play capability allows U2701A and U2702A USB modular oscilloscopes to be used as standalone units or fitted into a cardcage.

Compatible with a Wide Range of Application Development Environments

The Agilent U2701A and U2702A USB modular oscilloscopes are compatible with a wide range of application development environments. This minimizes the time that R&D and manufacturing engineers need to use the devices in different software environments.

Listed below are the popular development environments and tools with which the USB modular oscilloscope is compatible:

- Agilent VEE and Agilent T&M Toolkit
- Microsoft® Visual Studio® .NET, C/C++ and Visual Basic® 6
- LabVIEW®
- Microsoft .NET Framework



Figure 3 The accessories offered for the U2701A and U2702A USB modular oscilloscopes.

Features you need

The U2701A and U2702A include the following standard features that you need to do your job done quickly and easily:

Hi-Speed USB Interface

The U2701A and U2702A connect to the computer through Hi-Speed USB 2.0 connectivity.

Autoscale

Autoscale lets you display any active signals, automatically setting the vertical, horizontal, and trigger controls for the best signal display within the shortest time.

Advanced triggering

Edge, pulse width, and TV are the triggering modes included to help you isolate the signals you want to see.

Large memory

With memory depth up to 32 Mpts, you can capture even more data. Larger memory allows you to capture data over a longer time frame.

Fast Fourier Transfer (FFT) and Waveform Math

The U2701A and U2702A offer analysis functions such as addition, subtraction, multiplication, division, and Fast Fourier Transform (FFT). FFT allows you to manipulate the waveform using five types of windows such as Hanning, Hamming, Blackman-Harris, Flattop, and rectangular.

High sampling rate

Sampling rate up to 500 MSa/s/ch enables more details of the signal to be seen and analyzed. When two channels are interleaved, the sampling rate can be up to 1 GSa/s. This fast-sampling capability allows you to perform intermittent detection easily.

Pulse triggering

Pulse triggering allows you to trigger on pulse events.

Portability

The U2701A and U2702A's compact size makes them portable and easy to be carried to your working field.

One-year warranty

Every U2701A and U2702A comes with one year warranty.



Figure 4 The U2701A and U2702A connect to the computer or laptop with a USB cable, enabling fast data transfer.

Product Characteristics and General Specifications

| | |
|-----------------------|---|
| Remote interface | Hi-Speed USB 2.0 USBTMC Class Device |
| Power consumption | +12 V DC, 2 A Installation Category III |
| Operating environment | Operating Temperature: 0 °C to 50 °C Storage Temperature: -20 °C to 70 °C Operating Humidity: 20 ~ 85% R.H. Non-condensing Storage Humidity: 5 ~ 90% R.H. Non-condensing Altitude: Up to 2,000 m (Operating and non-operating) Pollution Degree: 2 |
| Storage compliance | -20 °C to 70 °C |
| Safety compliance | Certified with: IEC 61010-1:2001/ EN61010-1:2001 (2nd Edition) Canada : CAN/CSA-C22.2 No. 61010-1-04 USA: ANSI/UL 61010-1:2004 |
| EMC compliance | IEC 61326-2002/ EN 61326:1997+A1:1998+A2:2001+A3:2003 Canada : ICES-001:2004 Australia/New Zealand: AS/NZS CISPR11:2004 |
| Shock and vibration | Tested to IEC/EN 60068-2 |
| IO connector | BNC connector |
| Dimension (W x D x H) | 117.00 mm x 180.00 mm x 41.00 mm (with rubber bumpers) 105.00 mm x 175.00 mm x 25.00 mm (without rubber bumpers) |
| Weight | 534 g (with rubber bumpers) 482 g (without rubber bumpers) |
| Warranty | One year |

System Requirements

| | |
|------------------|---|
| Processor | 1.6 GHz Pentium IV or higher |
| Operating system | One of the following Microsoft Windows® versions: Windows XP Professional or Home Edition (Service Pack 1 or later) Windows 2000 Professional (Service Pack 4 or later) |
| Browser | Microsoft Internet Explorer 5.01 or higher |
| Available RAM | 512 MB or higher recommended |
| Hard disk space | 1 GB |
| Prerequisites | Agilent IO Libraries Suite 14.2 ^[1] or higher Agilent T&M Toolkit 2.1 Runtime version ^[2] Microsoft .NET Framework version 1.1 and 2.0 ^[2] |

[1] Available in Agilent Automation-Ready CD

[2] Bundled with Agilent Measurement Manager software application installer

Standard Shipped Items


- 12 V, 2 A AC/DC Power Adapter
- Power Cord
- USB Standard A to Mini-B Interface Cable
- 10:1 Passive Probe 150 MHz 1.2m, N2862A (only applicable for U2701A)
- 10:1 Passive Probe 300 MHz 1.2m, N2863A (only applicable for U2702A)
- L-Mount Kit (used with modular instrument chassis)
- Agilent Automation-Ready CD (contains the Agilent IO Libraries Suite)
- Agilent USB Modular Products Quick Start Guide
- Agilent USB Modular Products Reference CD-ROM
- Agilent USB Modular Products Quick Reference Card
- Certificate of Calibration

Optional Accessories


- BNC Cable, U2921A-100
- USB Secure Cable, U2921A-101
- 1:1 Passive Probe 20 MHz, 1.5 m, 10070C
- 10:1 Passive Probe 150 MHz 1.2 m, N2862A (only applicable for U2701A)
- 10:1 Passive Probe 300 MHz 1.2 m, N2863A (only applicable for U2702A)

Product Outlook and Dimensions


Front View

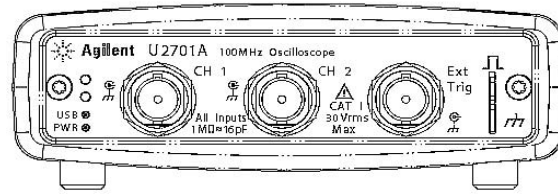

Rear View

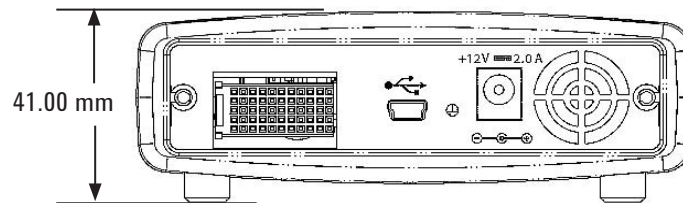

Top View

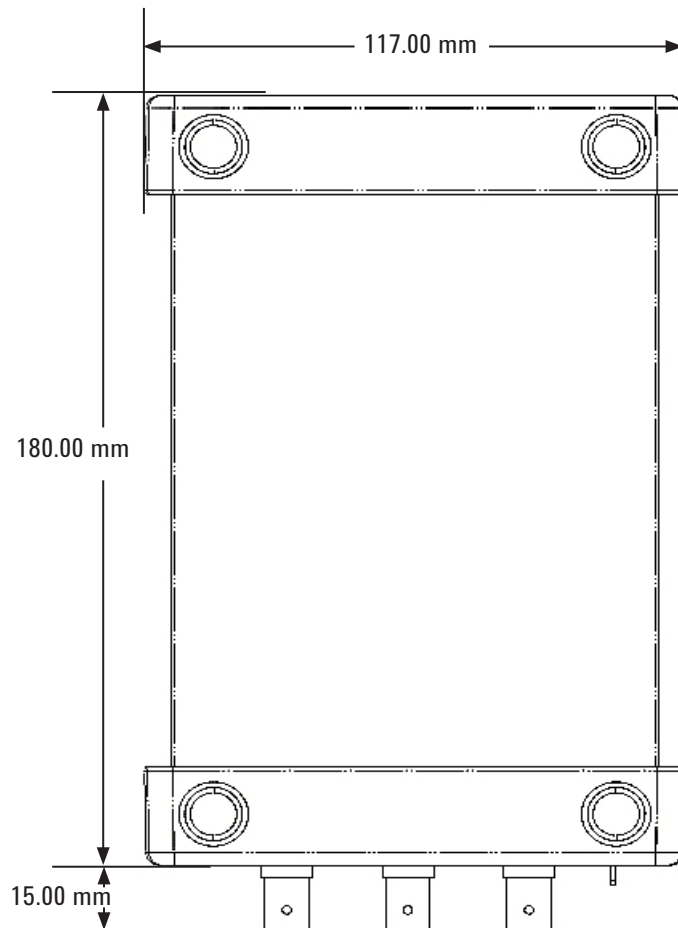

Performance Specifications^[1]

Vertical system: oscilloscope channels

| | |
|-------------------|--|
| Bandwidth (–3 dB) | U2701A: DC to 100 MHz U2702A: DC to 200 MHz |
|-------------------|--|

Scope channel triggering

| | |
|---------------------|--|
| Trigger sensitivity | <10 mV/div: greater of 1 div or 5mV; ≥10 mV/div: 0.6 div |
|---------------------|--|

1 All specifications are warranted. Specifications are valid after a 30-minute warm-up period and within ±10°C of last calibration temperature.

Performance Characteristics^[1]

Acquisition: oscilloscope channels

| | | |
|------------------------|---|-------------|
| Real time sample rate | | |
| 2 channels interleaved | 1 GSa/s | |
| Each channel | 500 MSa/s | |
| Standard memory depth | Normal | Single-shot |
| 2 channels interleaved | 32 Mpts | 64 Mpts |
| Each channel | 16 Mpts | 32 Mpts |
| Vertical resolution | 8 bits | |
| Peak detection | Yes | |
| Averaging | Any number from 1 to 999 | |
| Filter | Sin(x)/x interpolation for time base 1 ns to 100 ns | |
| Sweep modes | Auto, normal, single | |

Vertical system: oscilloscope channels

| | | |
|--|--|--|
| Scope channels | U2701A/U2702A: Ch 1 and 2 simultaneous acquisition | |
| AC coupled | U2701A: 3.5 Hz to 100 MHz U2702A: 3.5 Hz to 200 MHz | |
| Calculated rise time (= 0.35/bandwidth) | U2701A: 3.5 ns U2702A: 1.75 ns | |
| Single-shot bandwidth | U2701A: 100 MHz U2702A: 200 MHz | |
| Range | 2 mV/div to 5 V/div (1 M Ω) | |
| Maximum input ^[2] | CAT I 30 Vrms, 42 Vpk | |
| Offset range | ± 4 div Example: ± 8 mV on 2 mV/div; ± 20 V on 5 V/div | |
| Dynamic range | ± 4 div | |
| Input impedance | 1 M Ω : ≈ 16 pF | |
| Coupling | AC, DC, Ground | |
| BW limit | ≈ 25 MHz | |
| Standard probes | 10:1 Passive Probe 150 MHz 1.2 m 10:1 Passive Probe 300 MHz 1.2 m | |
| ESD tolerance | ± 2 kV | |
| Noise peak-to-peak | 3 mVpp | |
| DC vertical offset accuracy | ≤ 200 mV/div: ± 0.1 div ± 2.0 mV $\pm 0.5\%$ offset value; > 200 mV/div: ± 0.1 div ± 2.0 mV $\pm 1.5\%$ offset value | |
| DC vertical gain accuracy | $\pm 4.0\%$ of Full Scale | |

1 All characteristics are typical performance values and are not warranted. Characteristics are valid after a 30-minute warm-up period and within $\pm 10^\circ\text{C}$ of last calibration temperature.

2 Under standalone use, users are only allowed to measure up to CAT1 30 Vrms. For high-voltage measurement up to CAT1 300 Vrms, users must install the L-mount kit on the U2701A/U2702A before plugging into the instrument chassis. Ensure that the L-Mount kit installed on your modular oscilloscope is screwed to the instrument chassis to ensure chassis grounding. It is required to use the provided 10:1 probes (N2862A/N2863A) for high-voltage measurements

Performance Characteristics (continued)

Vertical system: oscilloscope channels (continued)

| | |
|------------------------|--|
| Single-cursor accuracy | $\pm\{\text{DC vertical gain accuracy} + \text{DC vertical offset accuracy} + 0.2\% \text{ full scale } (\sim 1/2 \text{ LSB})\}$ Example: for 50 mV signal, scope set to 10 mV/div (80 mV full scale), 5 mV offset, accuracy = $\pm\{4.0\% (80 \text{ mV}) + 0.1(10 \text{ mV}) + 2.0 \text{ mV} + 0.5\% (5 \text{ mV}) + 0.2\% (80 \text{ mV})\}$ = $\pm 6.385 \text{ mV}$ |
| Dual-cursor accuracy | $\pm\{\text{DC vertical gain accuracy} + 0.4\% \text{ full scale } (\sim 1 \text{ LSB})\}$ Example: for 50 mV signal, scope set to 10 mV/div (80 mV full scale), 5 mV offset, accuracy = $\pm\{4.0\% (80 \text{ mV}) + 0.4\% (80 \text{ mV})\}$ = $\pm 3.52 \text{ mV}$ |

Horizontal

| | |
|--------------------|---|
| Range | 1 ns/div to 50 s/div |
| Time base accuracy | 20 ppm |
| Delay range | Pre-trigger: -100% Post-trigger: $+100\%$ |
| Modes | Main, roll, XY |
| XY | Yes |
| Reference position | Center |

Trigger system

| | |
|--------------|---|
| Sources | Ch 1, Ch 2, Ext (not applicable for TV trigger) |
| Modes | Normal, single, auto trigger |
| Holdoff time | 60 ns |
| Selections | Edge, pulse width, TV |
| Edge | Triggers on a rising or falling edge, alternating, or either edge of any source |
| Pulse width | Triggers on a pulse width greater than, equal to, or less than a specified time limit, with time limits ranging from 16 ns to 10 s. Minimum lower limit: 8 ns Minimum upper limit: 16 ns Maximum pulse width setting: 10 s |
| TV | Triggers on one of three standard television waveforms: NTSC, PAL, SECAM TV trigger sensitivity: 0.6 division of sync signal. Modes supported include Field 1, Field 2, all fields, or any line within a field. |
| AutoScale | Single-button automatic setup of all channels |

Oscilloscope channel triggering

| | |
|------------------|--|
| Range (internal) | ± 4 div from center screen |
| Coupling | AC ($< 15 \text{ Hz}$) LF reject ($\sim 35 \text{ kHz}$) HF reject ($\sim 35 \text{ kHz}$) |

External (EXT) triggering

| | |
|-------------------------|---|
| Input impedance | 1 M Ω : $\approx 16 \text{ pF}$ |
| Maximum input | CAT I 30 Vrms, 42 Vpk |
| Range | DC coupling: trigger level $\pm 1.25 \text{ V}$ and $\pm 2.5 \text{ V}$ |
| EXT trigger pulse width | $> 2.5 \text{ ns}$ |

Performance Characteristics (continued)

External (EXT) triggering (continued)

| | |
|---------------------------|---|
| Trigger level sensitivity | For ± 1.25 V range setting: DC to 100 MHz: 100 μ V > 100 MHz: 200 μ V For ± 2.5 V range setting: DC to 100 MHz: 250 μ V > 100 MHz: 500 μ V |
|---------------------------|---|

Display

| | |
|---------------|------------------|
| Interpolation | Sin(x)/x |
| Display types | Dots and vectors |
| Persistence | Off, infinite |
| Format | XY, roll |

Measurement features

| | |
|------------------------|---|
| Automatic measurements | Measurements are continuously updated. Cursors track last selected measurement. |
| Voltage | Peak-to-peak, maximum, minimum, average, amplitude, top, base, Vrms, overshoot, preshoot, crest, standard deviation, cycle RMS, RMS AC |
| Time | Frequency, period, +width, -width, +duty cycle, -duty cycle, rise time, fall time, delay, phase |
| Frequency | Maximum peak |
| Cursors | Modes: Manual Type: Time, voltage and frequency (FFT) Measurements: ΔT , ΔV , frequency, Peak Scan (FFT), Δ Peak |
| Math functions | Add, subtract, multiply, FFT, divide |

FFT

| | |
|-------------------|---|
| Points | 1250 points (for 500 ns and above) |
| Source of FFT | Source channels 1 or 2 |
| Window | Hanning, Hamming, Blackman-Harris, rectangular, Flattop |
| Noise floor | -50 to -90 dB depending on averaging |
| Amplitude | Display in dBV |
| Maximum frequency | 250 MHz |



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open
Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

Microsoft is a U.S. registered trademark of Microsoft Corporation.

Visual Studio and Visual Basic are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

| | |
|---------------|----------------|
| Canada | (877) 894-4414 |
| Latin America | 305 269 7500 |
| United States | (800) 829-4444 |

Asia Pacific

| | |
|-----------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Thailand | 1 800 226 008 |

Europe & Middle East

| | |
|----------------|---------------------|
| Austria | 0820 87 44 11 |
| Belgium | 32 (0) 2 404 93 40 |
| Denmark | 45 70 13 15 15 |
| Finland | 358 (0) 10 855 2100 |
| France | 0825 010 700* |
| | *0.125 €/minute |
| Germany | 01805 24 6333** |
| | **0.14 €/minute |
| Ireland | 1890 924 204 |
| Israel | 972-3-9288-504/544 |
| Italy | 39 02 92 60 8484 |
| Netherlands | 31 (0) 20 547 2111 |
| Spain | 34 (91) 631 3300 |
| Sweden | 0200-88 22 55 |
| Switzerland | 0800 80 53 53 |
| United Kingdom | 44 (0) 118 9276201 |

Other European Countries:

www.agilent.com/find/contactus

Revised: March 27, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2008
Printed in USA, September 1, 2008
5989-7299EN



Agilent Technologies