

т	۵	п п	m	0



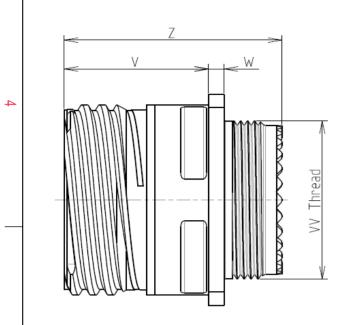

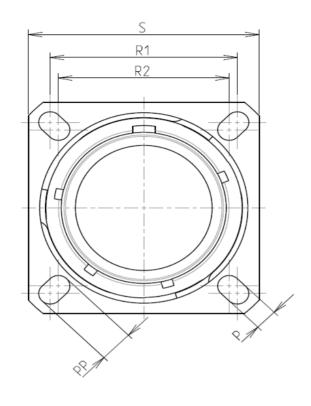

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 25

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours

8D 0

G

25

F

41

В

F

А

Dim	Nominal
Р	3.91±0.2
PP	6.15±0.2
R1	38.1
R2	34.93
S	46±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M37x1-6g

**ORIENTATION : A** 

CONTACT LAYOUT : 25-41

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend



	σ		А			
					4	
S EXA	MPLE				3	
whic of the	non-conformit h does not co he Parties or t n, technical n	mply with by a third part	ty			
intry R	Jurisdiction & Control List Not Listed				2	
5F4	41BA					
		CUSTOME	R DRAWING	MOD N°	<u> </u>	
um l	um Receptacle 8D series					
ar		NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1	
	DRG N° 1BA-C			SHEET		
·F4.	BA-C		A	-, -	J	

	<b>工</b>	G	нт —	m		0	
		Contact Layout 41				Pan SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	el Cutou
4	Ctc X A 0 B 7.09	22#22D, 3#20 11#16, 2#12 3#8 Triax 25-41 Y Ctc X Y 10.79 Y -5.37 7.92 11.34 Z 3.32 5.72			۲ ۲		ž
	C 10.77   D 12.94   E 13.27   F 8.17   G 4.67   H 0   J -4.67   K -8.17   L -13.27   M -12.94   N -10.77	7.92 a 7.96 -0.42   3.39 b 0 -6.6   -1.62 c -7.96 -0.42   -6.44 d -3.32 5.72   -12.53 e 0 4.48   -13.37 f 3.02 3.07   -12.53 g 5.32 0.005   -6.44 h 3.7 -2.43   -1.62 i 2.38 -4.74   3.39 j -2.38 -4.74   7.92 k -3.7 -2.43			<u>¥</u>	Dim ØA	_
ω	P -7.09   R 5.37   S 7.32   T 10.39   U 1.77   V -1.77   W -10.39   X -7.32	11.34 m -5.32 0.005   7.92 n -3.02 3.07   3.91 p 0 1.81   0.67 q 2.59 -0.01   -9.66 r 0 -3.53   -9.66 s -2.59 -0.01   0.67 t 0 -3.53   3.91 v -0.66 s -2.59				ØAA R1 ØT	
						SOURIAU shall not be liabl due to a use of the Proc the Specifications issued by (professional recom	ducts whi either of nmendati
N						PN: 8D	Country FR 025F
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					SCALE NA	Alum General Tolera ±-	inces:
					FORMAT	J WWW.SOURI	
		<u> </u>	F	r r	A3	8D0	)25F4
	Н	G	F	E	D	С	

