


A200

Originally a Westinghouse Product



A200 Size 1 Starter

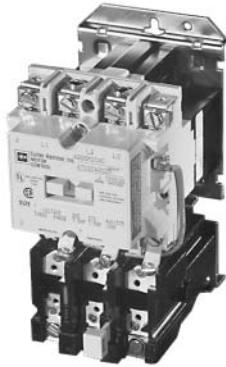

Contact Kit for A200 Model J, Size 2-, 3-Pole

13



A200 ac Coil, 120/110 V 60/50 Hz,
2-, 3-, 4-Pole, Sizes 00, 0 and 1

Product History Time Line

| Size | Model | 1960 | 1965 | 1970 | 1975 | 1980 | 1985 | 1990 | 1995 | 2000 | Present |
|------|-------------------|------|------|------|------|------|------|------|------|------|---------|
| 00-3 | J | | | | | | | | | | |
| 4 | J | | | | | | | | | | |
| 4 | K | | | | | | | | | | |
| 5-6 | Electrically Held | | | | | | | | | | |
| 5-6 | Mechanically Held | | | | | | | | | | |
| 7-8 | | | | | | | | | | | |
| 9 | | | | | | | | | | | |

Figure 13-5. Product History Time Line for A200, A201, A203, A204, A206, A210, A211, A213, A214, A216, A220, A223, A224, A226, A250, A251, A600, A603, A604, A606, A700, A703, A704, A706, A800, A804 and A806

Replacement Capabilities

Table 13-10. Kits for Model J, Sizes 00, 0, 1 and 2 ①

| Description | Poles | Size 00 | Size 0 | Size 1 | Size 2 |
|--|-------|------------|------------|------------|-------------------------|
| Contact Kit | 2 | 373B331G17 | 373B331G02 | 373B331G07 | 373B331G11 |
| | 3 | 373B331G18 | 373B331G04 | 373B331G09 | 373B331G12 |
| | 4 | 373B331G18 | 373B331G04 | 373B331G09 | 373B331G13 ② |
| | 5 | 373B331G19 | 373B331G05 | 373B331G10 | 373B331G14 ③ |
| Arc Box ④ | 2-4 | 6714C74G01 | 6714C74G02 | 6714C74G03 | 6714C74G07 (2-, 3-pole) |
| | 5 | 6714C74G04 | 6714C74G05 | 6714C74G06 | 6714C74G08 (4-, 5-pole) |
| Cross Bar | 2-3 | N/A | N/A | N/A | 672B788G32 |
| | 4-5 | N/A | N/A | N/A | 672B788G34 |
| Upper Base (for single rated coils only) | 2-3 | N/A | N/A | N/A | 672B788G33 |
| | 4-5 | N/A | N/A | N/A | 672B788G35 |
| Lower Base | 2-3 | N/A | N/A | N/A | 1250C33G09 |
| | 4-5 | N/A | N/A | N/A | 1250C33G05 |
| KO Spring (Pk. of 10) | All | N/A | N/A | N/A | 503C796G01 |
| Terminal Line/Load (Pk. of 3) | All | N/A | N/A | N/A | 371B870G03 |

① Model C contact kits and coils 00-4, 2-, 3-, 4- and 5-pole contactors are same as Model J. All other parts are unavailable.

② Use Quantity 2 — 373B331G11 (2-pole kit).

③ Use one each of 373B331G11 (2-pole kit) and 373B331G12 (3-pole kit).

④ Mounting hardware included.

Table 13-11. ac Coils

| Voltage | Hz | Sizes 00, 0 and 1 | | Size 2 | |
|-----------|-------|-------------------|------------|------------|------------|
| | | 2-, 3-, 4-Pole | 5-Pole | 2-, 3-Pole | 4-, 5-Pole |
| 120/110 | 60/50 | 505C806G01 | 505C808G01 | 505C806G01 | 505C818G01 |
| 208 | 60 | 505C806G02 | 505C808G02 | 505C806G02 | 505C818G02 |
| 600/550 | 60/50 | 505C806G05 | 505C808G05 | 505C806G05 | 505C818G05 |
| 380 | 50 | 505C806G07 | 505C808G07 | 505C806G07 | 505C818G07 |
| 240/220 | 60/50 | 505C806G12 | 505C808G12 | 505C806G12 | 505C818G12 |
| 480/440 | 60/50 | 505C806G13 | 505C808G13 | 505C806G13 | 505C818G13 |
| 24 | 60 | 505C806G16 | N/A | 505C806G16 | 505C818G15 |
| 277 | 60 | 505C806G18 | 505C808G16 | 505C806G18 | 505C818G16 |
| 240/480 ⑤ | 60/60 | 505C806G03 | 505C808G03 | 505C806G03 | 505C818G03 |
| 120/240 ⑤ | 60/60 | 505C806G10 | 505C808G10 | 505C806G10 | 505C818G10 |

⑤ Dual voltage coils. Use only on contactors or starters originally supplied with a dual voltage coil.