

т	Q	н <b>т</b>	m	0



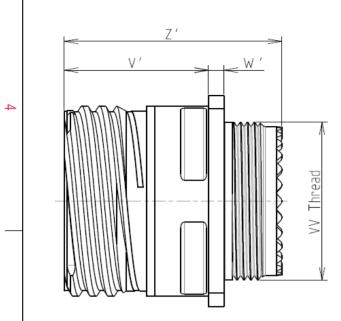

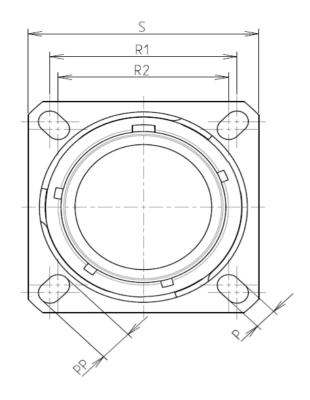

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 25

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material		: Composite		
	-Shell Plating	: Olive drab Cadmium		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	: -65°C to +175°C		
	-Salt Spray	: 2000 hours		

: 44.4 g ± 10%

8D 0

G

25

J

29

Ρ

F

В

Connector dimension				
Dim	Nominal			
Р	3.91±0.2			
PP	6.15±0.2			
R1	38.1			
R2	34.93			
S	46±0.3			
V'	18.7+1.4/-0			
W'	2.1/4.35			
Ζ'	32 Max			
VV THREAD	M37x1-6g			


**ORIENTATION : B** 

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 25-29

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

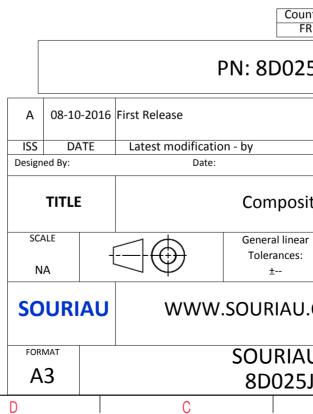

	Ξ		A					
S EXA	AMPLE				3			
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)								
untry FR	/ Jurisdiction & Control List Not Listed							
25J29PB								
		CUSTOMF		MOD N°				
site	ite Receptacle 8D series							
ar			PROJECT					
859   This document is the property of SOURIAU   it must not be reproduced or								
		communi	cated without pe	rmission SHEET				
U DRG N° 5J29PB-C				1/2				
	В		А		J			

