

т	۵	н п	m	0



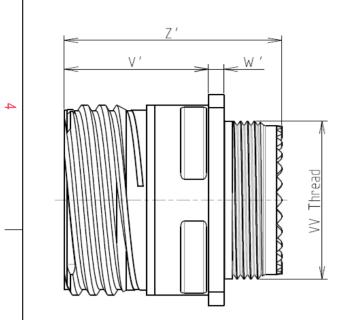



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 25

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	-65°C to +175°C		
-Salt Spray	: 2000 hours		
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souriau -Temperature Range		

: 73.4 g ± 10%

8D 0

G

25

J

29

S

F

Ν

Connector dimension				
Dim	Nominal			
Р	3.91±0.2			
PP	6.15±0.2			
R1	38.1			
R2	34.93			
S	46±0.3			
V'	18.7+1.4/-0			
W'	2.1/4.35			
Ζ'	32 Max			
VV THREAD	M37x1-6g			


ORIENTATION : N

CONTACT LAYOUT : 25-29

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

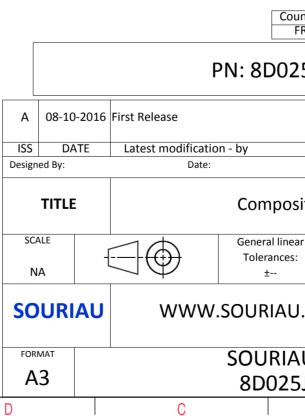

	σ		А			
					4	
SS EXA	AMPLE				3	
whice er of t idatio	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part			2	
		CUSTOME	R DRAWING	MOD N°		
ite	e Receptacle 8D series					
ar			PROJECT 59		1	
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	UDRG N° SHEET					
275	9SN-C B		A	1/2	J	

