
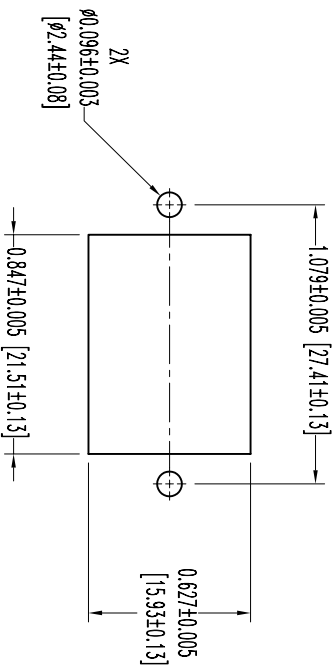
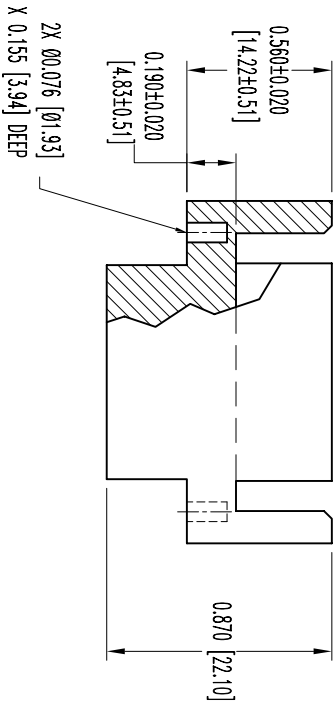



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND ASSUMES ALL RESPONSIBILITIES AND ASSUMES RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

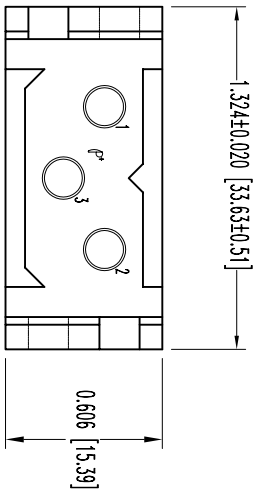

PANEL CUTOUT

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.

2. ELECTRICAL CHARACTERISTICS:

INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3d, METHOD A.

WORKING VOLTAGE: 1,250 V r.m.s.

3. WORKING TEMPERATURE: -55°C TO +125°C.

4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

			
POSITRONIC INDUSTRIES INC.			
www.connectpositronic.com			
DECIMAL TOL.		SCALE	
± 0.015 [0.38]		N.T.S.	
ANGULAR TOL.		DRAWN BY	
± 5°		YK	
DATE		DRAWING NUMBER	
5-8-06		SK7345	
TITLE		REV.	
PCS SERIES		NC	
PLB3W3M1000/AA			

DATE	REV	REVISION RECORD	APP	DR	CK
5-8-06	NC	ECO 25932		YK	

SK7345