



Technical Data

Double 13 Amp Socket Outlet with USB Charger

Brief product description:

Free up your sockets using the Nexus White Moulded Socket with USB charger capability ideal for charging iPad, iPhone, tables, mobiles, cameras and more.

Features:

- White moulded round edge, sleek and slim with softly rounded edges
- Smart USB - Standby mode when device is fully charged; AutoDetect's the USB device and adjusts charging pattern to suite; protective overload function
- USB charger standby mode when not in use
- Angled colour coded terminals with captive screws

Product Images



822U



822U3



822U33




824U44

Technical Specifications

Standard(s)	BS 5733 & BS EN 60950		 
ASTA Approval	Licence Number 1182		
Rating	13 Amp 240V~		
Contact Gap	3.0mm minimum		
Switch Type	Single Pole (824U44 Unswitched)		
Terminal Capacity - L & N	3 x 2.5mm ² , 3 x 4.0mm ² & 2 x 6.0mm ²		
RoHS Directive	Yes, conforms		
WEEE Directive	Yes		
Mounting Box Depth (Min)	25mm		
Fixing Centres	120.6mm		
USB Output	822U	5V, 2.1A, shared across two USB ports	
	822U3	5V, 3.1A, shared across two USB ports	
	822U33	5V, 3.1A, shared across three USB ports	
	824U44	5V, 4.2A, shared across four USB ports	
Output Tolerance	<5%		
Stand-by Power	<75mW		
USB Overcurrent Protection	822U	≤2.43A	
	822U3	≤3.60A	
	822U33	≤3.60A	
	824U44	≤4.85A	

Double 13 Amp Socket Outlet with USB Charger

Line Diagrams

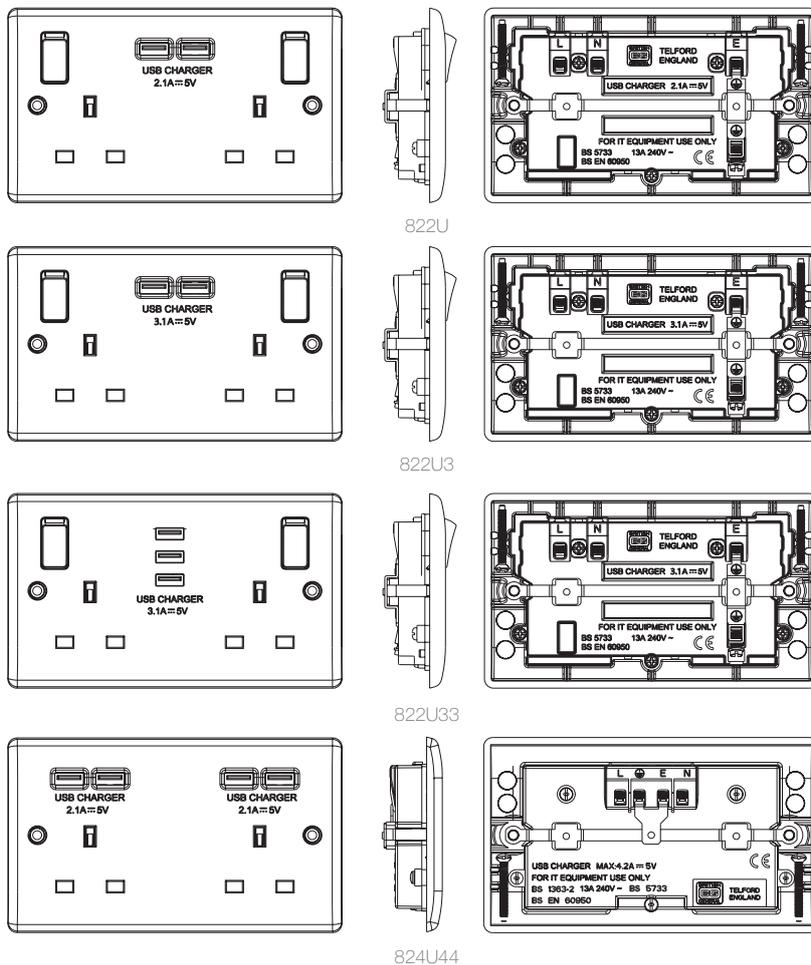

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
822U-01	2g, 2xUSB (2.1A)	Eco Blister	Box	Carton	1	5	50	5050765107105	5050765106887	5050765106993
822U3-01	2g, 2xUSB (3.1A)	Eco Blister	Box	Carton	1	5	50	5050765136945	5050765142571	5050765142762
822U33-01	2g, 3xUSB (3.1A)	Eco Blister	Box	Carton	1	5	50	5050765137157	5050765142953	5050765142977
824U44-01	2g, 4xUSB (4.2A)	Eco Blister	Box	Carton	1	5	50	5050765137171	5050765142991	5050765143172

Weights & Dimensions

Cat No.	Description	Dimensions (L x W x D) cm				Weight (kg)				CBM (m ³)
		Unpacked Product	Packed Product	Inner Box	Outer Box	Each	Packed Product	Inner Box	Outer Box	Outer Box
822U-01	2g, 2xUSB (2.1A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02
822U3-01	2g, 2xUSB (3.1A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02
822U33-01	2g, 3xUSB (3.1A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02
824U44-01	2g, 4xUSB (4.2A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02

Double 13 Amp Socket Outlet with USB Charger

Installation Information

Safety Warning

For your safety, this product must be installed in accordance with local building regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or from your Local Authority.

Please read carefully and use in accordance with these safety wiring instructions.

Before commencing any electrical work ensure the supply is switched off at the mains either by switching off the consumer unit or by removing the appropriate fuse.

Wiring should be in accordance with the latest edition of the IET regulations (BS 7671). To prevent fire hazard always use cable of the correct rating, size and type for the application.

Any bare earth wires must be covered with appropriate green/yellow sleeving.

Warning do not exceed the load rating of this device as stated on the rear of the product.

If in doubt consult a competent electrician.

Wire Identification – Twin & Earth Cable

EARTH = Green/Yellow Sleeving

NEUTRAL = Black (pre Apr 04) / Blue (after Apr 04)

LIVE = Red (pre Apr 04) / Brown (after Apr 04)



Technical Helpline: 03300 249 279

If in doubt consult a competent electrician.

The ends of the individual conductors should have the insulation removed by approx. 12mm. Any bare earth conductors should be sleeved to within 12mm of the ends. (These details are for general information only and conductor lengths may need to be trimmed in certain installations).

General Installation Instructions

- 1) If using the new product to replace an old one, note the cable connections and wire up new product in the same way as the old one, with Earthing as stated in these instructions.
- 2) Ensure the mounting box (metal or plastic) for either flush or surface mounting is the appropriate size for the product.
- 3) Route the cable through the most suitable entry point of the mounting box. If a metal box is used, a protective cable grommet should be used.
- 4) Cables should be prepared so a sufficient conductor length reaches the terminals. Strip the ends of the individual conductors so that an adequate length enters the terminals.
- 5) Carefully arrange the wiring to lie along the edges of the product or box, keeping the central area clear.
- 6) To assist with the correct installation please consult the appropriate wiring diagram on this leaflet.
- 7) When connecting the new accessory ensure that only the bare end of the wire enters the terminal, and no bare wires are visible.

Always tighten the terminal screws securely, but do not overtighten.

An earth connection should always be made between the mounting box earth terminal, and the accessory earth terminal, where fitted. If this earth wire is bare, it is essential that it is sheathed with a length of green/yellow sleeving.

8) Carefully position the accessory into the wall box, ensuring that no wires are trapped between the plate and the wall. Do not overtighten the screws. (Fit screw covers + clip-on)

9) Once work has been completed correctly, replace the fuse for the circuit, switch the power back on, and test.

The product is now ready for use.


* Note - If your installation uses a four lug metal mounting box, remove the top and bottom lugs or bend fully back.

Twin Earth Fitted

This socket is fitted with two linked terminals to provide a dual earth facility. This is for use in "clean earth" installations where additional earth capacity is required to comply with Regulation 607 of BS7671 IEE Wiring Regulations. Connect the cables as shown in the diagram.

2 gang Switched Socket Line Drawing

Connect the cables as shown in the diagram.

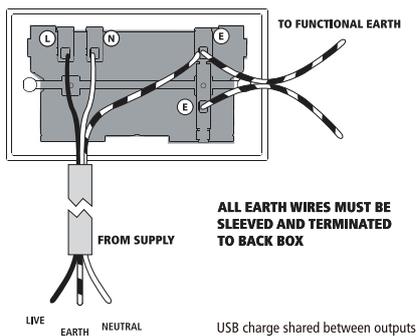


USB Charger Information

- 13A Sockets with USB charging ports for charging mobile devices such as mobile phones, MP3 players and tablets.
- Total charger current can be delivered from one USB socket or divided between outputs as required
- For 3.1A output chargers, if a device was charging using 1.5A then it would leave the other port with 1.6A. This means that devices may charge more slowly than with a normal single plug charger
- The speed of charging will depend on the battery capacity of the device and not charge output of the socket. A device with a battery capacity of 1500mAh will not charge any faster with a 3.1A charger compared to a 2.1A charger.
- The total output current achieved is dictated by the specific device being charged and other external factors, such as the quality of the charging cable being used
- When not in use, the USB sockets are in a low energy standby mode.
- The USB circuits on this socket are designed to withstand insulation resistance tests at 500V

Note - The front surface of this product may become warm in use. This is normal and not cause for concern.

2 gang Unswitched Socket Line Drawing

Connect the cables as shown in the diagram.

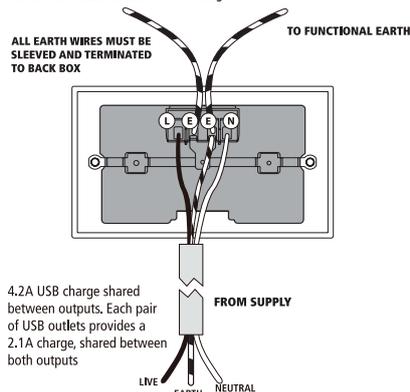



Technical Data

Double 13 Amp Socket Outlet with USB Charger

Brief product description:

Free up your sockets using the Nexus White Moulded Socket with USB charger capability ideal for charging iPad, iPhone, tables, mobiles, cameras and more.

Features:

- White moulded square edge profile offering exceptional value
- Smart USB - Standby mode when device is fully charged; AutoDetect's the USB device and adjusts charging pattern to suite; protective overload function
- USB charger standby mode when not in use
- Angled colour coded terminals with captive screws


Product Images



922U



922U3

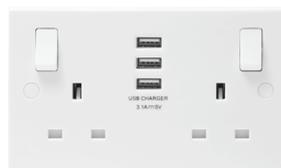

922U33




924U44

Technical Specifications

Standard(s)	BS 5733 & BS EN 60950		 
ASTA Approval	Licence Number 1182		
Rating	13 Amp 240V~		
Contact Gap	3.0mm minimum		
Switch Type	Single Pole (924U44 Unswitched)		
Terminal Capacity - L & N	3 x 2.5mm ² , 3 x 4.0mm ² & 2 x 6.0mm ²		
RoHS Directive	Yes, conforms		
WEEE Directive	Yes		
Mounting Box Depth (Min)	25mm		
Fixing Centres	120.6mm		
USB Output	922U	5V, 2.1A, shared across two USB ports	
	922U3	5V, 3.1A, shared across two USB ports	
	922U33	5V, 3.1A, shared across three USB ports	
	924U44	5V, 4.2A, shared across four USB ports	
Output Tolerance	<5%		
Stand-by Power	<75mW		
USB Overcurrent Protection	922U	≤2.43A	
	922U3	≤3.60A	
	922U33	≤3.60A	
	924U44	≤4.85A	

Double 13 Amp Socket Outlet with USB Charger

Line Diagrams

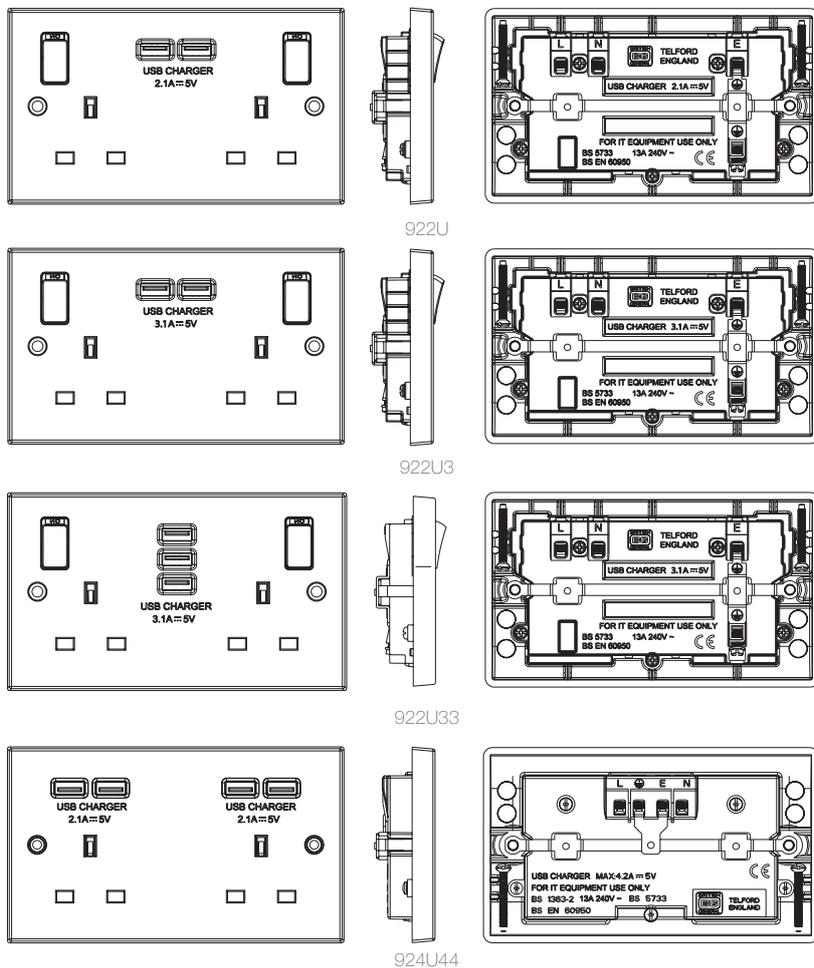

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
922U-01	2g, 2xUSB (2.1A)	Eco Blister	Box	Carton	1	5	50	5050765113908	5050765116824	5050765116831
922U3-01	2g, 2xUSB (3.1A)	Eco Blister	Box	Carton	1	5	50	5050765136846	5050765142588	5050765142779
922U33-01	2g, 3xUSB (3.1A)	Eco Blister	Box	Carton	1	5	50	5050765137164	5050765142960	5050765142984
924U44-01	2g, 4xUSB (4.2A)	Eco Blister	Box	Carton	1	5	50	5050765136853	5050765143004	5050765143189

Weights & Dimensions

Cat No.	Description	Dimensions (L x W x D) cm				Weight (kg)				CBM (m ³)
		Unpacked Product	Packed Product	Inner Box	Outer Box	Each	Packed Product	Inner Box	Outer Box	Outer Box
922U-01	2g, 2xUSB (2.1A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02
922U3-01	2g, 2xUSB (3.1A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02
922U33-01	2g, 3xUSB (3.1A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02
924U44-01	2g, 4xUSB (4.2A)	8.6 x 14.6 x 3.3	11.0 x 23.0 x 3.6	16.7 x 14.2 x 9.3	48.5 x 30.0 x 19.0	0.186	0.198	1.02	10.62	0.02

Double 13 Amp Socket Outlet with USB Charger

Installation Information

Safety Warning

For your safety, this product must be installed in accordance with local building regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or from your Local Authority.

Please read carefully and use in accordance with these safety wiring instructions.

Before commencing any electrical work ensure the supply is switched off at the mains either by switching off the consumer unit or by removing the appropriate fuse.

Wiring should be in accordance with the latest edition of the IET regulations (BS 7671). To prevent fire hazard always use cable of the correct rating, size and type for the application.

Any bare earth wires must be covered with appropriate green/yellow sleeving.

Warning do not exceed the load rating of this device as stated on the rear of the product.

If in doubt consult a competent electrician.

Wire Identification – Twin & Earth Cable

EARTH = Green/Yellow Sleeving

NEUTRAL = Black (pre Apr 04) / Blue (after Apr 04)

LIVE = Red (pre Apr 04) / Brown (after Apr 04)



Technical Helpline: 03300 249 279
If in doubt consult a competent electrician.

The ends of the individual conductors should have the insulation removed by approx. 12mm. Any bare earth conductors should be sleeved to within 12mm of the ends. (These details are for general information only and conductor lengths may need to be trimmed in certain installations).

General Installation Instructions

- 1) If using the new product to replace an old one, note the cable connections and wire up new product in the same way as the old one, with Earthing as stated in these instructions.
- 2) Ensure the mounting box (metal or plastic) for either flush or surface mounting is the appropriate size for the product.
- 3) Route the cable through the most suitable entry point of the mounting box. If a metal box is used, a protective cable grommet should be used.
- 4) Cables should be prepared so a sufficient conductor length reaches the terminals. Strip the ends of the individual conductors so that an adequate length enters the terminals.
- 5) Carefully arrange the wiring to lie along the edges of the product or box, keeping the central area clear.
- 6) To assist with the correct installation please consult the appropriate wiring diagram on this leaflet.
- 7) When connecting the new accessory ensure that only the bare end of the wire enters the terminal, and no bare wires are visible.

Always tighten the terminal screws securely, but do not overtighten.

An earth connection should always be made between the mounting box earth terminal, and the accessory earth terminal, where fitted. If this earth wire is bare, it is essential that it is sheathed with a length of green/yellow sleeving.

8) Carefully position the accessory into the wall box, ensuring that no wires are trapped between the plate and the wall. Do not overtighten the screws. (Fit screw covers + clip-on)

9) Once work has been completed correctly, replace the fuse for the circuit, switch the power back on, and test.

The product is now ready for use.


* Note - If your installation uses a four lug metal mounting box, remove the top and bottom lugs or bend fully back.

Twin Earth Fitted

This socket is fitted with with two linked terminals to provide a dual earth facility. This is for use in "clean earth" installations where additional earth capacity is required to comply with Regulation 607 of BS7671 IEE Wiring Regulations. Connect the cables as shown in the diagram.

2 gang Switched Socket Line Drawing

Connect the cables as shown in the diagram.

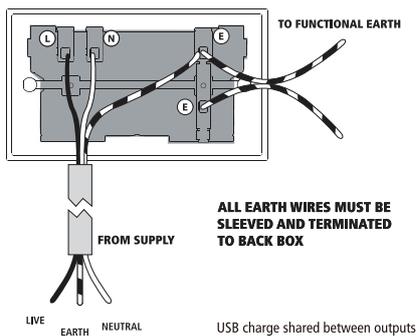

USB Charger Information

- 13A Sockets with USB charging ports for charging mobile devices such as mobile phones, MP3 players and tablets.
- Total charger current can be delivered from one USB socket or divided between outputs as required
- For 3.1A output chargers, if a device was charging using 1.5A then it would leave the other port with 1.6A. This means that devices may charge more slowly than with a normal single plug charger
- The speed of charging will depend on the battery capacity of the device and not charge output of the socket. A device with a battery capacity of 1500mAh will not charge any faster with a 3.1A charger compared to a 2.1A charger.
- The total output current achieved is dictated by the specific device being charged and other external factors, such as the quality of the charging cable being used
- When not in use, the USB sockets are in a low energy standby mode.
- The USB circuits on this socket are designed to withstand insulation resistance tests at 500V

Note - The front surface of this product may become warm in use. This is normal and not cause for concern.

2 gang Unswitched Socket Line Drawing

Connect the cables as shown in the diagram.

