




COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△				• •		△				• •
	△				• •		△				• •
	△				• •		△				• •

RECOMMENDED PC BOARD LAYOUT

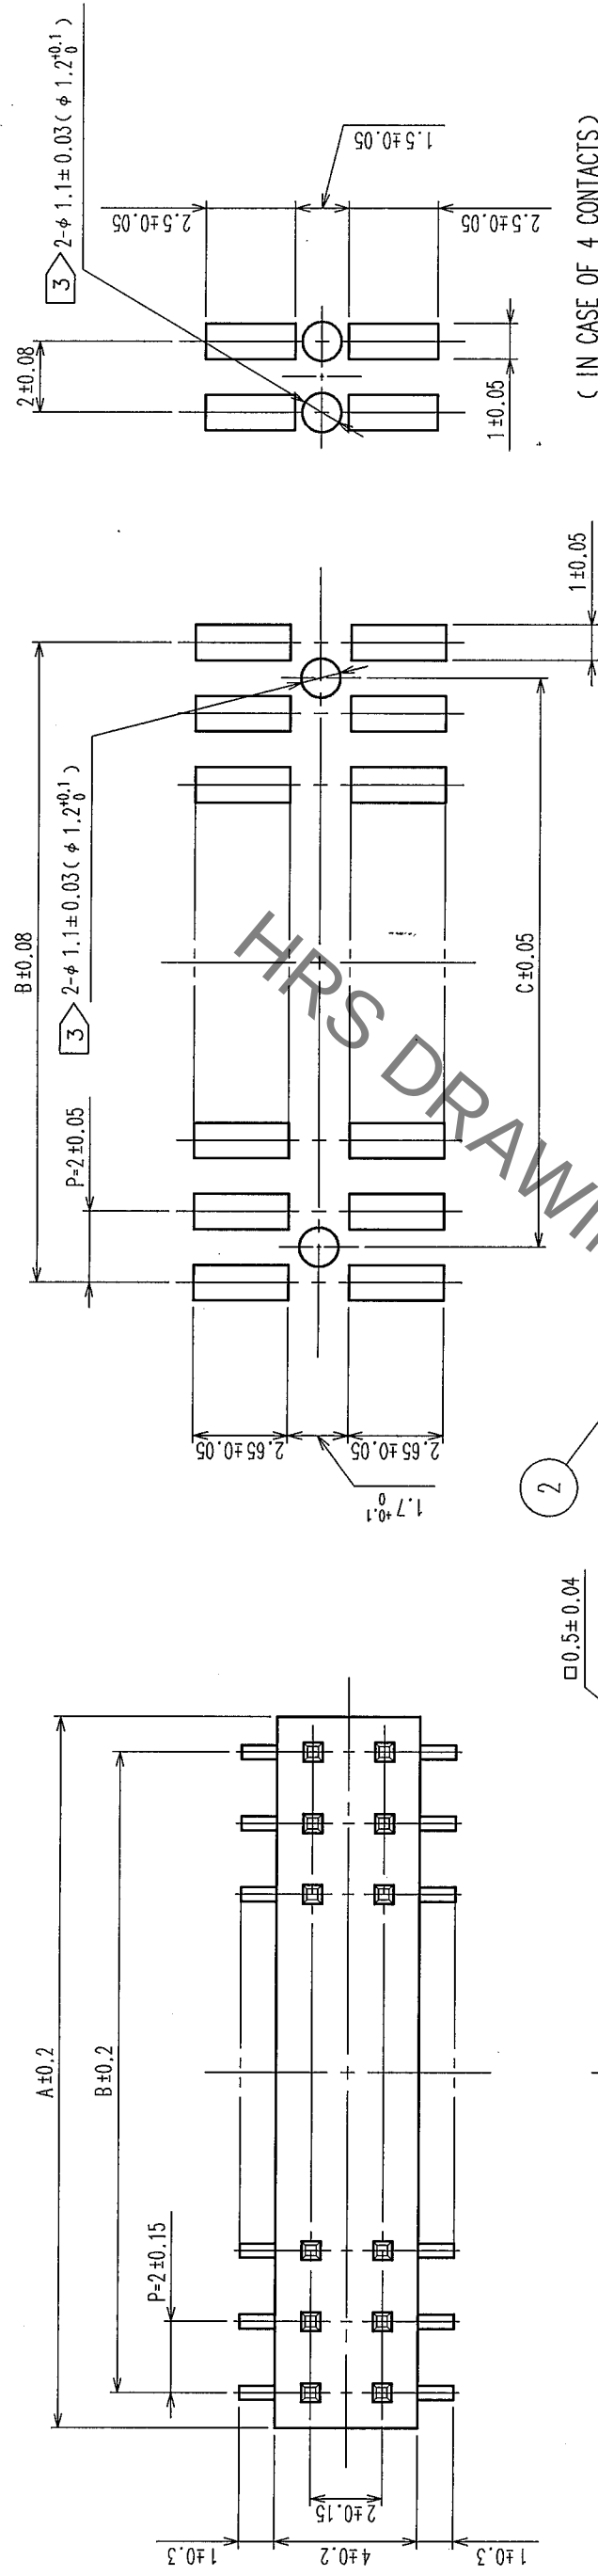

(C IN CASE OF 4 CONTACTS)

PART No.	CODE No.		A	B	C
A3A-4PA-2SV(71)	CL621-1040-0-71	4	4	2	2
A3A-6PA-2SV(71)	CL621-1041-3-71	6	6	4	2
A3A-8PA-2SV(71)	CL621-1042-6-71	8	8	6	4
A3A-10PA-2SV(71)	CL621-1043-9-71	10	10	8	6
A3A-12PA-2SV(71)	CL621-1044-1-71	12	12	10	8
A3A-14PA-2SV(71)	CL621-1045-4-71	14	14	12	10
A3A-16PA-2SV(71)	CL621-1046-7-71	16	16	14	12
A3A-20PA-2SV(71)	CL621-1048-2-71	20	20	18	16
A3A-24PA-2SV(71)	CL621-1050-4-71	24	24	22	20
A3A-28PA-2SV(71)	CL621-1052-0-71	28	28	26	24
A3A-32PA-2SV(71)	CL621-1054-5-71	32	32	30	28
A3A-44PA-2SV(71)	CL621-1055-8-71	44	44	42	40
A3A-50PA-2SV(71)	CL621-1056-0-71	50	50	48	46

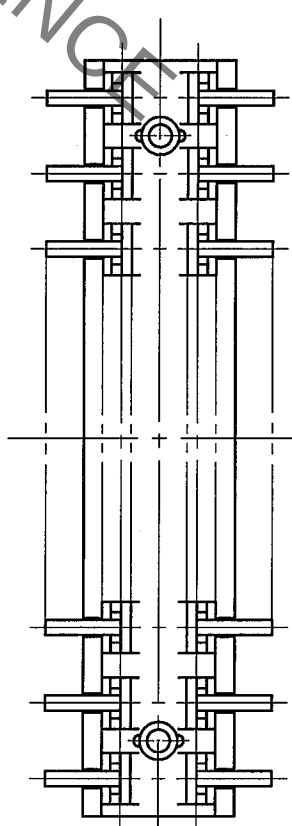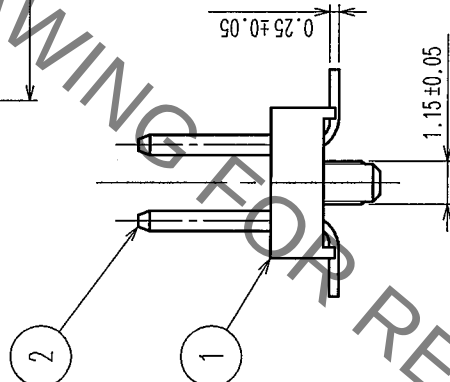

1	POLYPHENYLENE SULFIDE	LIGHT BROWN / UL94 V-0	2	BRASS	CONTACT AREA: GOLD 0.2 μ m min. MOUNTING AREA: GOLD FLASH UNDER PLATING: NICKEL 2 μ m min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)		DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED
		T. NODA		K. Doi	K. Ogawa	H. Kawa	
		'05.03.30		'05.03.30	'05.03.30	'05.03.30	
DRAWING NO.		PART NO.		A3A-*PA-2SV(71)			
SCALE		EDC3-082601-21					
UNITS		FREE		CL621			
		HIROSE ELECTRIC CO., LTD		1/1			

注 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS SHALL BE $1.2^{+0.1}_{-0}$.
4 NUMBER OF CONTACT.