


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

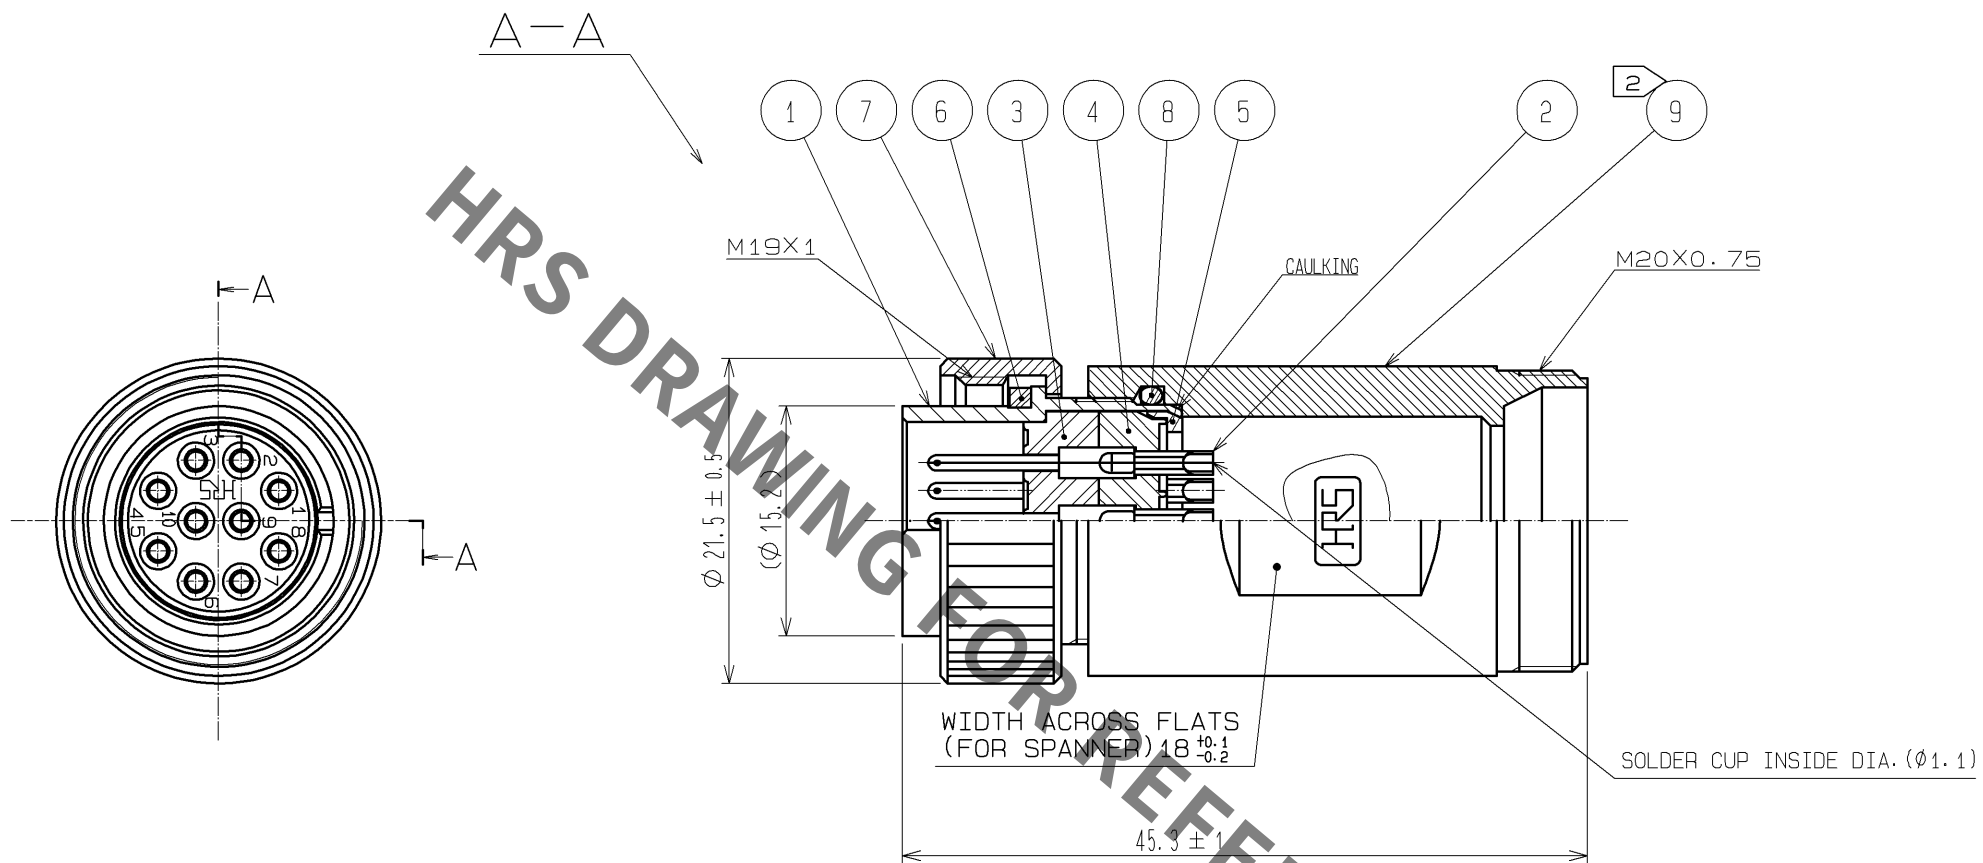

- NOTES
- 1 SILVER PLATING 2μm min.
 - 2 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑨: 3N·m.
LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑨ FROM LOOSENING.
 - 3 THIS PRODUCTS TO BE USED WITH CABLE CLAMP, JR16WCC-※(72).
※ DESIGNATE DIAMETER(mm) OF APPLICABLE CABLE.
 - 4 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑨ TO REF. NO. ① IS SHOWN.
 - 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE, PLEASE CONFIRM BEFORE THE USE.

5	POLYACETAL	(WHITE)					
4	DIALLYL PHTHALATE	(BLACK) UL94V-0	9	ZINC ALLOY	CHROME PLATING		
3	DIALLYL PHTHALATE	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)		
2	PHOSPHOR BRONZE	1	7	BRASS	CHROME PLATING		
1	ZINC ALLOY	CHROME PLATING	6	SILICONE RUBBER	(RED)		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS	

UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.					APPROVED :EJ. KUNII	12.10.01	DRAWING NO.	EDC3-111159-71		
					CHECED :EJ. KUNII	12.10.01	PART NO.	RM15WTPZA-10P(71)		
					DESIGNED :HY. KISHI	12.09.28	CODE NO.	CL109-1737-3-71		
					DRAWN :HY. KISHI	12.09.28	1/1			