


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

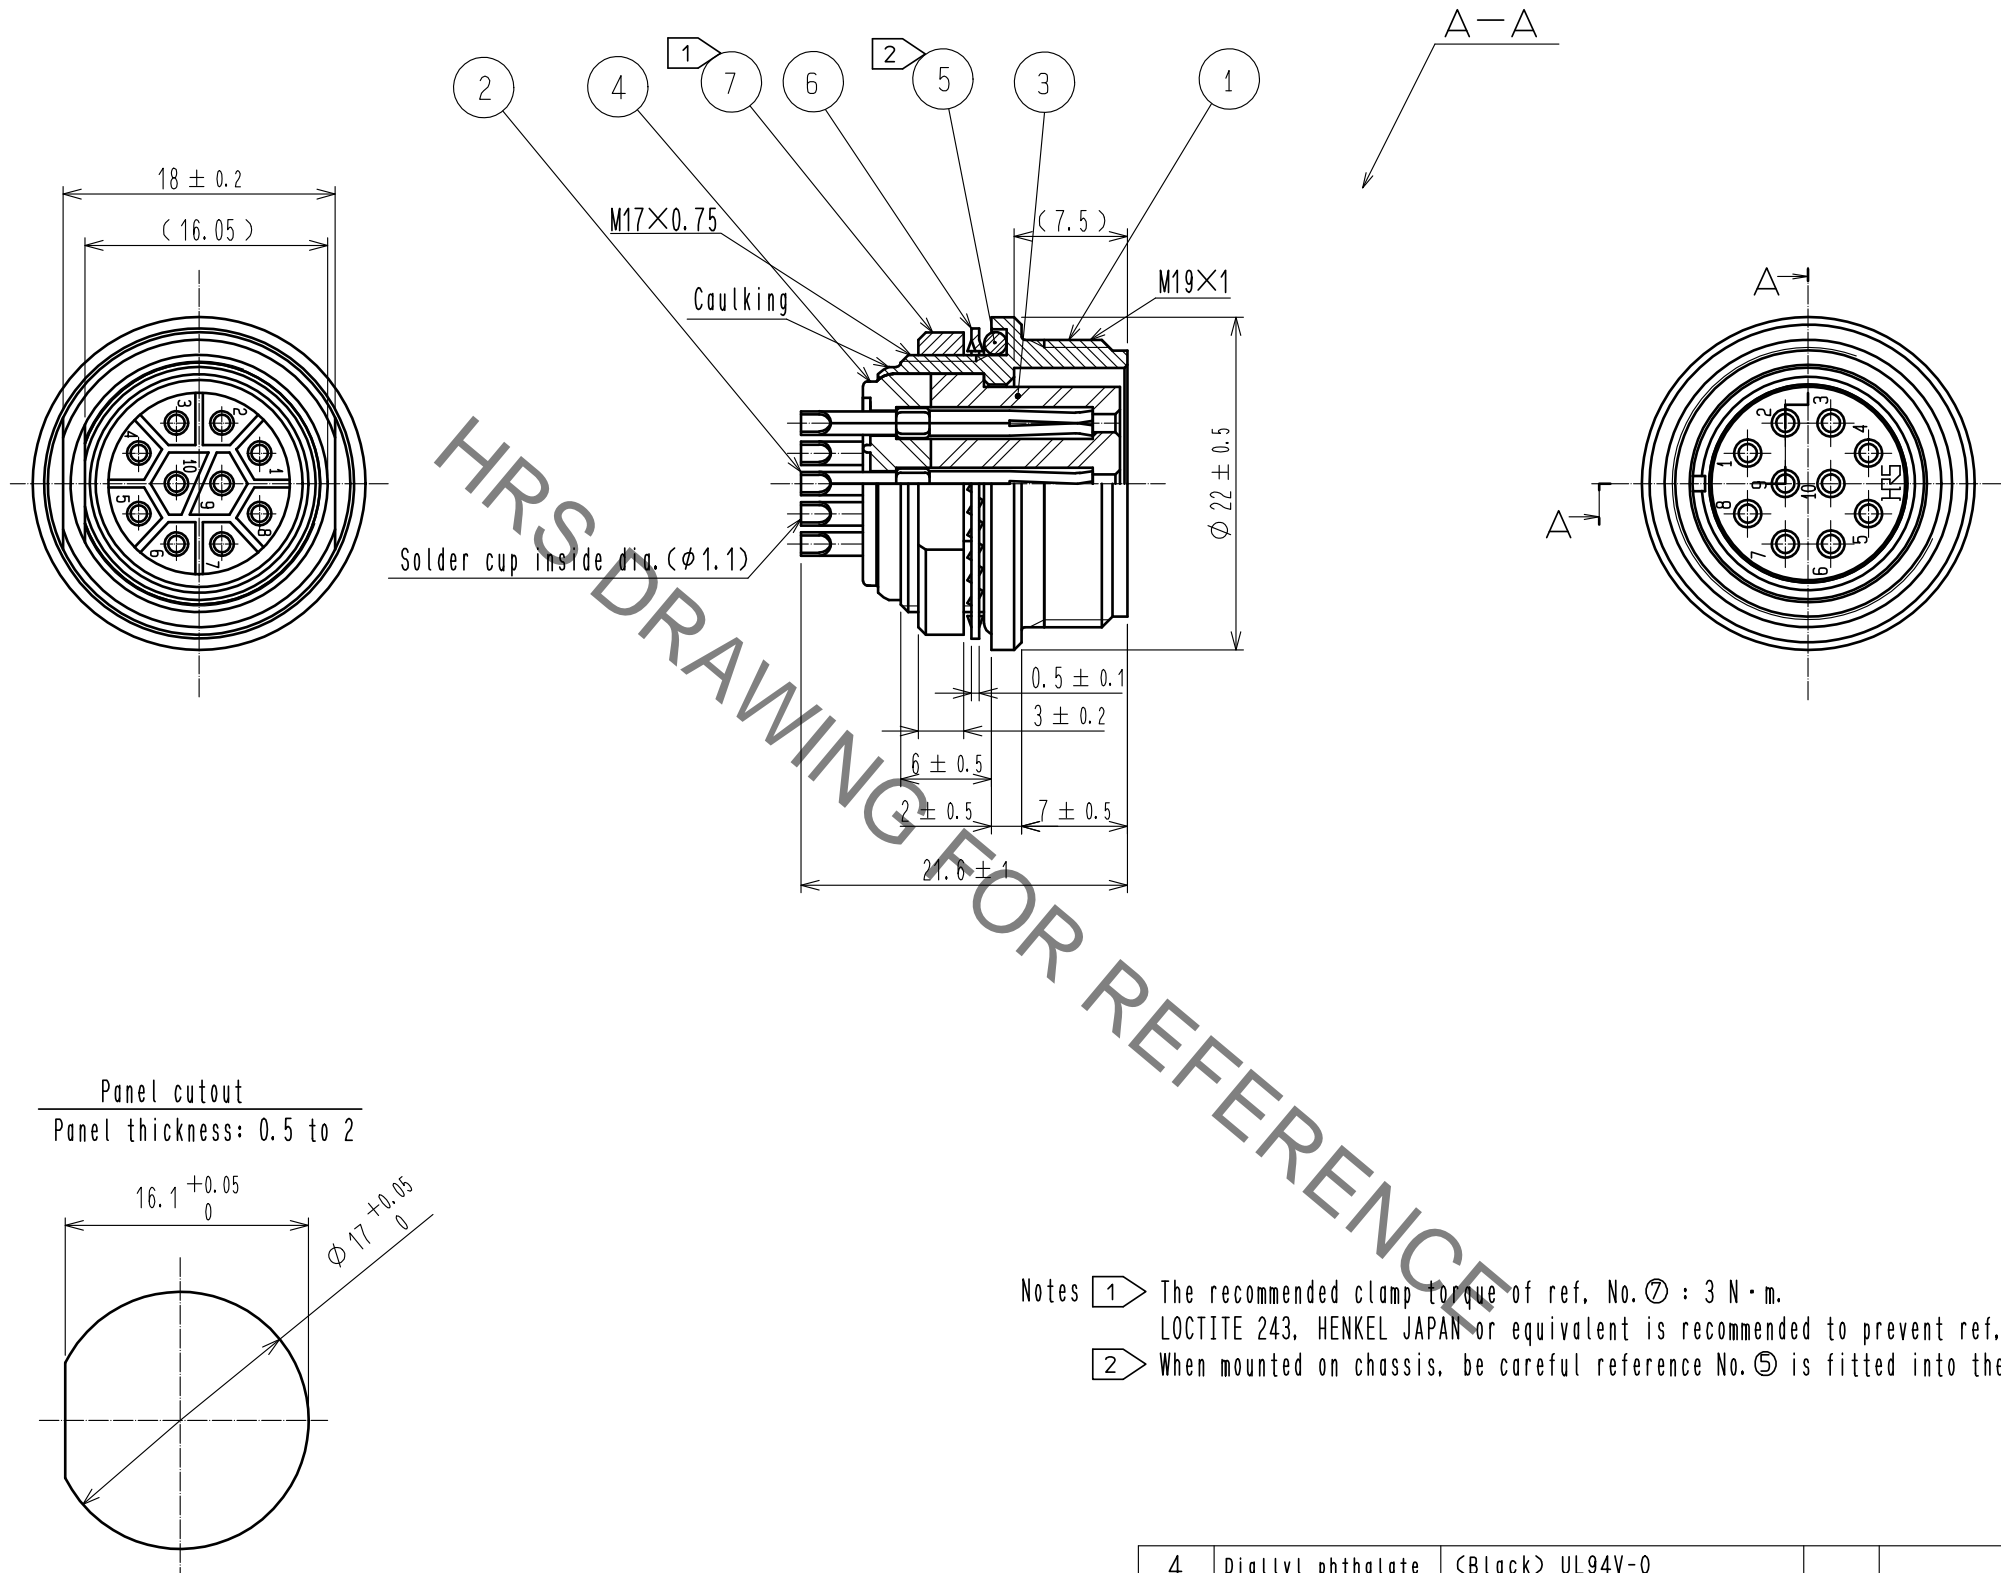

- Notes ① The recommended clamp torque of ref. No. ⑦ : 3 N·m.  
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑦ from loosening.  
② When mounted on chassis, be careful reference No. ⑤ is fitted into the indicates groove any biting.

4	Diallyl phthalate	(Black) UL94V-0			
3	Diallyl phthalate	(Black) UL94V-0	7	Brass	Nickel plating
2	Copper alloy	Silver plating 5μm min.	6	Phosphor bronze	Nickel plating
1	Zink alloy	Chrome plating	5	Silicon rubber	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : SU. OBARA	16. 03. 16	DRAWING NO.	EDC-111081-71-00
		CHECKED : HY. KOBAYASHI	16. 03. 16	PART NO.	RM15WTRZ-10S(71)
		DESIGNED : DS. MATSUNE	16. 03. 16	CODE NO.	CL109-1641-6-71
		DRAWN : DS. MATSUNE	16. 03. 16		