
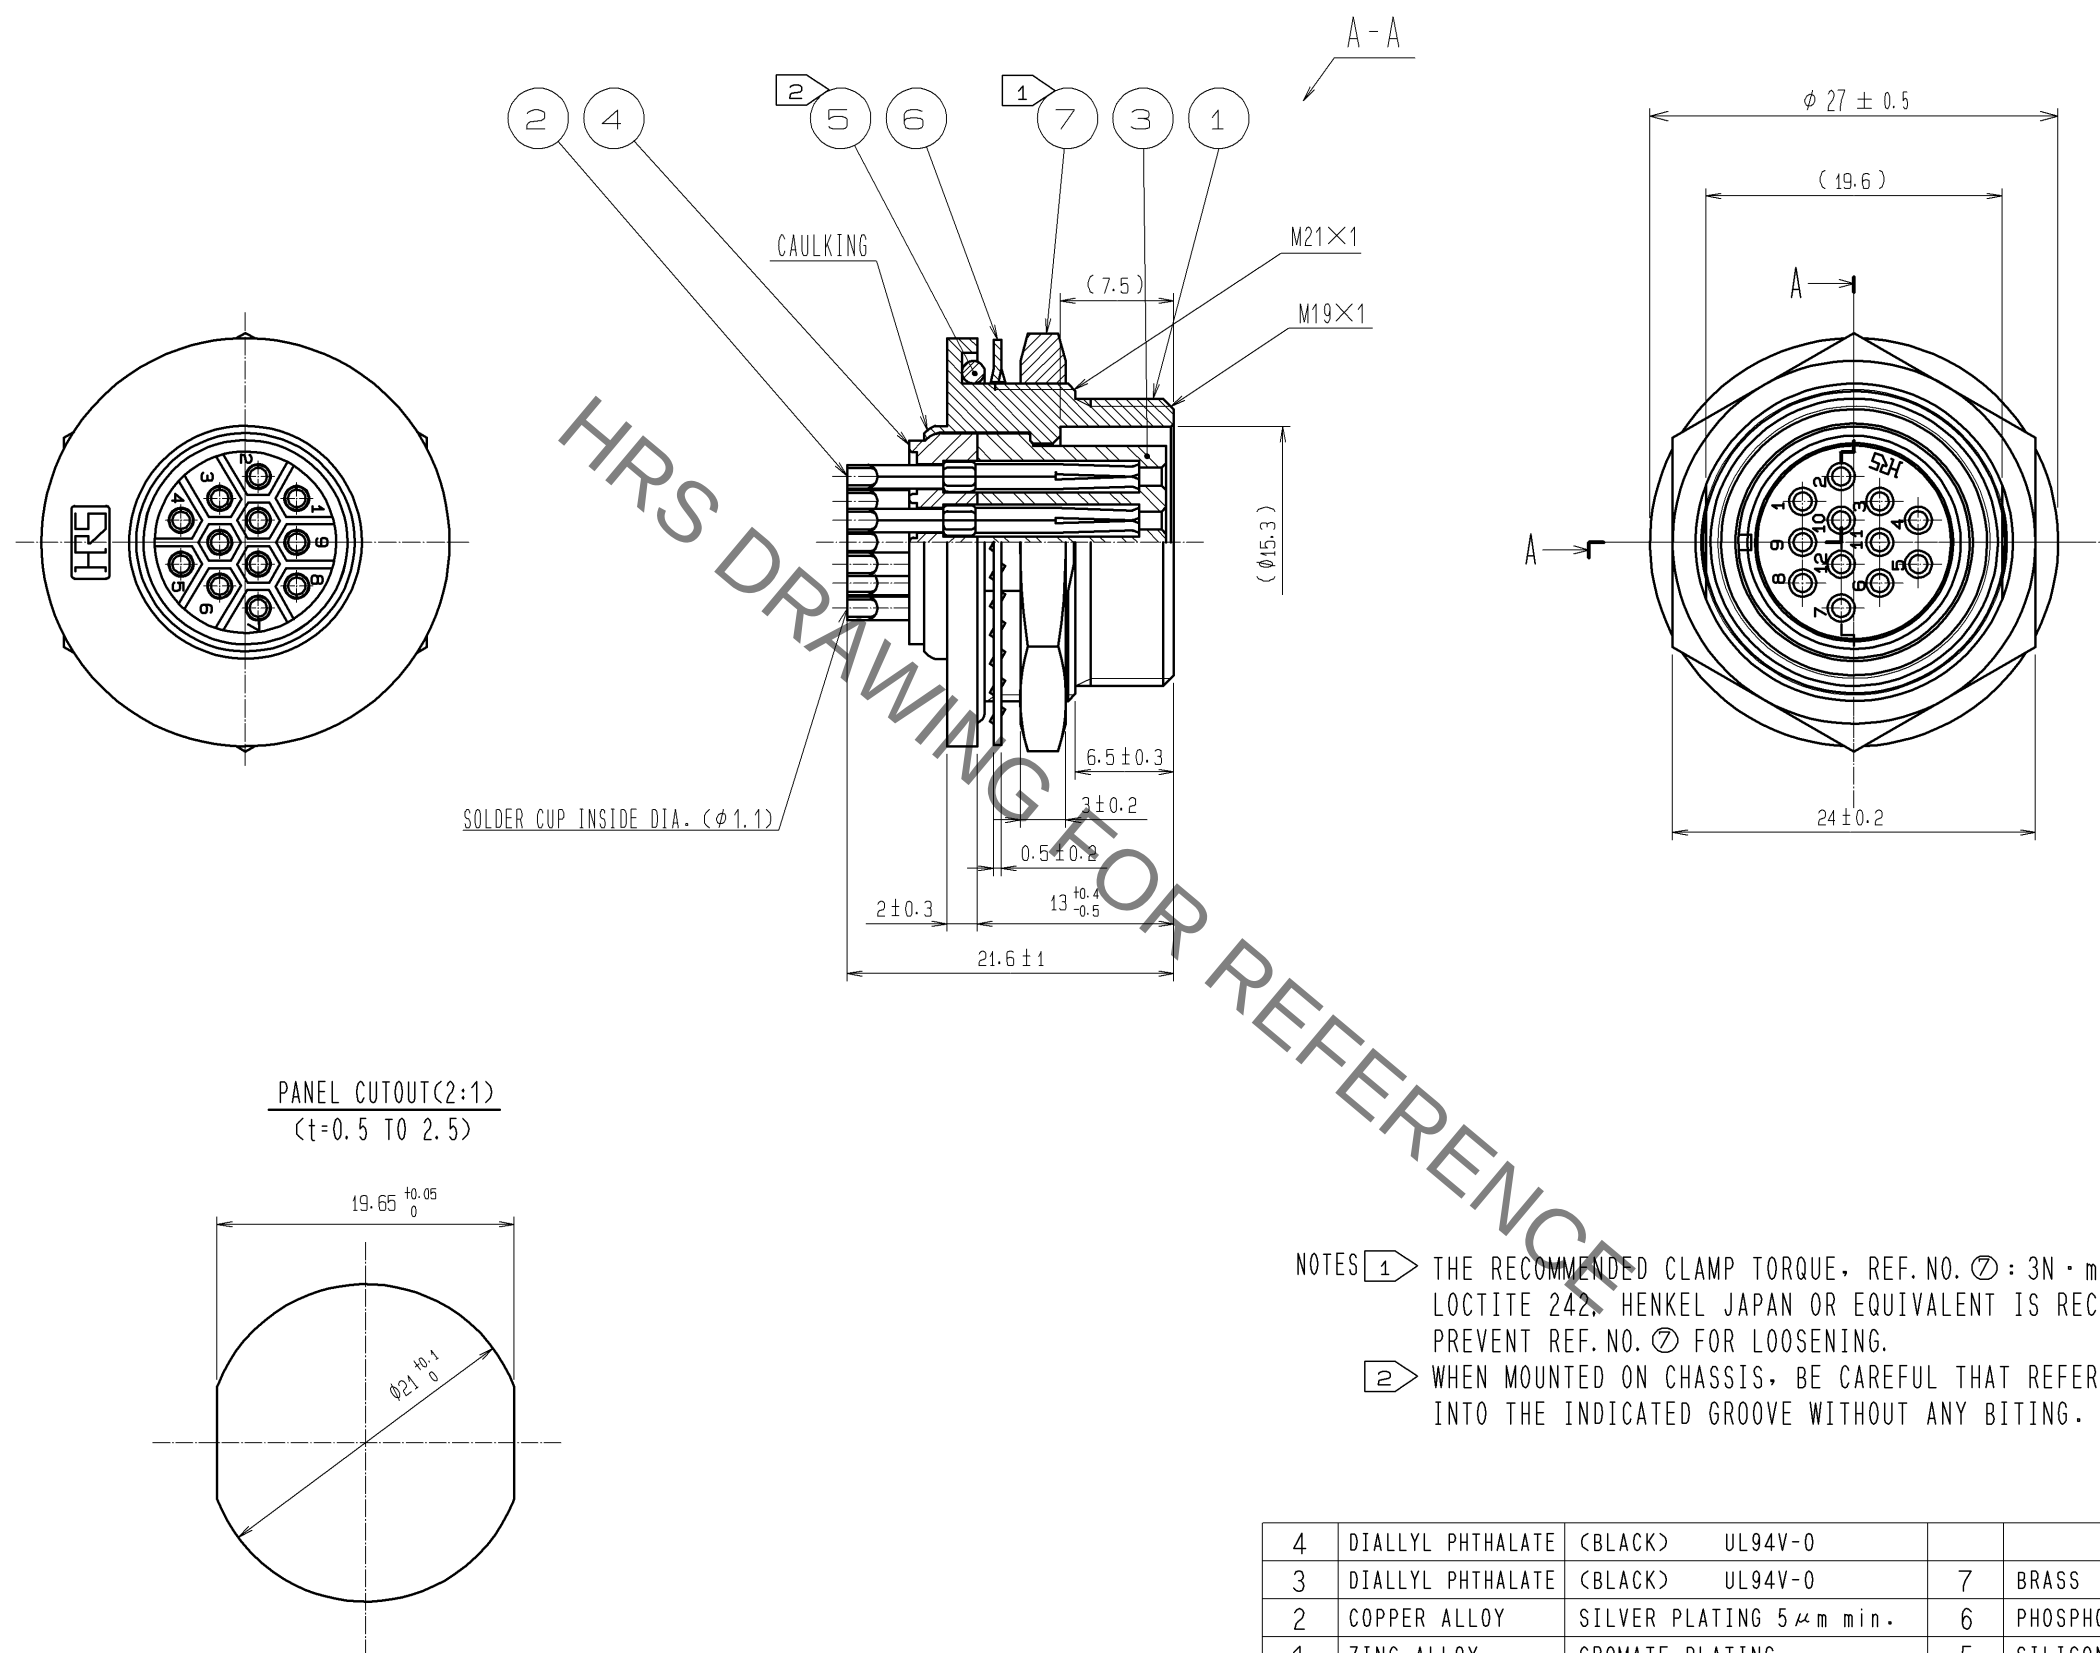




- NOTES ① THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑦ : 3N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑦ FOR LOOSENING.
- ② WHEN MOUNTED ON CHASSIS, BE CAREFUL THAT REFERENCE NO. ⑤ IS FITTED
INTO THE INDICATED GROOVE WITHOUT ANY BITING.

4	DIALLYL PHTHALATE	(BLACK)	UL94V-0			
3	DIALLYL PHTHALATE	(BLACK)	UL94V-0	7	BRASS	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5 μm min.		6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	CROMATE PLATING		5	SILICONE RUBBER	(BLACK)
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS

UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH		08.06.27		DRAWING NO.		EDC3-111092-71		
		CHECKED : HY. KOBAYASHI		08.06.27		PART NO.		RM15WTRZA-12S(71)		
		DESIGNED : HN. TANAKA		08.06.05		CODE NO.		CL109-1662-6-71		
		DRAWN : HN. TANAKA		08.06.05				 1/1		