
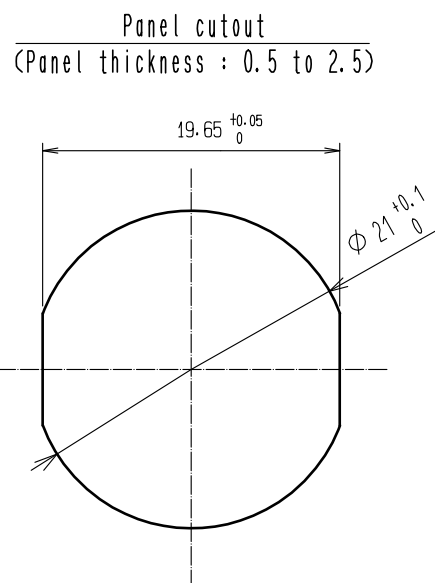




Notes

- 1 The recommended clamp torque of ref. No. ⑦: 3 N·m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑦ from loosening.
- 2 When mounted on chassis, be careful reference No. ⑤ is fitted into the indicates groove any biting.

4	Diallyl phthalate	(Black) UL94V-0			
3	Diallyl phthalate	(Black) UL94V-0	7	Brass	Nickel plating
2	Copper alloy	Silver plating 5 μm min.	6	Phosphor bronze	Nickel plating
1	Zinc alloy	Chrome plating	5	Silicone rubber	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	16.01.22	DRAWING NO.	EDC-111090-71-00			
		CHECKED : HY. KOBAYASHI	16.01.22	PART NO.	RM15WTRZA-8S<71>			
		DESIGNED : KN. IKEHARA	16.01.22	CODE NO.	CL109-1660-0-71			
		DRAWN : KN. IKEHARA	16.01.22					