




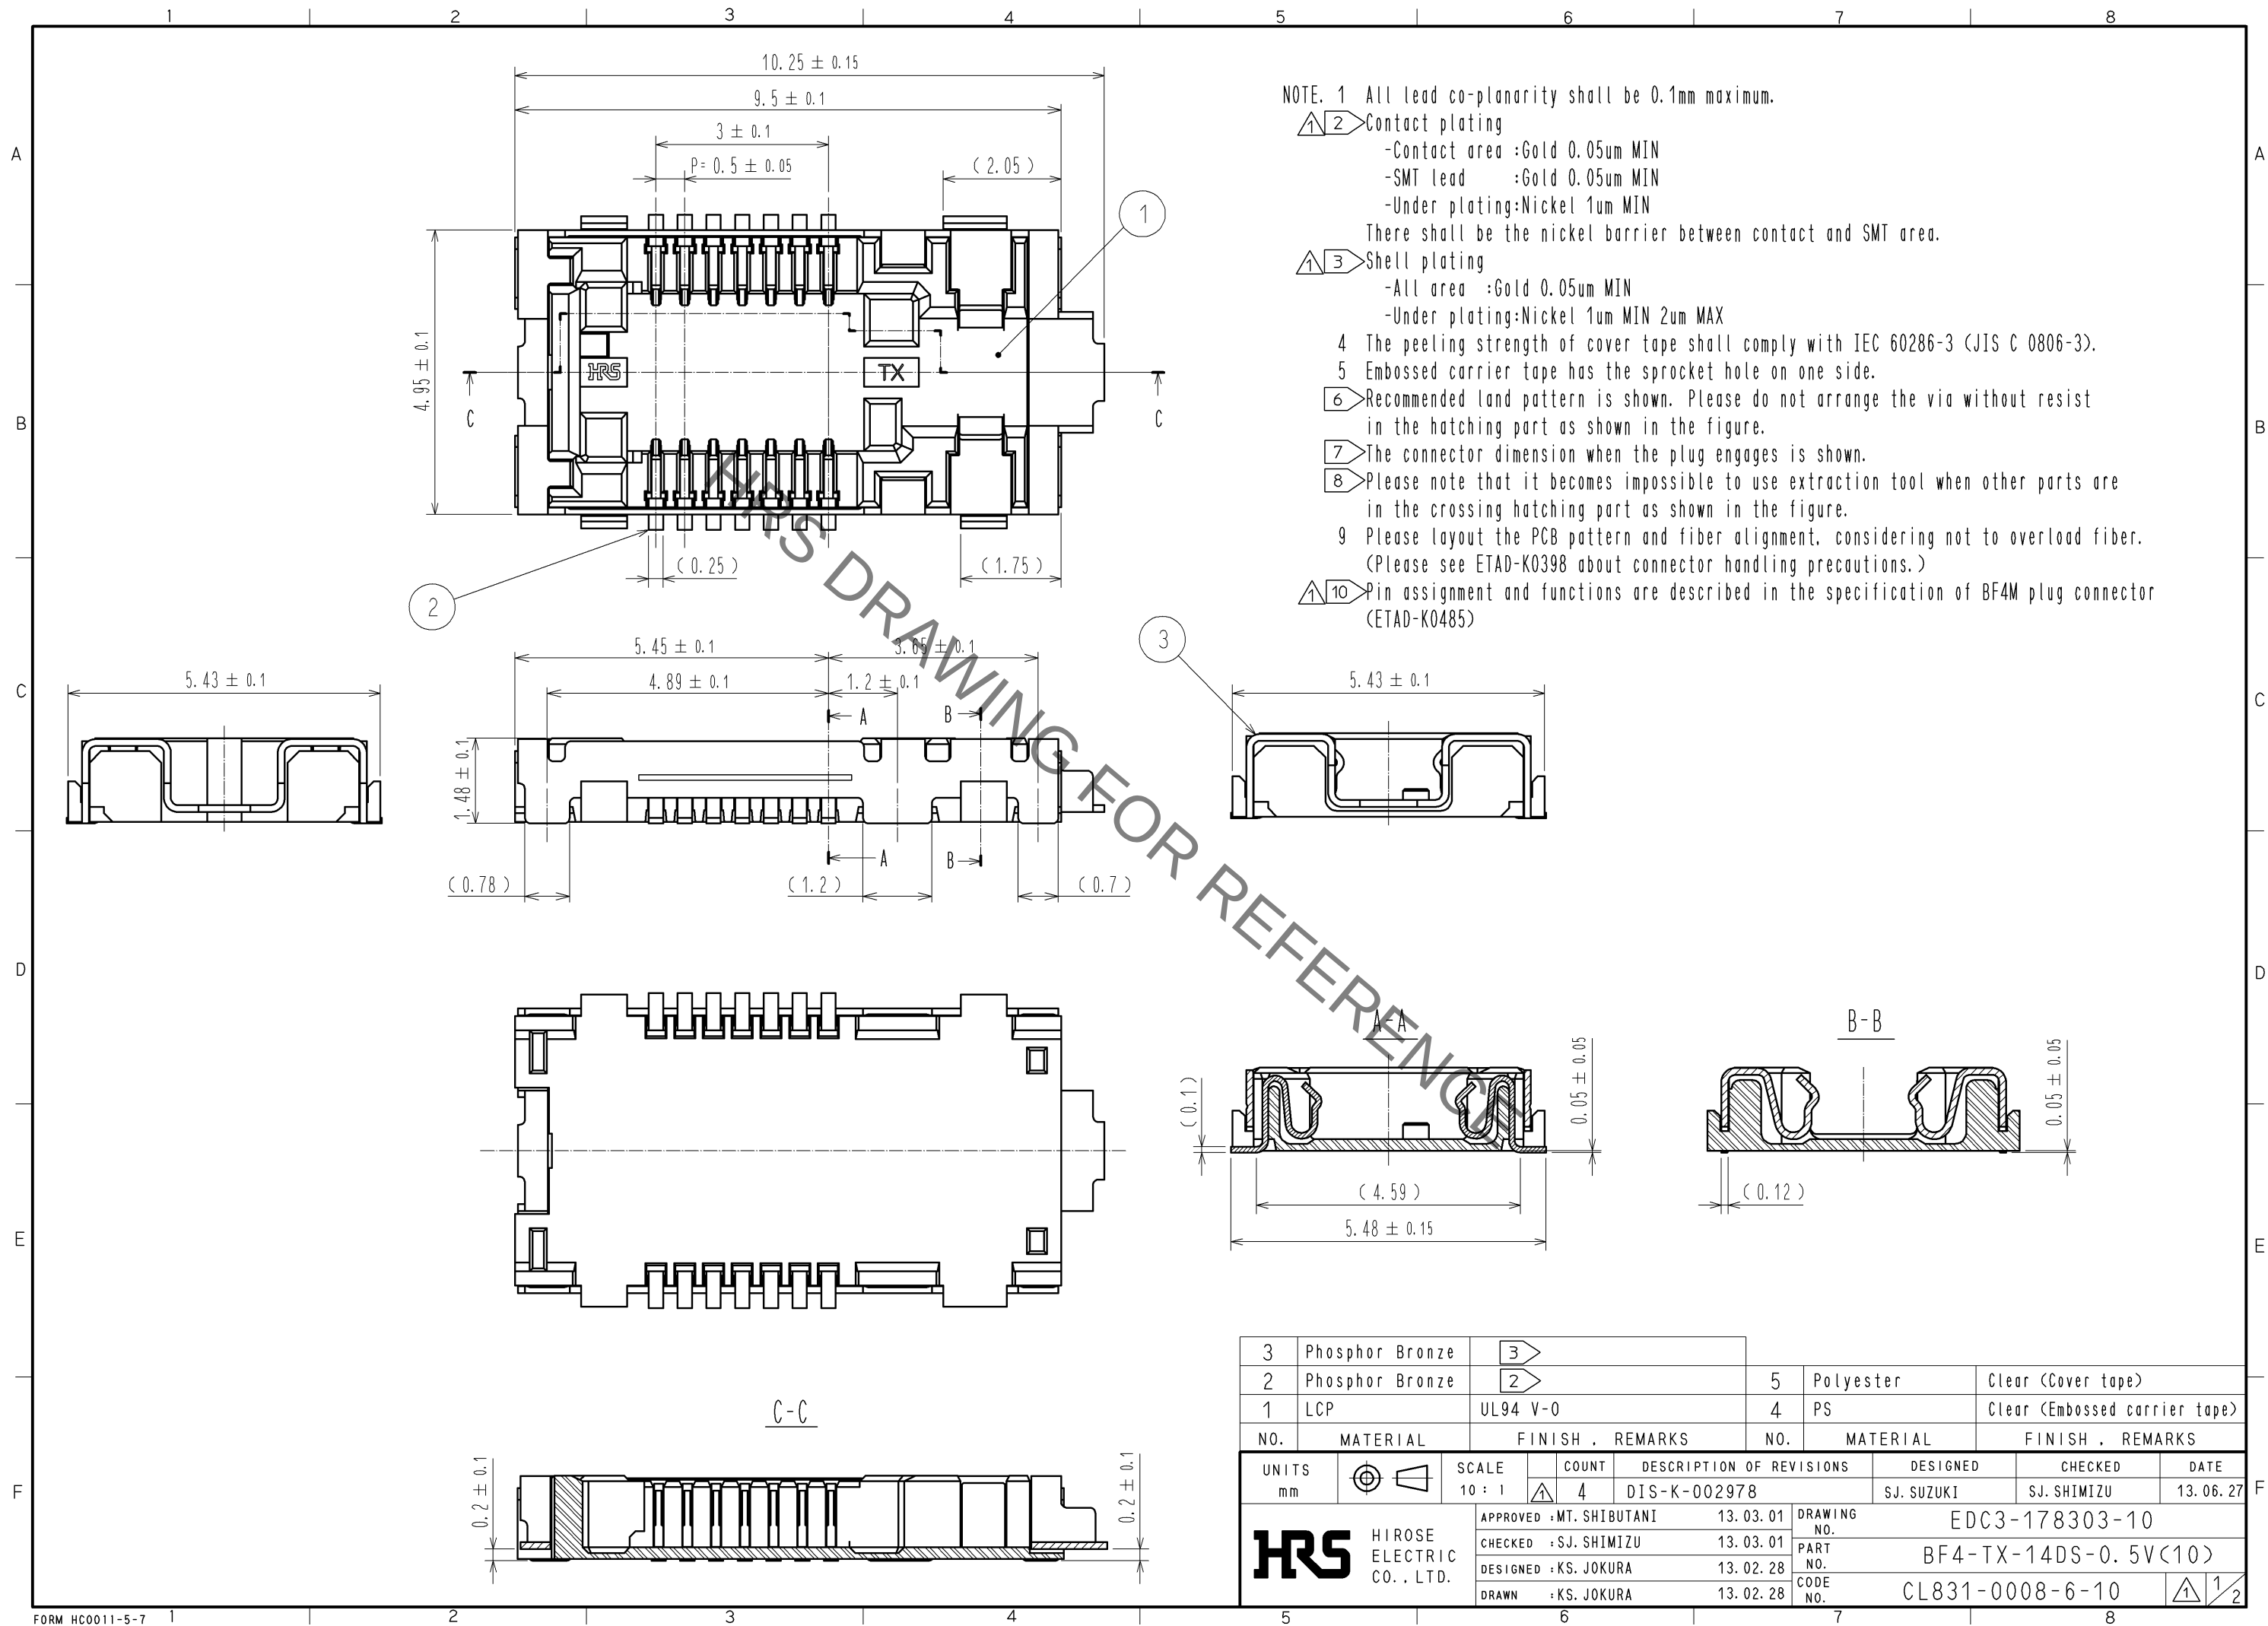

Recommended reflow temperature profile
using Lead-Free solder paste.

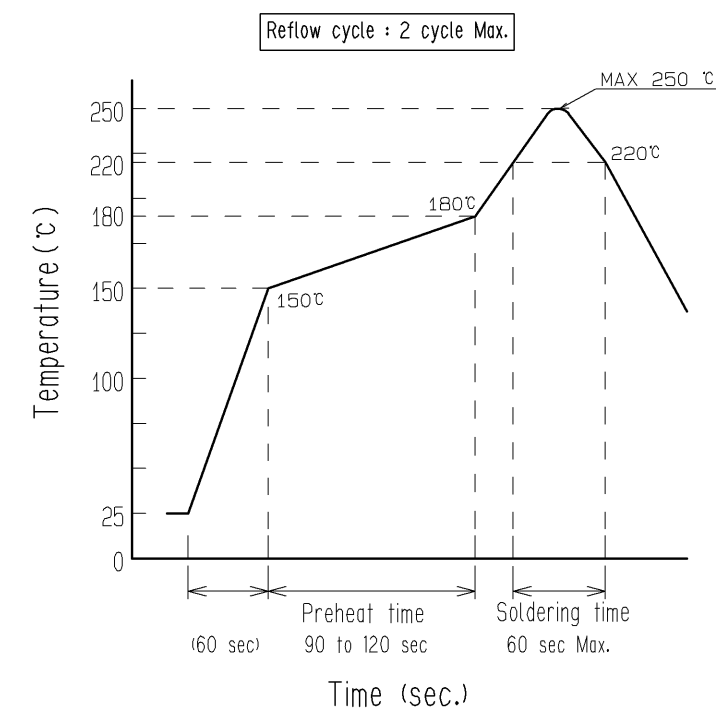

7 Dimensions of engaged connector (Scale : FREE)

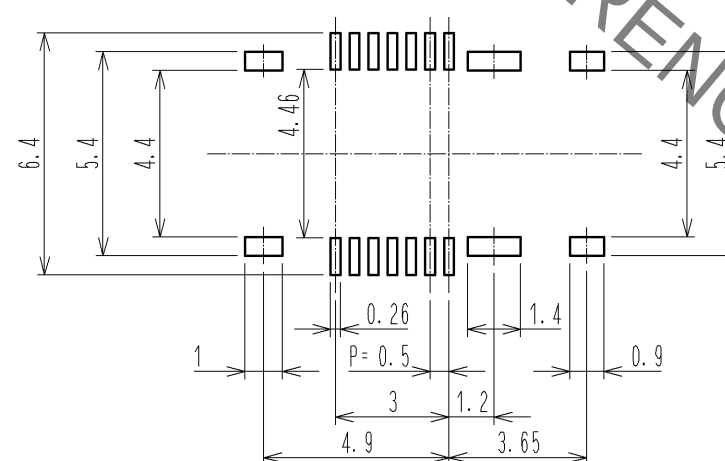

Aperture ratio
 Pads mounted contacts : 70%
 Pads mounted shell : 100%

