

PicoSource™ AS108

8 GHz Agile Synthesizer



Professional and portable performance at low cost

300 kHz to 8 GHz operation
 -15 dBm to +15 dBm dynamic range
 Fast 55 μ s frequency settling time to 10 ppm
 Fast amplitude settling: < 25 μ s to 1 dB and < 200 μ s to 0.1 dB
 Sweep, hop and list frequency and level or phase and level
 -100 dBc/Hz phase noise typical at 1 GHz and 10 kHz offset
 FM, \varnothing M and AM modulation, internal sine or external input
 Configurable stand-alone operation mode
 External reference clock I/O and trigger I/O
 Compact and portable

Use sweep lists to emulate schemes such as QPSK, QAM, ASK, FSK
 Adjustable dwell and trigger sweep or trigger next point modes
 Work in and convert units of measure to suit application
 Programming examples for LabVIEW, C, C#, Python, MATLAB
 Suited to bench, field and system integration applications
 USB-controlled from Windows PC and display or tablet
 Touch, mouse, keyboard or remote interface software (API included)
 Multi-unit operation with synchronized modulation, sweeps, hops and lists

Product overview – PicoSource AS108 Agile Synthesizer

The PicoSource™ AS108 Agile Synthesizer is designed to meet the needs of both benchtop and integrated module applications. Its broad 300 kHz to 8 GHz frequency range, fast settling and programmable phase, frequency and amplitude match it to a wide range of applications, with the added advantages of low cost, small footprint and 12 to 15 V power requirement. The AS108 has professional-grade performance that is effective in both static and parameter-agile applications, making it a bench or field instrument for developers, scientists, educators, students, and service and installation technicians. Its speed, external clock referencing, trigger capabilities and user programmable power-up mode all suit it to system integrations such as automated test, unmanned installations and multi-signal stimulus.

The AS108 is a full-function USB controlled vector (IQ) modulating signal synthesizer. It is supplied with a clean, easy and efficient user interface for controlling its amplitude, frequency and phase agility; including modulations, sweeps, hopping and list modes from Microsoft Windows. Multiple synthesizers can be controlled from multiple instances of the software running on a single controlling PC or device. Remote control is also possible using the API included.




PicoSynth 2 software

The PicoSynth 2 software presents a clean, efficient, touchscreen-compatible user interface for direct and convenient access to synthesis parameters. These can be typed, scrolled or stepped by a configurable increment value, in a selectable unit of measure such as dBm, mW, V RMS, V pk-pk or degrees & radians. Its flexibility matches or exceeds that of the traditional control panel of a benchtop synthesizer.

The controls are presented in three independent parameter tabs, each of which holds separate settings for convenient switching of functionality:

- Carrier wave and basic modulations
- Sweep or hopping of parameters
- Arbitrary list of parameters

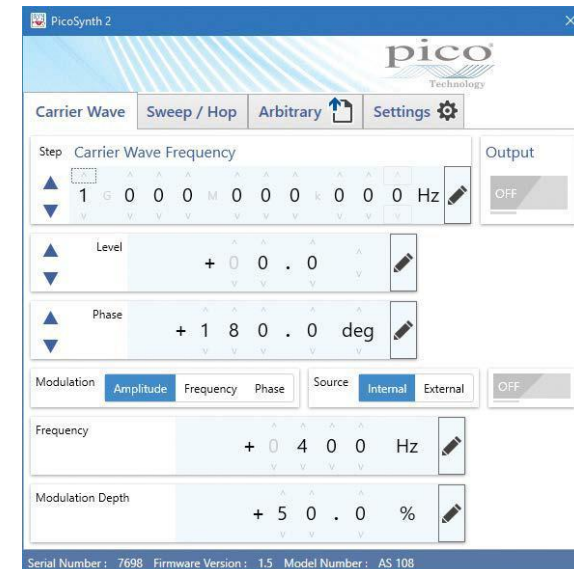

Carrier wave and basic modulations

Set carrier wave frequency, level and phase using typed values or scrolled digits, or by stepping by an increment of your choice, and then enable the output.

When required add frequency (FM), phase (ØM or PM) or amplitude (AM) modulation using internal sine modulation synthesis or an external DC-coupled source connected to the front-panel BNC interface. Modulations are derived from digital IQ modulation and the external trigger output (rear-panel BNC) is synchronous with the internal modulation source.

Three independent parameter tabs
Fast and convenient switching between CW, sweep/hop and list modes.

Carrier wave control parameters
Type values, scroll digits or step by selected amount

Modulation controls
Type, source and enable

Internal modulation source parameters
Frequency and depth

Typed entry of parameters
With relevant standard multipliers

Selectable units of measure
Work in or convert to your chosen units of measure

The screenshot displays the PicoSynth 2 software interface. At the top, there are four tabs: 'Carrier Wave', 'Sweep / Hop', 'Arbitrary', and 'Settings'. The 'Carrier Wave' tab is active. Below the tabs, there are several control sections. The 'Carrier Wave Frequency' section has a 'Step' button and a frequency display showing '1 G 0 0 0 M 0 0 0 k 0 0 0 Hz'. The 'Level' section shows '+ 0 1 . 0 0 0 mW'. The 'Phase' section shows '+ 1 8 0 . 0 deg'. The 'Modulation' section has three sub-tabs: 'Amplitude', 'Frequency', and 'Phase'. The 'Amplitude' sub-tab is active, showing 'Frequency' as '+ 0 4 0 0 Hz' and 'Modulation Depth' as '+ 5 0 . 0 %'. The 'Source' section has 'Internal' and 'External' options, with 'Internal' selected. An 'Output' button with an 'ON' indicator is on the right. A numeric keypad with standard multipliers (k, M, G) is also visible. At the bottom, the serial number, firmware version, and model number are displayed.

Sweep or hop parameters

Set up sweeps and hops between two parameter values: start of sweep and end of sweep (stop). Either can be the higher value. Set the number of points in a sweep (between 2 and 10,001 points). The dwell time then defines a duration for which each point in the sweep will be output. PicoSynth calculates and displays the duration of the whole sweep and the linear step size between each point. A bidirectional sweep will sweep from the start to stop and back to start in completing a single sweep of the parameter. A hop is a limited case of sweep in which there are only two parameter values that are alternately output.

The AS108 can sweep or hop the frequency, level or phase parameter. It can also sweep or hop two parameters at the same time: frequency and level, or phase and level. This allows, for instance, a simple linear flatness or loss-compensating profile to be applied to a sweep or hop, perhaps increasing output level as frequency increases. The example shown applies a 5 dBm increase in level as the frequency sweeps from 1 GHz to 2 GHz.

Sweeps and hops can be synchronized to external events and instruments using the external trigger input and output (rear panel BNCs) or software trigger. Trigger occurs at, or initiates, a sweep start or next point in sweep. This synchronization flexibility can be of particular value to high-speed system sequencing in, for example, high-speed test.

Select sweep or hop mode and type Single and dual parameter

Frequency start and stop values

Level start and stop values

Set number of sweep points and the dwell period between them

Resulting step sizes and sweep duration


Synchronize the sweep to a trigger
Internal clock, external input or software trigger sources.
Trigger a sweep or trigger next point in sweep.

The screenshot shows the PicoSynth 2 interface with the following settings:
- **Carrier Wave:** Sweep / Hop
- **Mode:** Sweep
- **Type:** Frequency
- **Frequency:** 1 GHz to 2 GHz
- **Level:** +01.0000 mW
- **Dwell Time:** +010000 µs
- **Points:** +10000 pts
- **Frequency Step:** 1 001 001 Hz
- **Sweep Duration:** 1.000000 s
- **Trigger:** Internal

Arbitrary parameter list

Import a parameter list file to generate an arbitrary sequence of frequency/ level or phase/level points. The file is in a straightforward comma-separated values (CSV) format that you can create using any text editor or export from a spreadsheet program.

PicoSynth 2 shows a summary of the file contents to help you verify that you have selected the correct file. You can program the dwell time (time between points) and trigger mode.

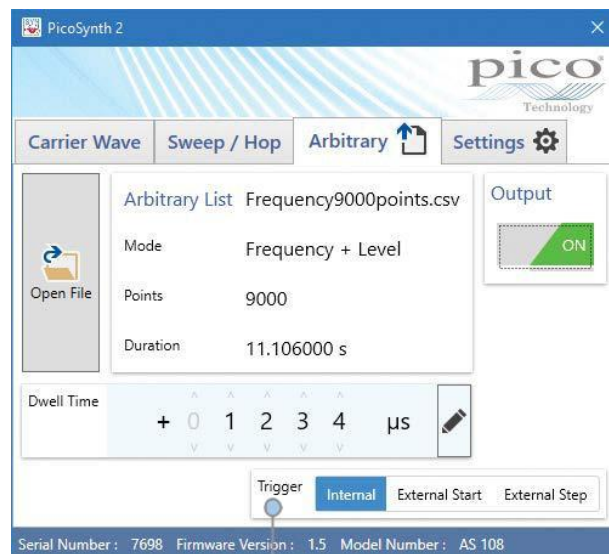

Trigger mode


Internal: run continuously with the specified dwell time.
External Start: run the whole file, with the specified dwell time, after each trigger event.
External Step: generate one point for each trigger event (ignoring dwell time setting).

| | A | B | C | D | E |
|----|-------|-----------|-------|-------|-------------------|
| 1 | Level | Frequency | Phase | Dwell | Mode |
| 2 | 0 | 10000001 | 0 | 1234 | FrequencyAndLevel |
| 3 | 0 | 10000002 | 0 | | |
| 4 | 0 | 10000003 | 0 | | |
| 5 | 0 | 10000004 | 0 | | |
| 6 | 0 | 10000005 | 0 | | |
| 7 | 0 | 10000006 | 0 | | |
| 8 | 0 | 10000007 | 0 | | |
| 9 | 0 | 10000008 | 0 | | |
| 10 | 0 | 10000009 | 0 | | |
| 11 | 0 | 10000010 | 0 | | |
| 12 | 0 | 10000011 | 90 | | |
| 13 | 0 | 10000012 | 90 | | |
| 14 | 0 | 10000013 | 90 | | |
| 15 | 0 | 10000014 | 90 | | |
| 16 | 0 | 10000015 | 90 | | |
| 17 | 0 | 10000016 | 90 | | |
| 18 | 0 | 10000017 | 90 | | |
| 19 | 0 | 10000018 | 90 | | |
| 20 | 0 | 10000019 | 90 | | |
| 21 | 0 | 10000020 | 90 | | |
| 22 | 0 | 10000021 | 180 | | |
| 23 | 0 | 10000022 | 180 | | |
| 24 | 0 | 10000023 | 180 | | |
| 25 | 0 | 10000024 | 180 | | |
| 26 | 0 | 10000025 | 180 | | |
| 27 | 0 | 10000026 | 180 | | |
| 28 | 0 | 10000027 | 180 | | |
| 29 | 0 | 10000028 | 180 | | |
| 30 | 0 | 10000029 | 180 | | |
| 31 | 0 | 10000030 | 180 | | |
| 32 | 0 | 10000031 | 270 | | |
| 33 | 0 | 10000032 | 270 | | |
| 34 | 0 | 10000033 | 270 | | |
| 35 | 0 | 10000034 | 270 | | |
| 36 | 0 | 10000035 | 270 | | |
| 37 | 0 | 10000036 | 270 | | |
| 38 | 0 | 10000037 | 270 | | |
| 39 | 0 | 10000038 | 270 | | |
| 40 | 0 | 10000039 | 270 | | |
| 41 | 0 | 10000040 | 270 | | |

Save, recall and other settings

Parameter step increment values and the saving and recall of user settings are addressed under the **Settings** tab.

You can also load modified power-up settings from here to write to the device, allowing the signal source to power up in a known state without further connection or control over USB.

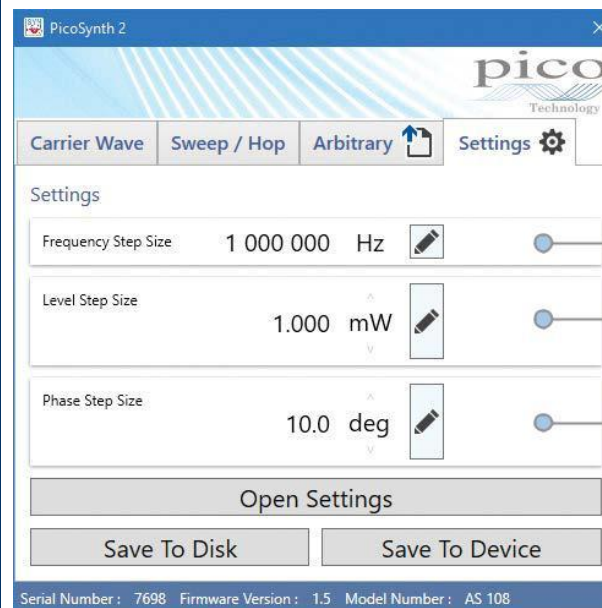

Frequency step size

Used by frequency up/down controls

Level step size

Used by level up/down controls

Phase step size

Used by phase up/down controls

Remote control operation

The PicoSource AS108 is supplied with a DLL that allows you to control the device from C and C-compatible languages and applications such as C++, C#, Python, Keysight VEE, National Instruments LabVIEW and MathWorks MATLAB.


See the *PicoSource AS108 Programmer's Guide* for details.

Multiple device operation

You can control multiple AS108 signal synthesizers from a single PC by running multiple instances of the PicoSynth 2 software. Each time you start a new instance of PicoSynth 2, it will list all compatible connected devices that are not yet being controlled. You can then select any device in the list for connection.


Demonstration mode

The “User Interface Demo” device is always available in this list and allows PicoSynth 2 to run for demonstration purposes without a connected device. You can use this mode to try out the software before buying a device. The software is available for download and trial at www.picotech.com.

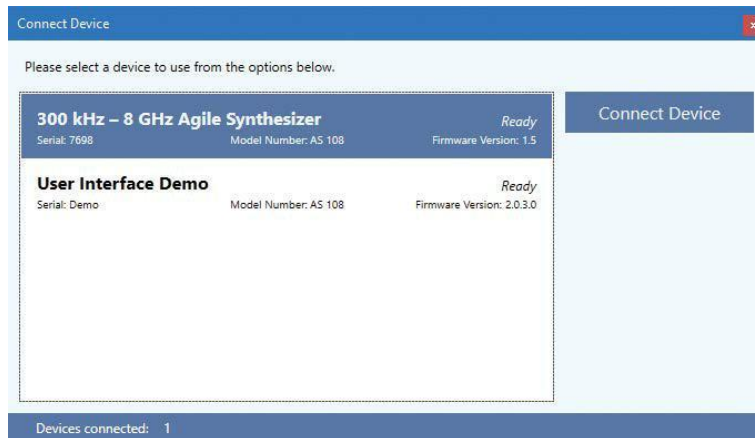

Specifications

| Parameter | Applicable range and values | | Condition |
|--|-----------------------------|----------------|---------------|
| General | | | |
| Standard conditions are ambient temperature of between 15°C and 30°C, 20 minutes after power-up. | | | |
| Carrier wave | | | |
| Frequency range | 300 kHz to 8.192 GHz | | |
| Frequency resolution | 300 kHz to 125 MHz | 0.1 Hz | |
| | > 125 MHz to 4 GHz | 10 Hz | |
| | > 4 GHz | 20 Hz | |
| Frequency settling time | to ±10 ppm | 55 μs maximum | 50 μs typical |
| Frequency accuracy (internal reference) | ±5 ppm | | |
| Output power range | −15 dBm to +15 dBm | | |
| Output power resolution | 0.1 dBm | | |
| Output power setting accuracy | ±1.5 dB | | |
| Output match (VSWR) | 1.8:1 maximum | 1.4:1 typical | |
| Output amplitude settling time | to ±1 dB | 25 μs maximum | |
| | to ±0.1 dB | 200 μs maximum | |
| Output protection | 25 V DC peak and 20 dBm | | |
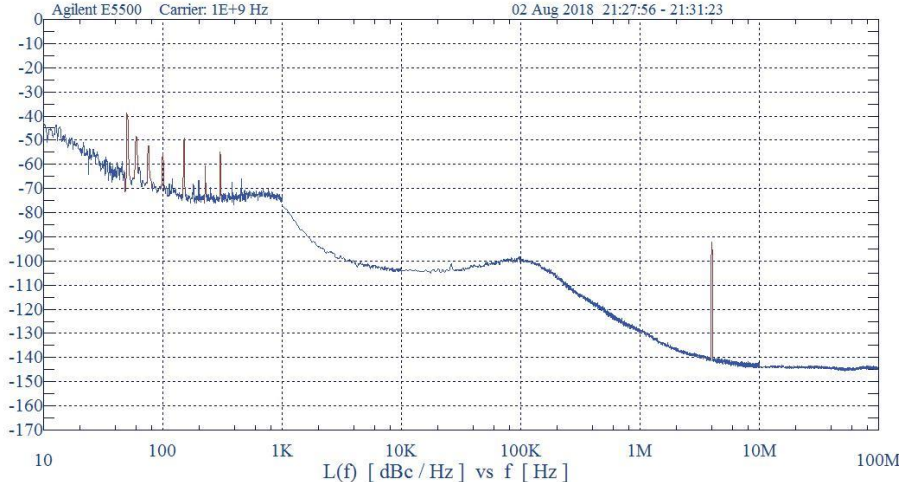
| | | |
|---------------------------------------|---|---------------------------------|
| Phase noise at 10 kHz offset | 1 GHz -98 dBc/Hz maximum -100 dBc/Hz typical 2 GHz -94 dBc/Hz maximum -96 dBc/Hz typical 4 GHz -88 dBc/Hz maximum -90 dBc/Hz typical 8 GHz -83 dBc/Hz maximum -85 dBc/Hz typical | |
| | <p>8GHz Synth, 15dBm v HP8665A @ 1GHz</p>  <p>Agilent E5500 Carrier: 1E+9 Hz 02 Aug 2018 21:27:56 - 21:31:23</p> <p>L(f) [dBc / Hz] vs f [Hz]</p> | Measured phase noise at 1 GHz |
| Harmonics | -20 dBc maximum -26 dBc typical | Output power set to +10 dBm |
| Sub-harmonics | -40 dBc maximum -46 dBc typical | Output power set to +10 dBm |
| Spurious | -50 dBc maximum -60 dBc typical | Output power set to +10 dBm |
| Modulation | | |
| Frequency range internal sine source | 10 Hz to 5 kHz | |
| Frequency resolution and accuracy | 1 Hz resolution ± 0.1% accuracy | |
| AM depth range | For carrier at 0 dBm 5% minimum 90% maximum 0 dBm to 9 dBm 5% minimum 50% maximum | |
| FM deviation | 2% carrier frequency or 200 kHz maximum | |
| External modulation input bandwidth | DC coupled to 10 kHz | |
| External modulation input sampling | 20 kS/s at 12 bit resolution | |
| External modulation input sensitivity | BNC(f) 600 Ω ±1 Vpk typical | for selected depth or deviation |
| External modulation input protection | 1 V pk | |

| Parameter | Interface and values | | | Condition |
|------------------------------------|----------------------|--------------------|--------------------|-------------------|
| Internal 10 MHz reference output | BNC(f) 50 Ω | 0 dBm minimum | 0 dBm typical | Into 50 Ω |
| External reference input | BNC(f) 50 Ω | –6 dBm sensitivity | 6 dBm maximum | |
| External reference lock range | ± 5 ppm | | | |
| Trigger input threshold voltage | BNC(f) 1 k Ω | 0.5 V minimum | 2.6 V maximum | |
| Trigger output logic levels | BNC(f) | Low 0.5 V maximum | High 3.6 V minimum | Into 1 k Ω |
| Trigger output rise and fall times | 40 ns maximum | | | |

| Parameter | Typical values and test conditions | Condition |
|-----------------------|---|----------------------|
| Power requirements | +12 V to +15 V DC, 12 W, 2.1 mm jack, centre pin positive | |
| Control interface | USB 2.0 | |
| Dimensions | W 173 mm x L 232 mm x H 56 mm | Excluding connectors |
| Weight | 1.78 kg | |
| Operating environment | +10°C to +40°C, 80% RH non-condensing, Pollution Degree II | |
| Storage environment | –20°C to +50°C, 80% RH non-condensing, Pollution Degree II | |
| Vibration | 0.5 g, 5 Hz to 300 Hz | |
| Safety | Declared conforming to: EN61010-1:2010 and EN61010-2-030:2010 Safety requirements for electrical equipment for measurement, control and laboratory use, general requirements and for testing and measuring circuits. Declared conforming to: EN61326-1:2013 Electrical equipment for measurement, control and laboratory use - EMC requirements. Group 1, Class B. (Emissions) EN61326-1:2013 Electrical equipment for measurement, control and laboratory use - EMC requirements. Basic Environment. (Immunity) EN61326-2-1:2013 Part 2-1: Test configurations, operational conditions and performance criteria for sensitive test and measurement equipment for unprotected applications. CFR 47 Code of Federal Regulations FCC: part 15 Subpart B – Frequency devices – unintentional radiators. Radiated emissions standard. Class A. | |
| EMC | | |

Ordering information

| Order code | Description |
|------------|---|
| PQ163 | PicoSource AS108 8 GHz Agile Synthesizer |
| TA314 | Inter-series adaptor 18 GHz 50 Ω SMA(f)–N(m) |
| TA181 | Attenuator 3 dB 10 GHz 50 Ω SMA(m–f) |
| TA261 | Attenuator 6 dB 10 GHz 50 Ω SMA(m–f) |
| TA262 | Attenuator 10 dB 10 GHz 50 Ω SMA(m–f) |
| TA173 | Attenuator 20 dB 10 GHz 50 Ω SMA(m–f) |
| TA265 | Precision sleeved coaxial cable 30 cm 1.3 dB @ 13 GHz |
| TA312 | Precision sleeved coaxial cable 60 cm 2.2 dB @ 13 GHz |
| TA358 | Dual-break torque wrench N-type 1 N·m / 8.85 in·lb |
| TA356 | Dual-break torque wrench SMA / PC3.5 / K-type, 1 N·m / 8.85 in·lb |

* Prices are correct at the time of publication. Sales taxes not included. Please contact Pico for the latest prices before ordering.

More RF products from Pico...

PicoScope 9000 Series
25 GHz
sampling oscilloscopes



PicoSource PG900 Series
40 ps
pulse generators



PicoVNA 106
6 GHz
vector network analyzer



PicoConnect
9 GHz
passive probes



UK global headquarters:

Pico Technology
James House
Colmworth Business Park
St. Neots
Cambridgeshire
PE19 8YP
United Kingdom

☎ +44 (0) 1480 396 395
☎ +44 (0) 1480 396 296
✉ sales@picotech.com

North America regional office:

Pico Technology
320 N Glenwood Blvd
Tyler
Texas 75702
United States

☎ +1 800 591 2796
☎ +1 620 272 0981
✉ sales@picotech.com

Asia-Pacific regional office:

Pico Technology
Room 2252, 22/F, Centro
568 Hengfeng Road
Zhabei District
Shanghai 200070
PR China

☎ +86 21 2226-5152
✉ pico.china@picotech.com

Errors and omissions excepted. *Pico Technology* is a registered trademark of Pico Technology Ltd. *PicoSource* is a trademark of Pico Technology Ltd.

are registered trademarks of Microsoft Corporation in the United States and other countries.
MM072.en-1. Copyright © 2018 Pico Technology Ltd. All rights reserved.

www.picotech.com



Pico Technology



@LifeAtPico



@picotechnologyltd



Pico Technology



@picotech