

Contents

- 1 Overview
 - 1.1 Product Highlights
- 2 Specifications
- 3 External Links

Overview

This xCHIP is equipped with a NEO-6M GPS receiver. The 50-channel u-blox 6 positioning engine boasts a Time-To-First-Fix (TTFF) of under 1 second. The dedicated acquisition engine, with 2 million correlators, is capable of massive parallel time/frequency space searches, enabling it to find satellites instantly. Innovative design and technology suppresses jamming sources and mitigates multipath effects, giving the NEO-6 GPS receivers excellent navigation performance even in the most challenging environments.

Product Highlights

- Low Power Consumption
- High Accuracy
- GPS

Specifications

- Based on the NEO-6M From uBlox
- 50 Channels
- GPS L1 frequency, C/A Code
- SBAS: WAAS, EGNOS, MSAS
- Cold Start² 27 s
- Warm Start² 27 s
- Hot Start² 1 s
- Aided Starts³ <3 s
- Tracking & Navigation -161 dBm
- Reacquisition⁵ -160 dBm
- Cold Start (without aiding) -147 dBm
- Hot Start -156 dBm
- Maximum Navigation update rate 5 Hz
- Configurable Timepulse frequency range 0.25 Hz to 1 kHz
- All satellites at -130 dBm

External Links


Documents

- NEO-6-GPS-Module From uBlox (https://www.u-blox.com/sites/default/files/products/documents/NEO-6_DataSheet_%28GPS.G6-HW-09005%29.pdf)


Shop

- Buy SN01 (<https://xinabox.cc/collections/sensors/products/sn01>)

SN01 - GNSS (GPS) (NEO-6M)

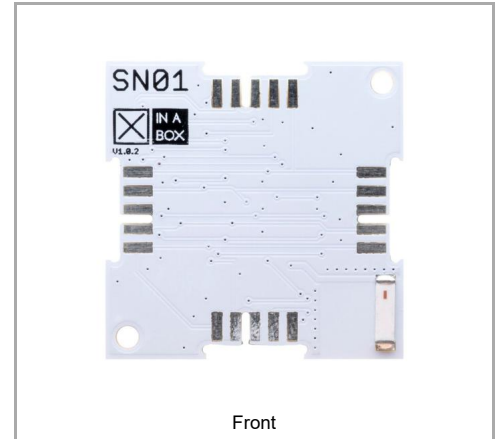

Front

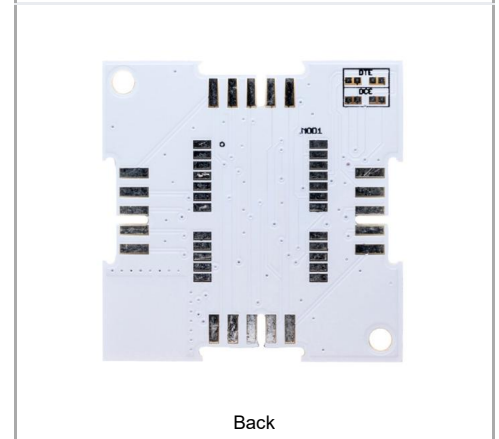

Back

☒CHIP	
Main Category	Sensor
Sub Category	Navigation
Introduced	1 January 2017
Current version	1.0.0
Current version date	1 January 2017
Dimensions	
Size	2x2U (32x32mm)
Weight	7.4 g
Height	7.9/6.6/0 mm
Main Chip Set	
Main Chip	L80/Neo 6
Serial Configuration	
Default Setting	DCE
Change Setting	via Solder Pads
I ² C Configuration	
Default Address	0x42