






← DIRECTION OF CONNECTOR LOADED INTO MACHINE.
LEADS FACING FRONT SIDE

REVISIONS			
SYM	ECN, ERN NO.	DATE	APPRD.
H	PER ECN E07102	APR16/07	L.C.
K	PROPOSAL	OCT 30/08	L.C.
L	IMPROVE RETENTION FORCE	MAY10/13	L.C.
M	ADD PULL OUT FORCE SPEC	MAY14/13	L.C.
N	ADD DIM. 0.635	DEC06/13	L.C.

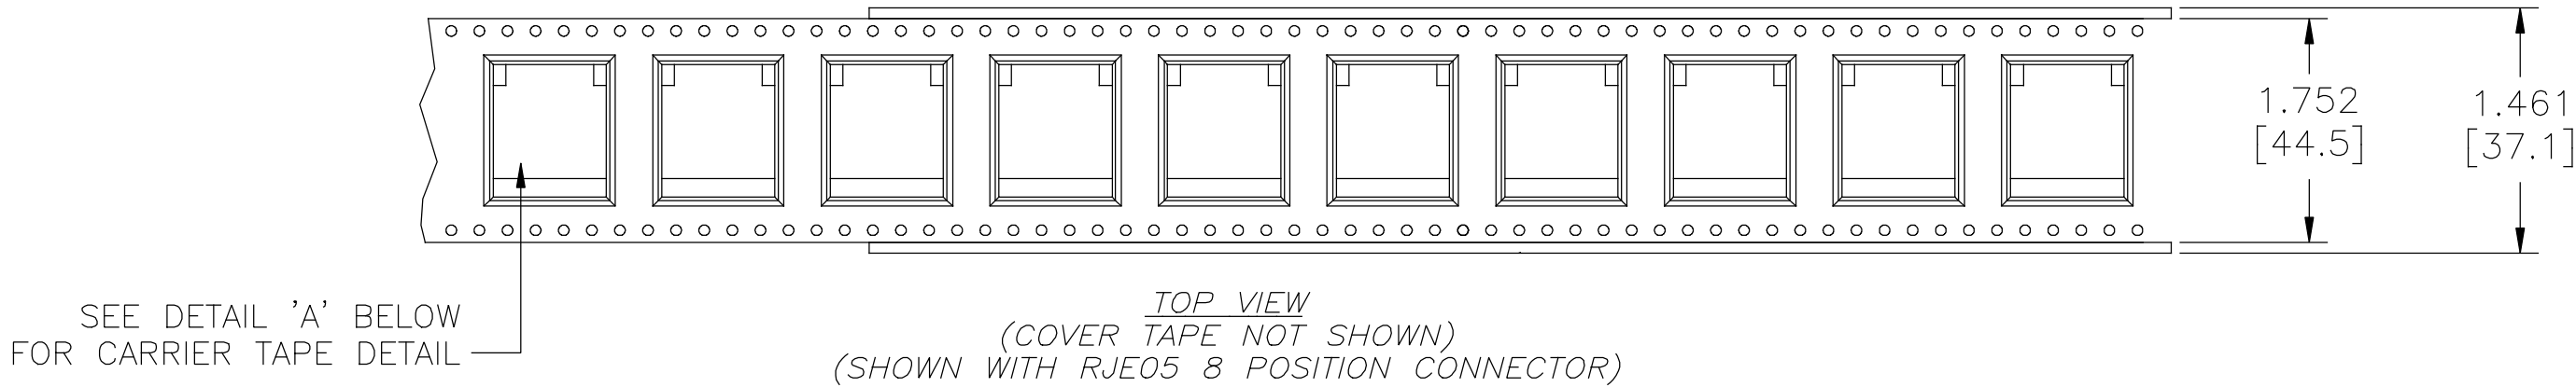

PACKAGING NOTES:

1. ONE REEL SHOULD HOLD 200 CONNECTORS.
2. 25 EMPTY CAVITIES FOR CARRIER TAPE LEADER & 10 EMPTY CAVITIES FOR CARRIER TAPE TRAILER.
3. A FULLY LOADED CARTON SHOULD CONTAIN 7 REELS (PCS) OF CONNECTORS.

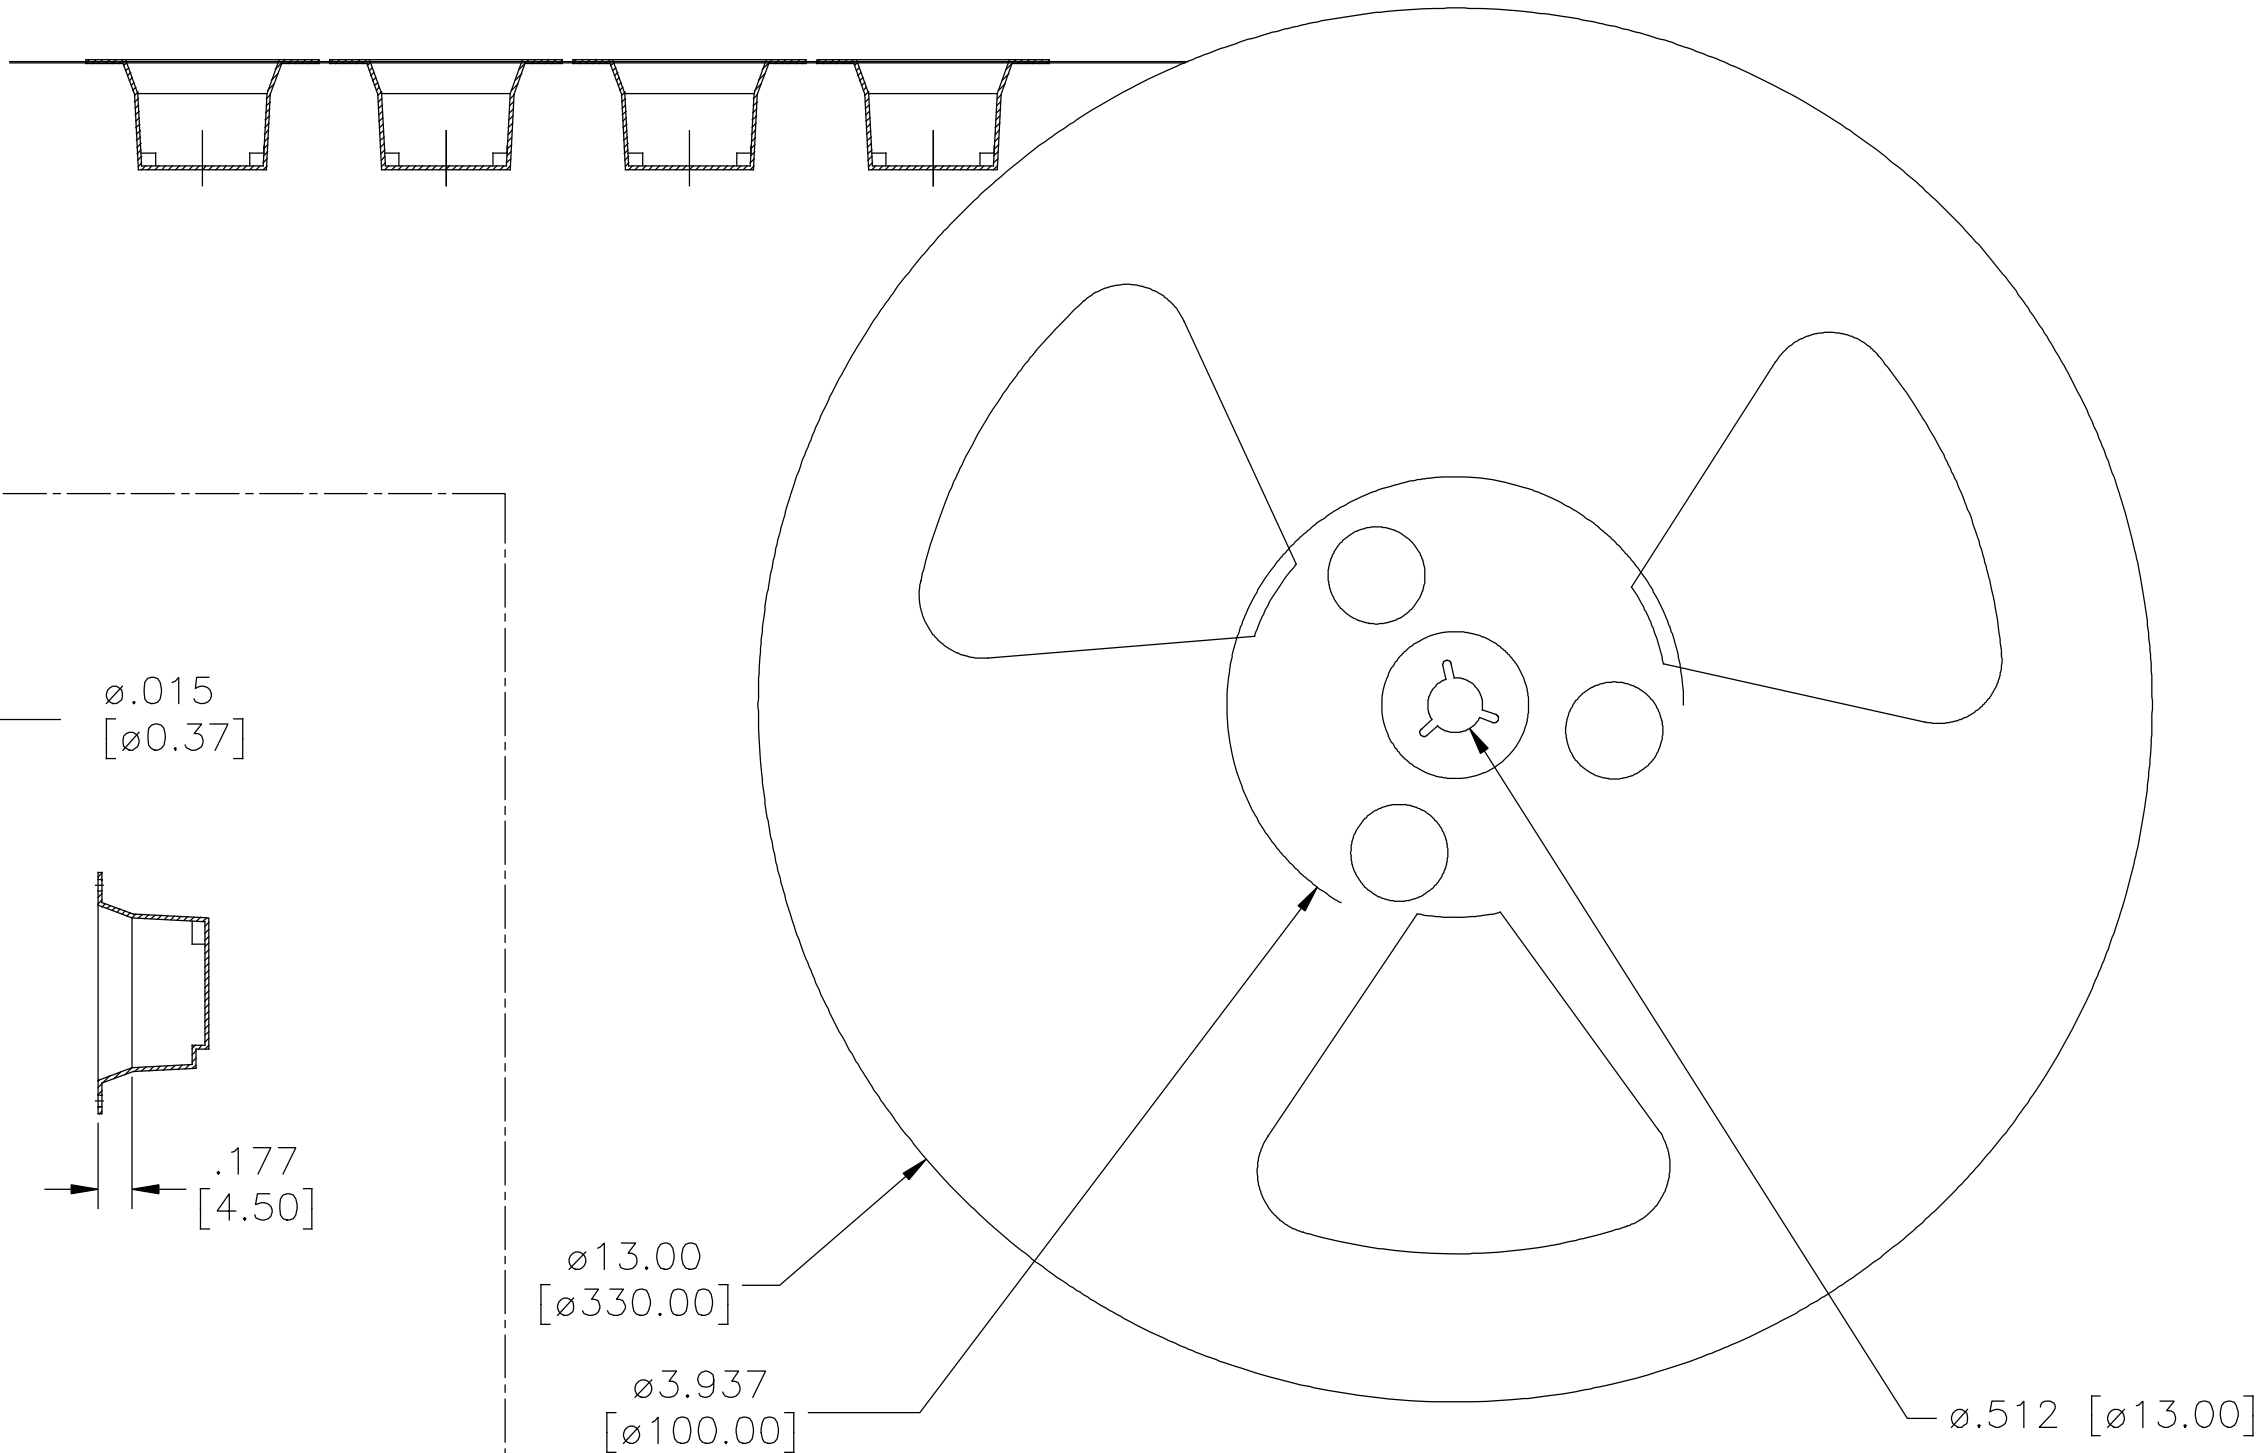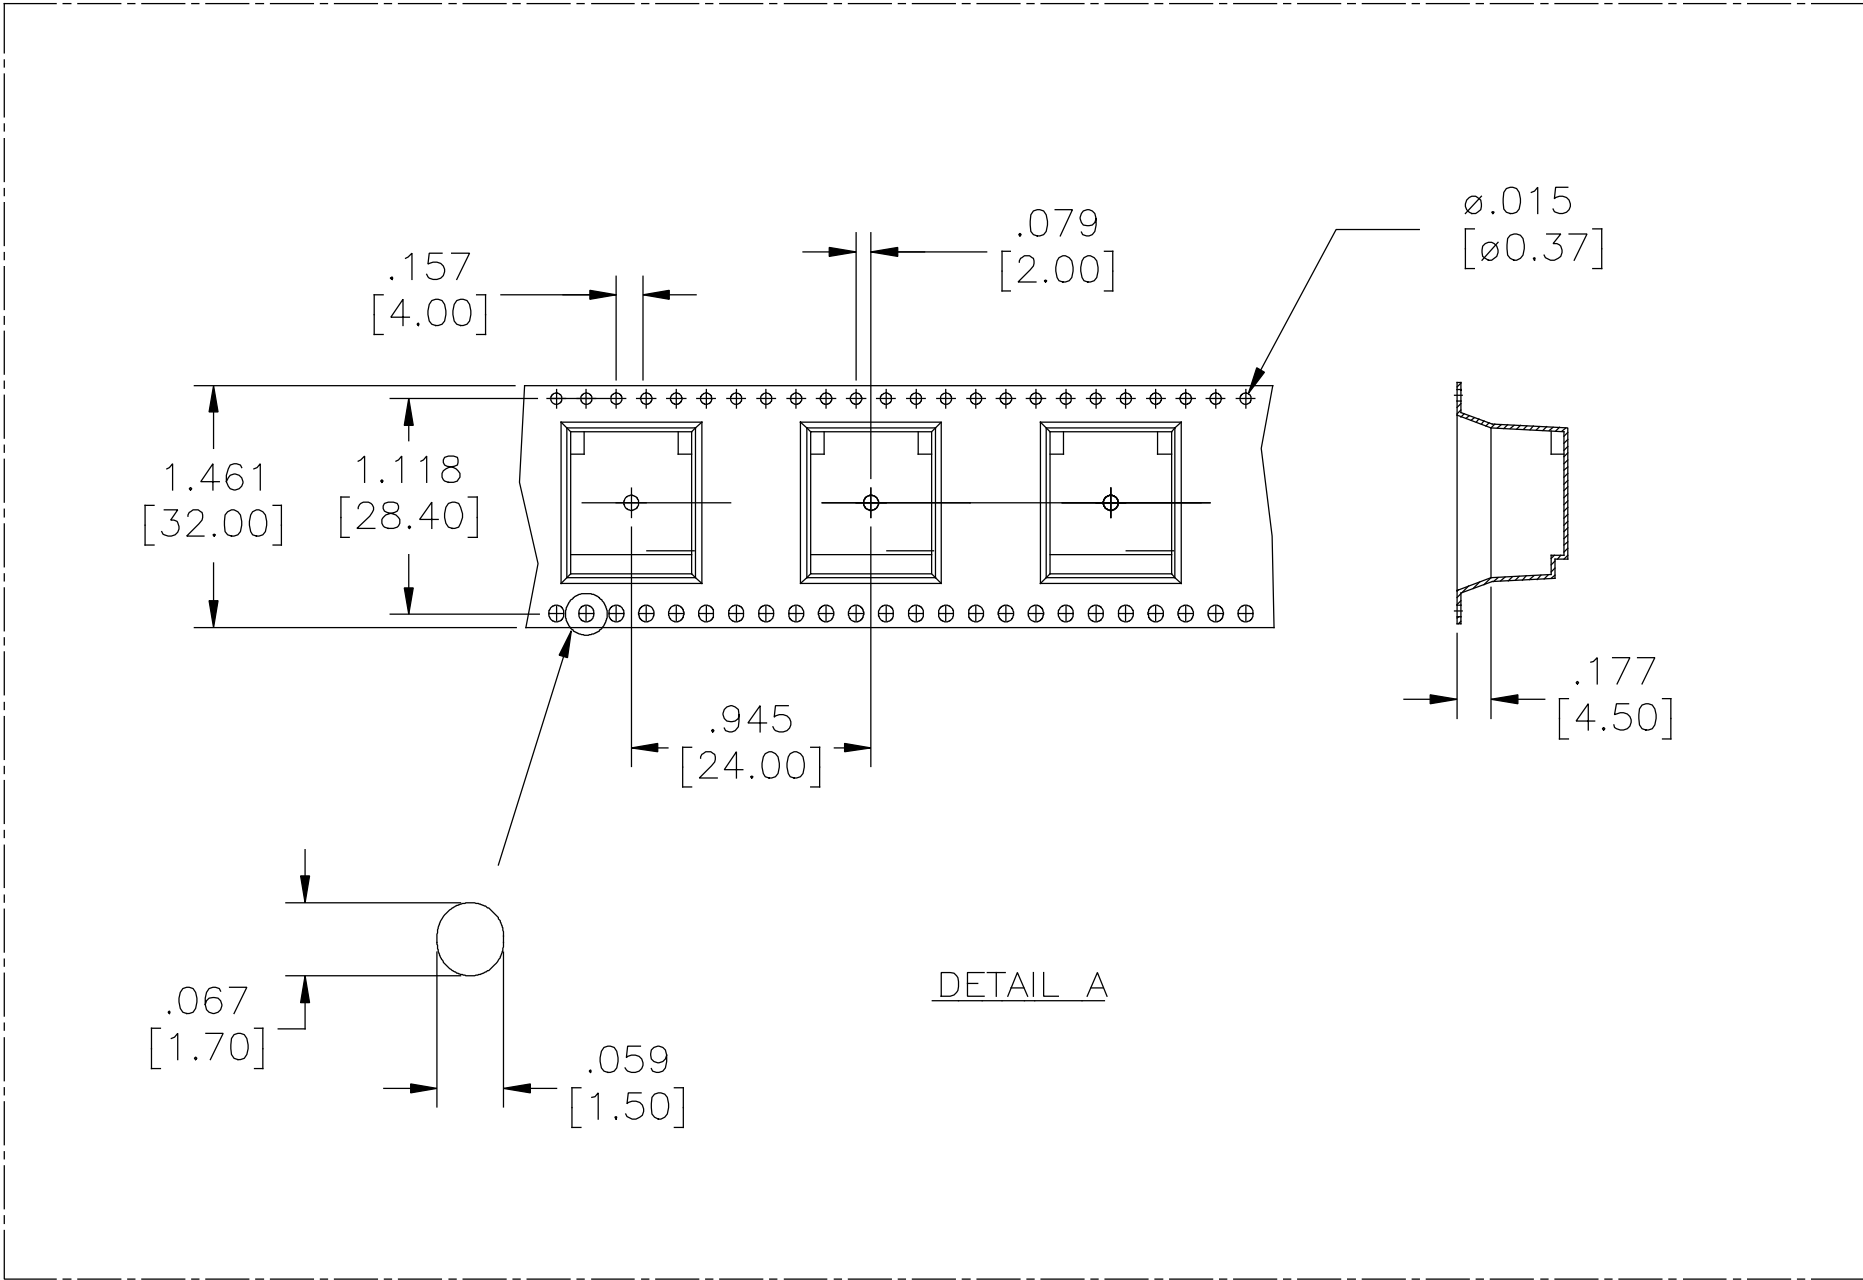

DRAWN	Chigow	DATE	MAY09,06	Amphenol Canada Corp.		
DESIGNED						
CHECKED	PAULW	MAY09,06		TITLE RJE05 SERIES MODULAR JACK, 8 POSITIONS, 8 CONTACTS, SHIELDED, HOUSING WITHOUT BOARDLOCK, SEPCIAL TAIL LENGHT .057", ULTRA LOW PROFILE, ,WITH T & R PACKAGE-RoHS COMPLIANT		
I. E. APPRD.	YM.LEE	FEB.27/07				
Q. A. APPRD.						
DWG. APPRD.						
ENG. REL. NO.				DWG	DRAWING NO.	REV.
REF.					P-RJE05-188-1417H	N
DIMENSIONS ARE IN	CODE ID. NO.			SCALE	WT.	SURF.
INCH[mm]	03554					
						SHEET 2 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.