




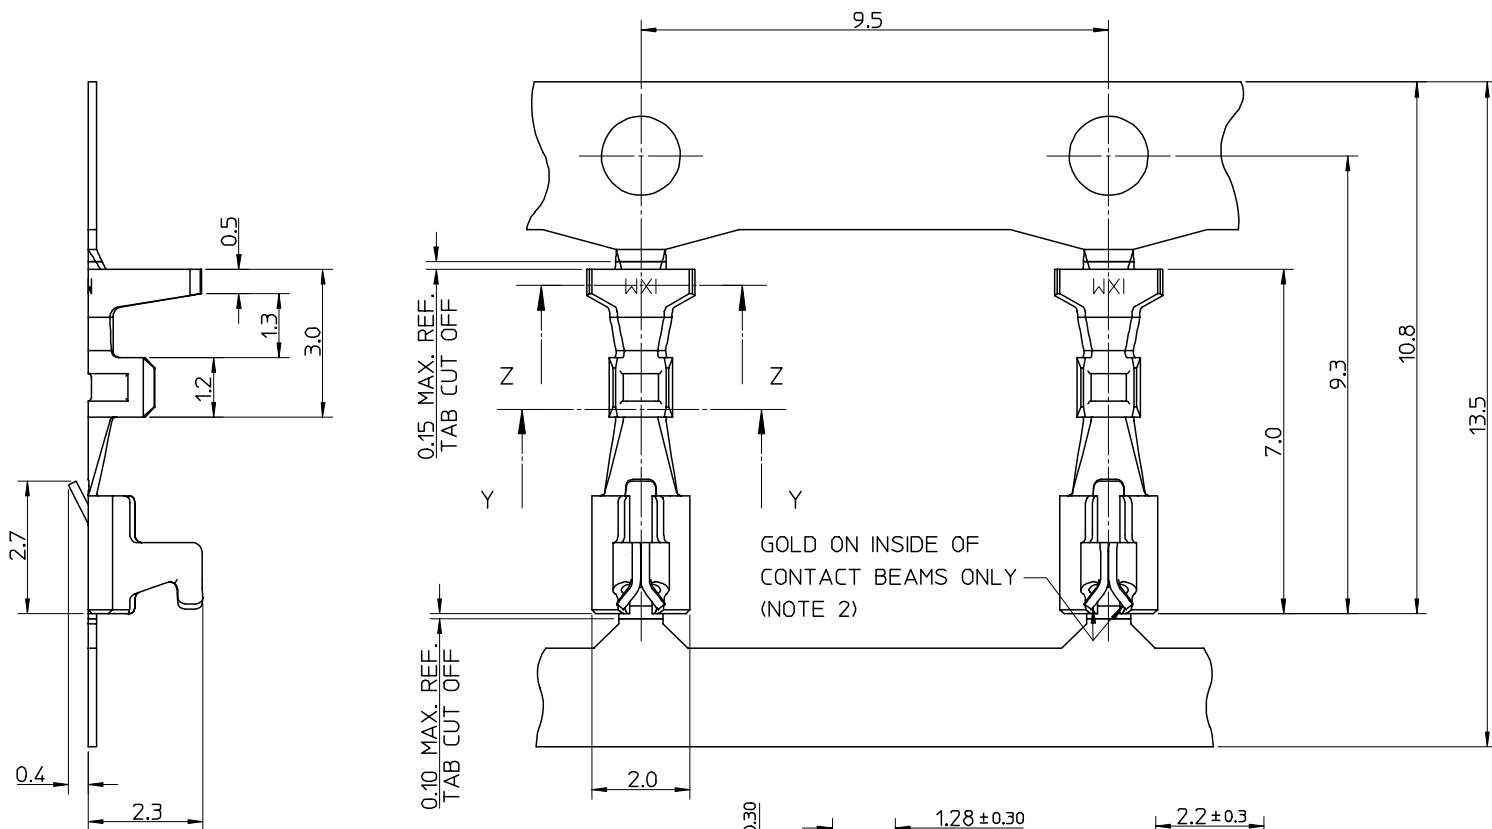

UN-REELING
DIRECTION

PART NO.	FORM	PLATING (NOTE 2)
91821-0001	REEL	TIN
91821-0003	REEL	GOLD



NOTES:

1. MATERAIL:

PHOSPHOR BRONZE, THICKNESS 0.17 REF.

2. PLATING:

TIN: 3um MIN PURE TIN.

GOLD: 1.27 MIN NICKEL UNDERCOAT AND
0.76UM MIN GOLD IN CONTACT AREA.

3. CONFORMS TO PRODUCT SPECIFICATION PS-99020-0011.

4. SEE CRIMP SPECIFICATION CS-91821-001.

5. APPLICABLE WIRE 24, 26 AND 28AWG.

6. INSULATION DIAMETER 1.5mm MAX.

7. USE WITH HOUSING SERIES 91935, SEE SD-91935-001.

8. SEE PACKAGING SPECIFICATION PK-91821-001.

REV	DESCRIPTION
1	REV DSGN/REM P/N'S
2	EC NO: E2006-1109
3	DRWN: JDENNEHY 2007/04/04
4	CHKD: DWASZKIEWICZ 2007/04/04
5	APPR: JDENNEHY 2007/04/04

QUALITY SYMBOLS
$\nabla = 0$
$\nabla = 0$

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.15	± ---
1 PLACE	± 0.25	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
JDENNEHY	2006/02/27
CHECKED BY	DATE
DWASZKIEWICZ	2006/02/28
APPROVED BY	DATE
JDENNEHY	2006/02/28
MATERIAL NO.	

SEE CHART

SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
7 8 8	TITLE PICOFLEX DISCRETE WIRE CRIMP TERMINAL ROHS COMPLIANT	
	MOLEX INCORPORATED	

DOCUMENT NO.	SHEET NO.
SD-91821-001	1 OF 1