
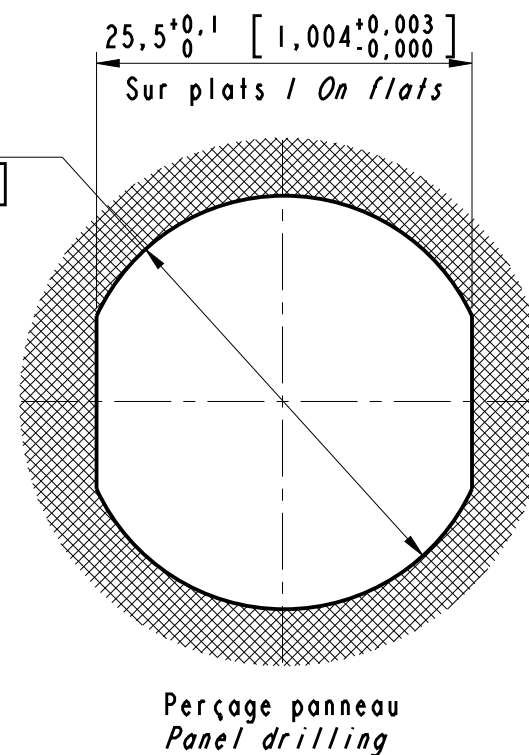
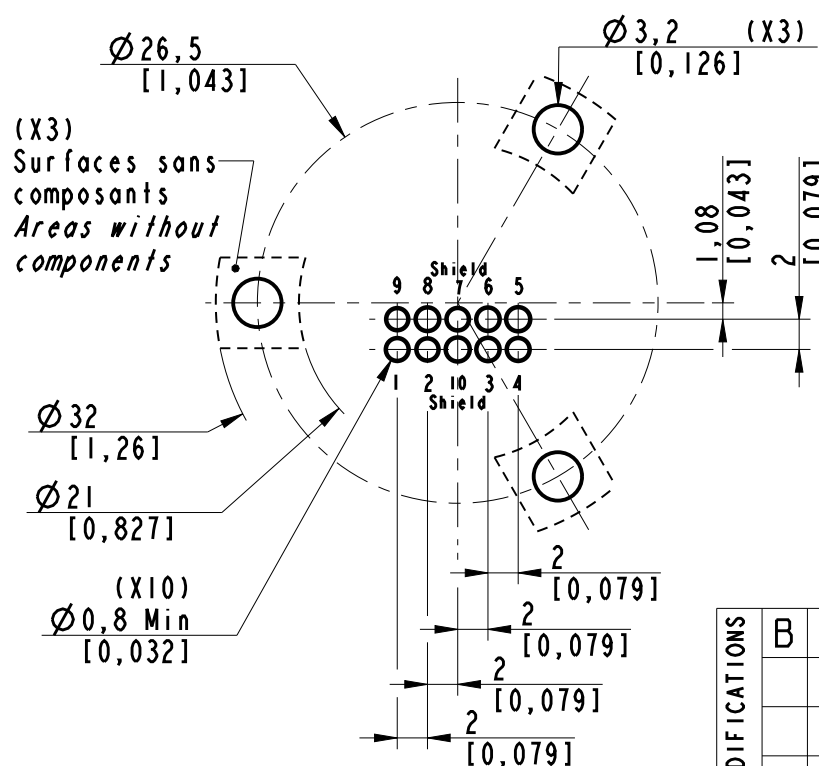
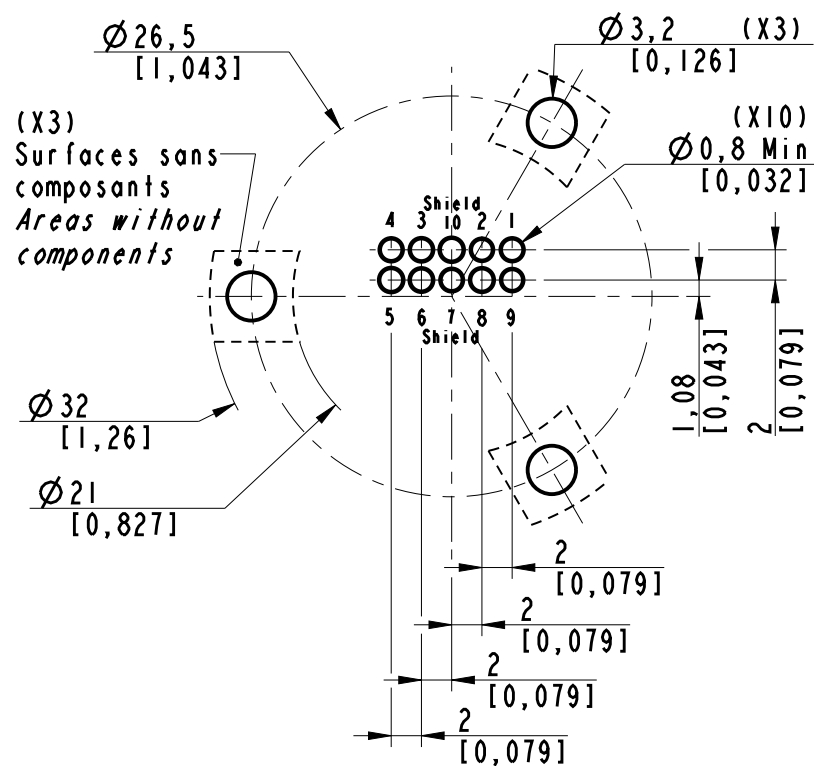
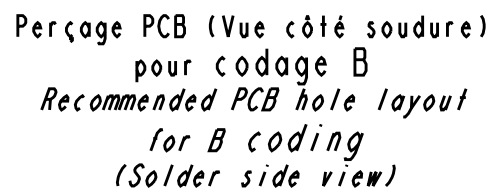
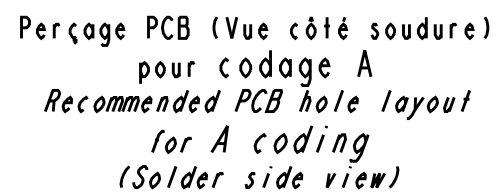
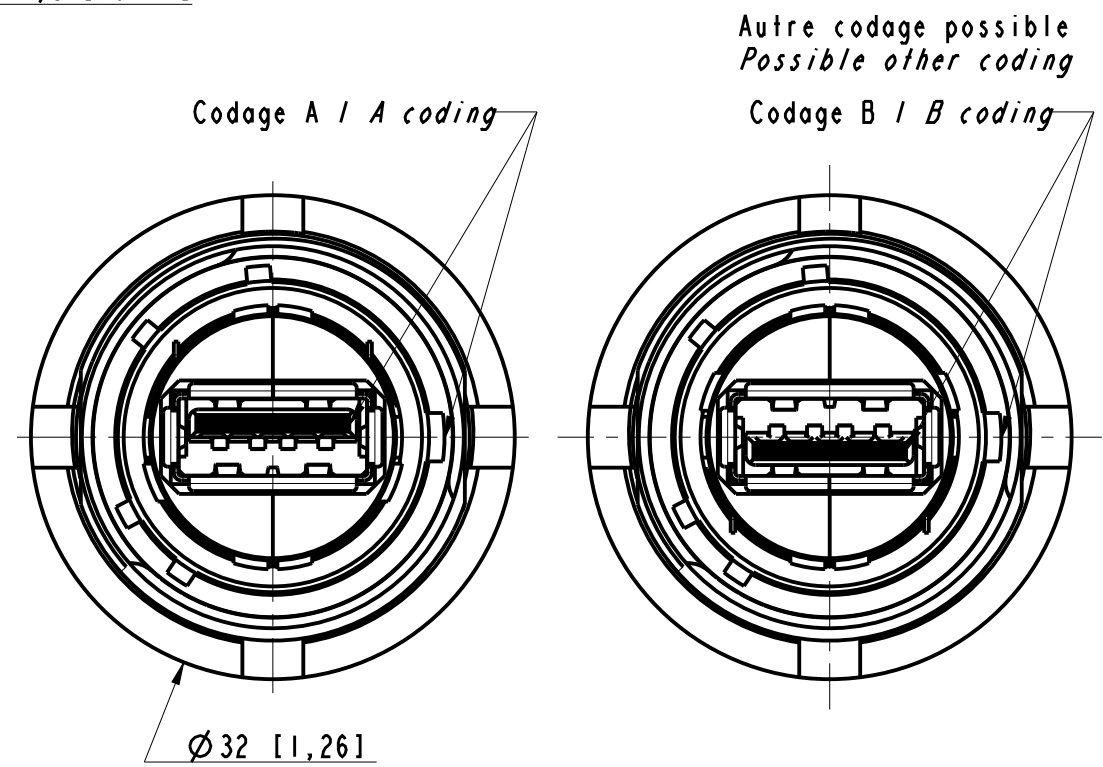
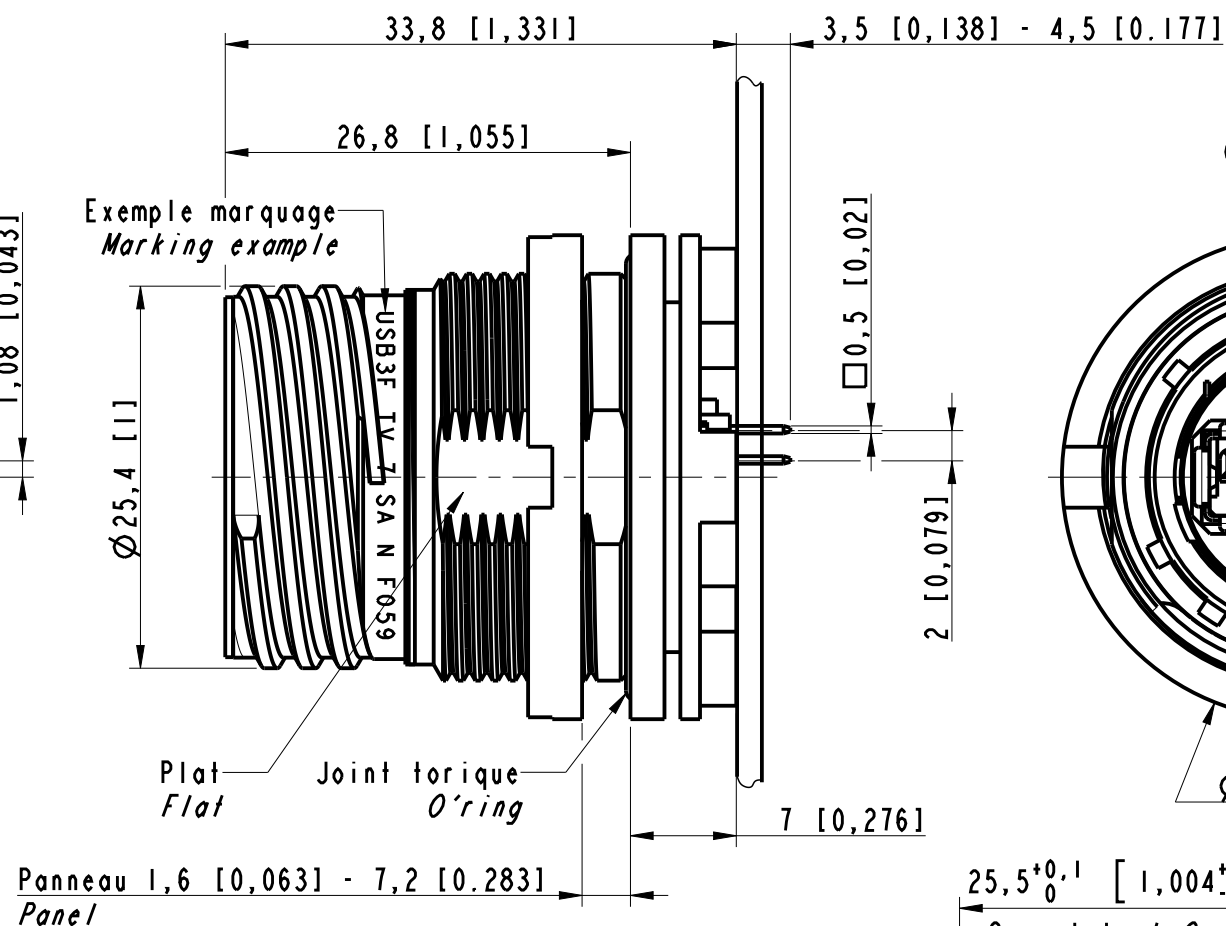
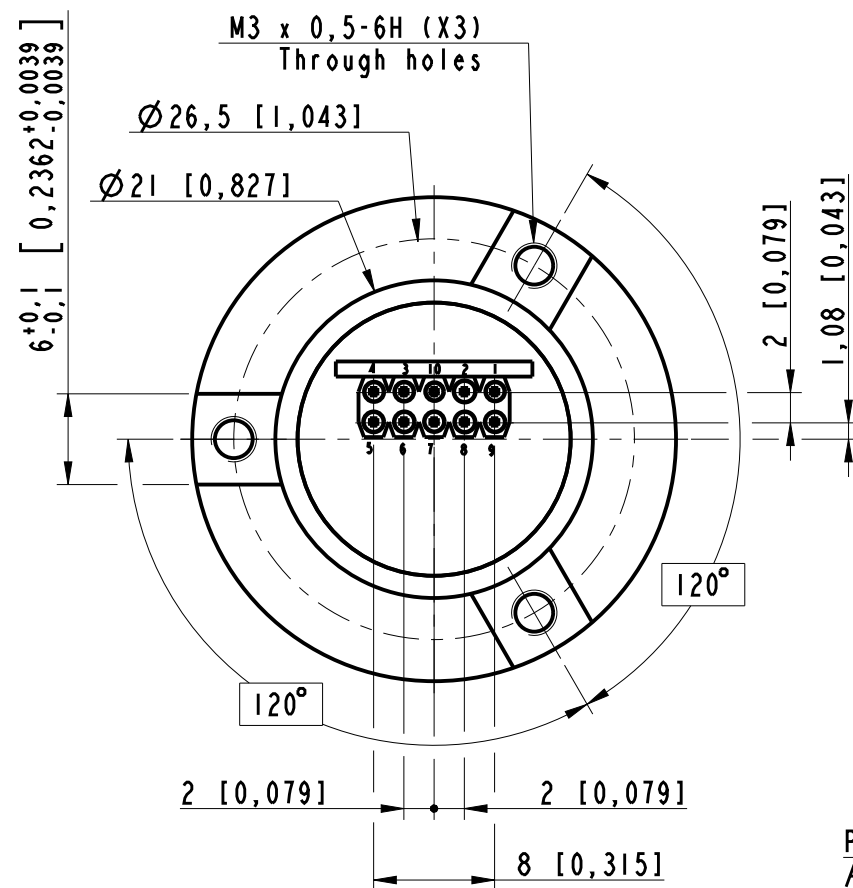




Pin assignments:

| USB3.0 standard A front side connector                                                |          |            |             |
|---------------------------------------------------------------------------------------|----------|------------|-------------|
|  | Sequence | Pin number | Signal name |
|                                                                                       | Second   | 1          | VBUS        |
|                                                                                       | Third    | 2          | D-          |
|                                                                                       |          | 3          | D+          |
|                                                                                       | Second   | 4          | GND         |
|                                                                                       | Last     | 5          | StdA_SSRX-  |
|                                                                                       |          | 6          | StdA_SSRX+  |
|                                                                                       |          | 7          | GND_DRAIN   |
|                                                                                       |          | 8          | StdA_SSTX-  |
|                                                                                       |          | 9          | StdA_SSTX+  |
| First                                                                                 | Shell    | Shield     |             |

|              |                                          |
|--------------|------------------------------------------|
| A : A coding | G: Olive drab cadmium plating - Not RoHS |
| B : B coding | N: Nickel plating - RoHS                 |
|              | ZN: Black Zinc Nickel plating - RoHS     |

USB3F TV 7 Sx x F059  
Reduced flange Stand Off Jam Nut Receptacle

|               |   |                                                    |                                                                                       |
|---------------|---|----------------------------------------------------|---------------------------------------------------------------------------------------|
| MODIFICATIONS | B | Plan modifié<br><i>Updated drawing</i><br>14/05/18 | ECHELLE                                                                               |
|               |   |                                                    | 2                                                                                     |
|               |   |                                                    |  |
|               |   |                                                    |                                                                                       |

Amphenol Socapex

BP 29 - 74311 THYEZ CEDEX

|                 |              |
|-----------------|--------------|
| DESSIN: RINSANT | LE: 28/11/17 |
|-----------------|--------------|

TECHNIQUE: GUYOMAR LE:17/05/18

|   |  |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|--|
| B |  |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|--|

|                |     |
|----------------|-----|
| 191-PLC-802-00 | 1/1 |
|----------------|-----|