



The battery powered light switch

Features:

- Quick and Simple to Install
- Replaces awkward cable runs
- Simple installation option for extra light switches
- Simple screw to the wall
- Up to 200m range outdoors
- Up to 80m range in buildings
- High Quality UK manufacture
- Outdoor Weatherproof IP65
- Receiver enclosure
- Supplied ready to operate
- Switches any load up to 1.2kW



Description

The RF Solutions' **SWITCHLINK**

System offers a quick, simple and cost effective solution to light switching, when cabling is tricky, expensive or time consuming.

Ordering Information

Part Number	Description
SWITCHLINK-S1	SWITCHLINK system—Supplied Complete with Tx and Rx

Installation Guide


Connections

SWITCHLINK can be installed in minutes, simply wire the receiver and attach the transmitter to the wall in your chosen location.

Wall Switch Transmitter:

The Wall switch transmitter is simply attached to the wall in the location required.

Wall Mounting templates are given on Page 3
AS SHOWN IN FIG 1.1

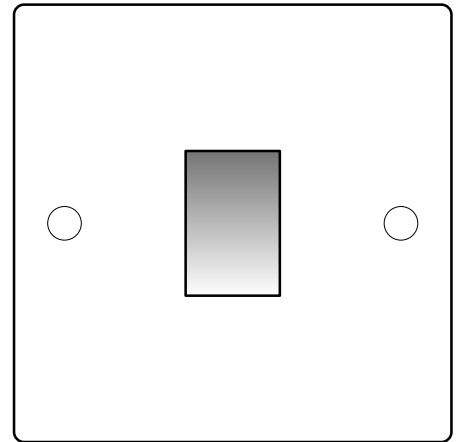

Transmitter - SWITCHLINK-TX1 FIG 1.1

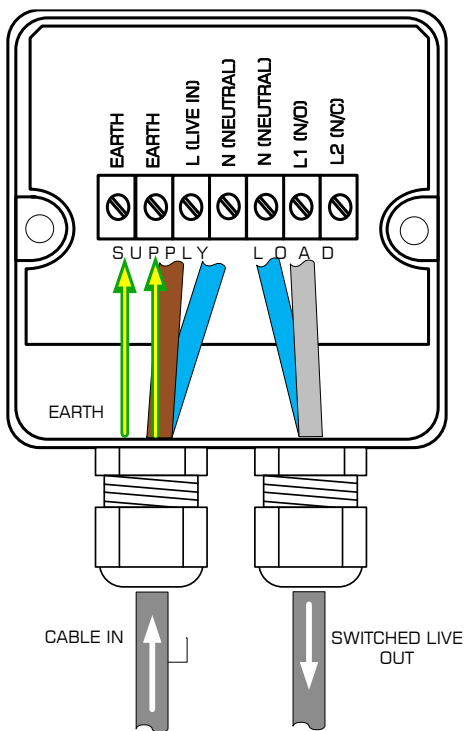


FIG 1.2

Receiver - MAINSLINK-RX

Receiver:


1. Connect the Supply:
LIVE, NEUTRAL and EARTH.
Connect the Live to the screw terminal marked: LIVE connect the NEUTRAL and EARTH respectively.
2. Connect the LOAD to the receiver and wire in as required.
3. In most applications the LOAD would be wired as shown in FIG 1.2

Important Notes:


- All mains powered units must be earthed
- Hardwired units must be connected via an isolating switch
- See Safety information on page 5 before installing


SWITCHLINK System Operation

Switch in **OFF** Position

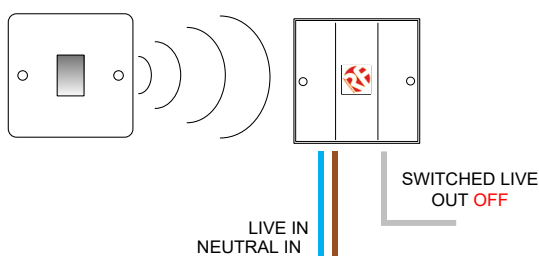

Switch in **ON** Position

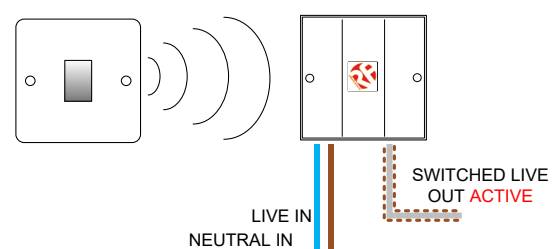


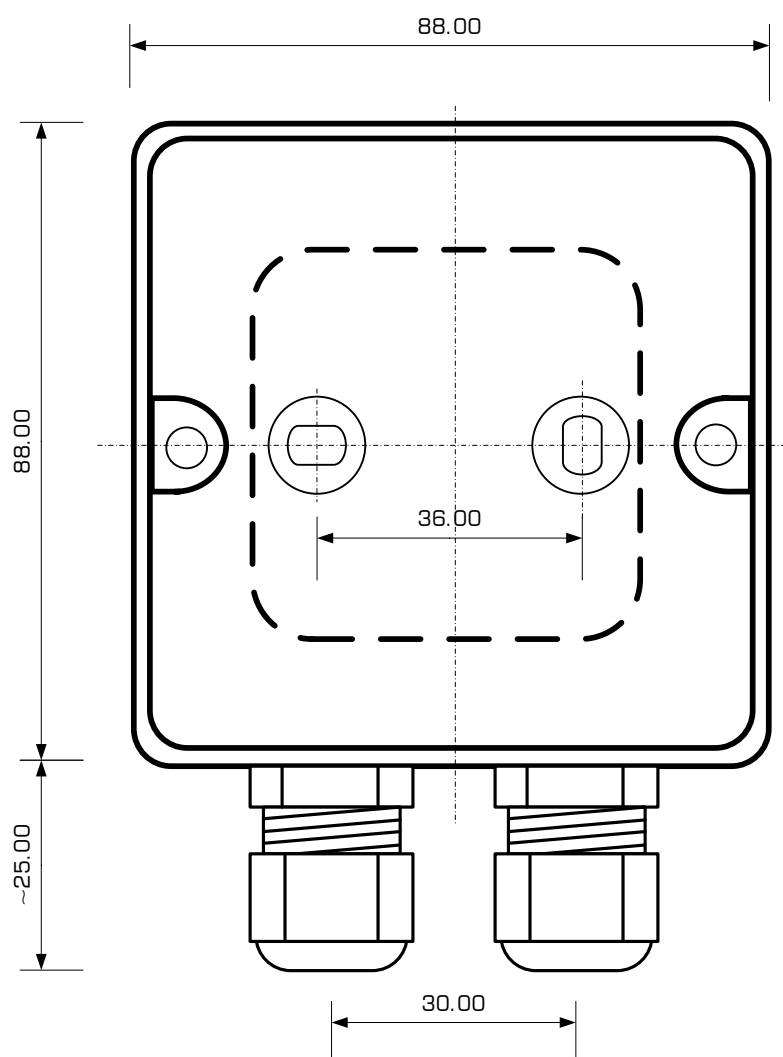

Dimensions and Wall mounting information:

SWITCHLINK is a professional use product and should only be installed by a competent person.

FIG 1.3 Wall Mounting Templates
Scale 1:1
All dimensions in mm

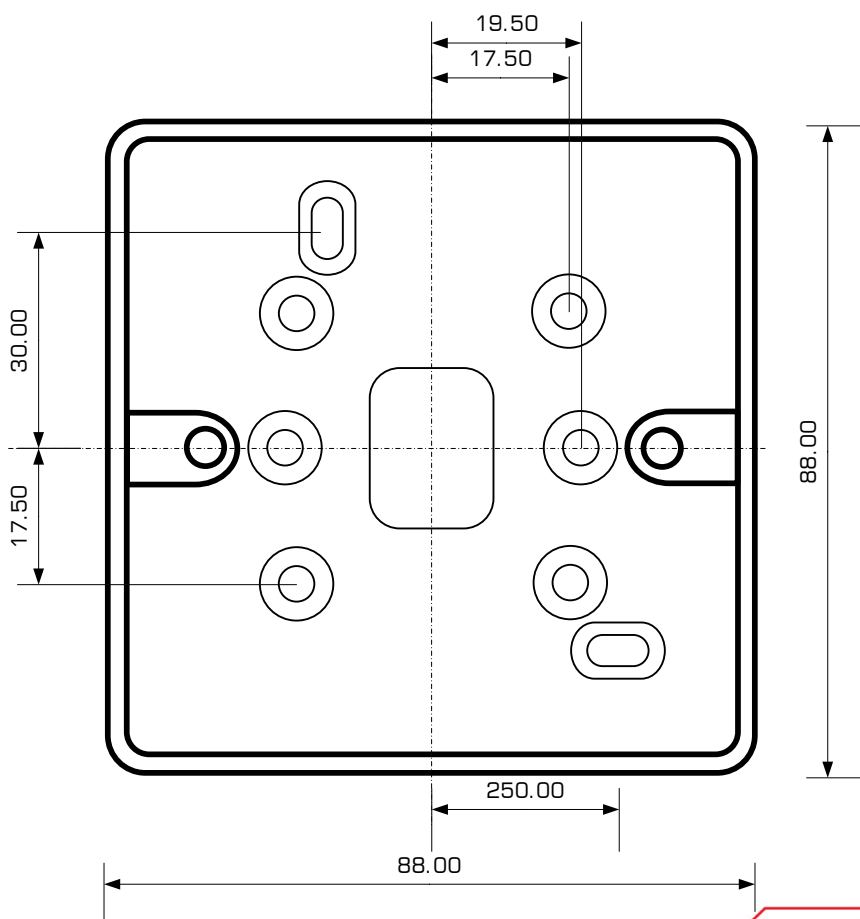

Pairing a Receiver

NOTE: SWITCHLINK Systems are supplied pre-paired. This process is described for advanced use only.

To pair the MAINSLINK-RX it must have a 230Vac supply connected.

1. Briefly place a magnet on the receiver by the MAINSLINK-RX as shown in FIG1.3.

This will put the system in learn mode.

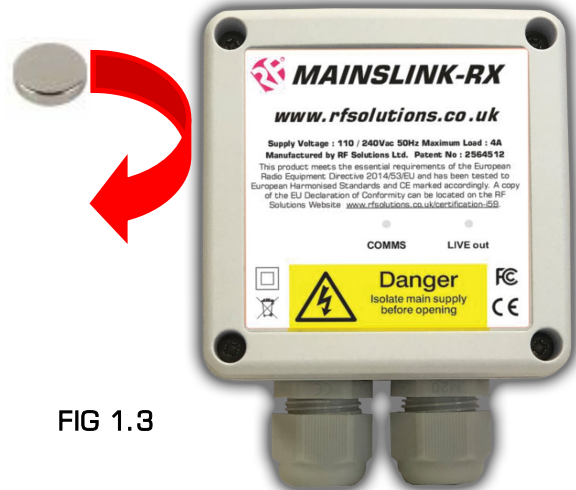


FIG 1.3



2. When the receiver is in learn mode you will need to pair the transmitter within 10 seconds. To do this you must switch on the transmitter for 2 seconds and then turn it off.

3. Allow 15 seconds for the receiver to return to normal operation.

Erasing a Receiver

To erase all transmitters from the MAINSLINK-RX hold a magnet beside the learn switch for 10 seconds as shown in FIG 1.4.

NOTE: You cannot erase individual MAINSLINK-TX units.

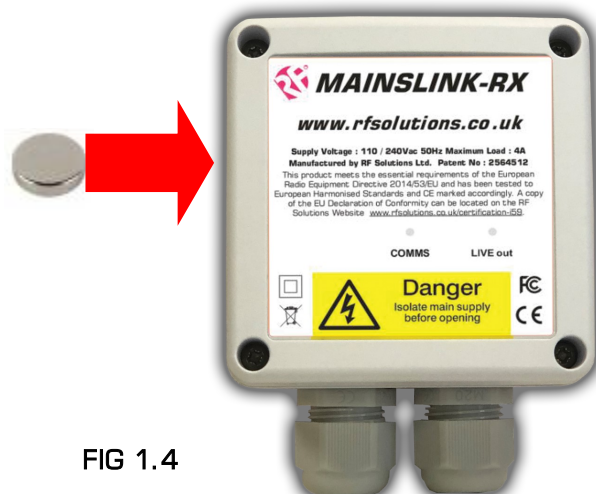


FIG 1.4

Technical Information

SWITCHLINK Transmitter

Battery: CR2032 (Li-Ion)

Capacity: 220mAh

Battery Life Expectancy: 5+years @ 50presses/day

Storage Temperature: -10 to +70° Celsius.


Operating Temperature: 0 to +50° Celsius.

	Min	Typical	Max	Units
Supply Voltage:		3V		Vdc
Quiescent Current:		4		uA
Operating Frequency	- 0.045	869.50	+0.04 5	MHz
RF Output Power (ERP)		3		mW
Packet Length		~25		mS

Changing batteries:

Open the SWITCHLINK-TX1 by unscrewing the two screws on the front of the case.

Gently slide the battery out of the mounting bracket using your fingers - do not use pliers as you may damage the PCB.

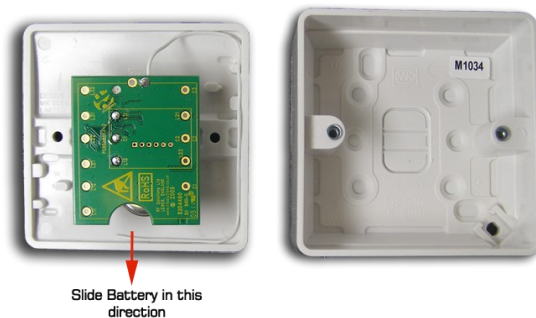

MAINSLINK-RX Receiver

Power Supply: 110 -240Vac @ 50-60Hz

Storage Temperature: -10 to +70° Celsius.

Operating Temperature: 0 to +50° Celsius.

	Min	Typical	Max	Units
Supply Voltage	100	230	250	Vac
Quiescent Current:		0.1		mA
Operating Frequency	-0.1	869.50	+0.1	MHz
Maximum switching load (RX)		1200		W
Time delay from Tx on switch to Rx Relay operation:		50	2000	mS
Time delay from Tx sw relax to Rx Relay release:		50	2000	mS

Product Range:

Other product in this range:

MAINSLINK

Mainslink is a 230V mains switching cable replacement system - very simple to install and very reliable the MAINSLINK simply replaced switch live cables when runs are awkward or expensive. Wire Switched Live and Neutral to the TX and Live, Neutral to the receiver and the MAINSLINK outputs a switch live at the receiver when the Switched live on the transmitter is on.

Important Safety Information:

NOTE:

- Must be installed in compliance with IEEE wiring regulations and (where required) with Part P (Electrical Safety) of building regulations.
- SWITCHLINK is a professional use product and should only be installed by correctly qualified competent person.
- Always Isolate mains powered products before opening the case.
- Information contained in this document is believed to be accurate, however no representation or warranty is given and R.F. Solutions Ltd assumes no liability with respect to the accuracy of such information. Use of R.F Solutions as critical components in life support systems is not authorised except with express written approval from R.F Solutions Ltd.
- If in doubt call our technical support line before use on +44 (0)1273 898007

Simplified Declaration of Conformity (RED)

BG - С настоящото RF Solutions Limited декларира, че този тип радиосъоръжение дефинирани в този документ е в съответствие с Директива 2014/53/EC. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: www.rfsolutions.co.uk

CS - Tímto RF Solutions Limited prohlašuje, že typ rádiového zařízení definované v tomto dokumentu je v souladu se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: www.rfsolutions.co.uk

DA - Hermed erklærer RF Solutions Limited, at radioudstyrstypen defineret i dette dokument er i overensstemmelse med direktiv 2014/53/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: www.rfsolutions.co.uk

DE - Hiermit erkläre RF Solutions Limited, dass der Funkanlagentyp in diesem Dokument definiert der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: www.rfsolutions.co.uk

EL - Με την παρούσα ο/η RF Solutions Limited, δηλώνει ότι ο ραδιοεξοπλισμός ορίζεται σε αυτό το έγγραφο πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: www.rfsolutions.co.uk

EN - Hereby, RF Solutions Limited declares that the radio equipment type defined within this document is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.rfsolutions.co.uk

ES - Por la presente, RF Solutions Limited declara que el tipo de equipo radioeléctrico definido dentro de este documento es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: www.rfsolutions.co.uk

ET - Käesolevaga deklareerib RF Solutions Limited, et käesolev raadioseadme tüüp määratletud selles dokumendis vastab direktiivi 2014/53/EÜ nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: www.rfsolutions.co.uk

FI - RF Solutions Limited vakuuttaa, että radiolaitetyyppi määriteltä selles dokumendis on direktiivin 2014/53/EU mukainen. EU-vaatimusten mukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: www.rfsolutions.co.uk

FR - Le soussigné, RF Solutions Limited, déclare que l'équipement radioélectrique du type défini dans ce document est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: www.rfsolutions.co.uk

HR - RF Solutions Limited ovime izjavljuje da je radijska oprema tipa definirani u ovom dokumentu u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: www.rfsolutions.co.uk

HU - RF Solutions Limited igazolja, hogy a dokumentumban meghatározottak szerint típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: www.rfsolutions.co.uk

IT - Il fabbricante, RF Solutions Limited, dichiara che il tipo di apparecchiatura radio definito all'interno di questo documento è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: www.rfsolutions.co.uk

LT - Aš, RF Solutions Limited, patvirtinu, kad radijo įrenginių tipas apibrėžta šiame dokumente atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: www.rfsolutions.co.uk

LV - Ar šo RF Solutions Limited deklarē, ka radioiekārta kas definēts šajā dokumentā atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: www.rfsolutions.co.uk

MT - B'dan, RF Solutions Limited, niddikjara li dan it-tip ta' tagħmir tar-radju definit f'dan id-dokument huwa konformi mad-Direttiva 2014/53/UE. It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej: www.rfsolutions.co.uk

NL - Hierbij verklaar ik, RF Solutions Limited, dat het type radioapparatuur gedefinieerd in dit document conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: www.rfsolutions.co.uk

PL - RF Solutions Limited niniejszym oświadczam, że typ urządzenia radiowego zdefiniowane w tym dokumencie jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: www.rfsolutions.co.uk

PT - O(a) abaixo assinado(a) RF Solutions Limited declara que o presente tipo de equipamento de rádio definido neste documento está em conformidade com a Diretiva 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: www.rfsolutions.co.uk

RO - Prin prezenta, RF Solutions Limited declară că tipul de echipamente radio definit în acest document este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: www.rfsolutions.co.uk

SK - RF Solutions Limited týmto vyhlasuje, že rádiové zariadenie typu definované v tomto dokumente je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: www.rfsolutions.co.uk

SL - RF Solutions Limited potrjuje, da je tip radijske opreme opredeljeno v tem dokumentu skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: www.rfsolutions.co.uk

SV - Härmed försäkrar RF Solutions Limited att denna typ av radioutrustning definieras i detta dokument överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: www.rfsolutions.co.uk

RF Solutions Ltd. Recycling Notice
Meets the following EC Directives:



DO NOT
Discard with normal waste, please recycle.

ROHS Directive 2011/65/EU and amendment 2015/863/EU
Specifies certain limits for hazardous substances.

WEEE Directive 2012/19/EU

Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfills its WEEE obligations by membership of an approved compliance scheme. Environment Agency producer registration number: **WEE/JB0104WW**.

Disclaimer:

Whilst the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular requirements or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use RF Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict QuasarUK Ltd's liability for death or personal injury resulting from its negligence.

www.rfsolutions.co.uk

RF Solutions Ltd

William Alexander House, William Way, Burgess Hill, West Sussex, RH15 9AG
Sales: +44(0)1444 227 910 Tech Support: +44(0)1444 227 909