

# Ultrasonic sensor

## UC1000-18GS-IUEP-IO-V15



- IO-Link Interface for process data, parameterization and diagnosis
- Programmable via DTM with PACTWARE
- Programmable via IrDA (infrared interface)
- Selectable sound lobe width
- Synchronization options
- Enhanced temperature compensation adjustable, stable measuring values already 2 min after switching on
- Push-pull output
- Analog output

Single head system




### Function

The UC\*-18GS\*IO\* series ultrasonic sensor combines versatility with a compact housing. All functions can be conveniently parameterized via IO-Link or IrDa interface.

A precise interference suppression and the adjustable sound beam width allow an optimal adaptation to your application. The output configuration as well as the sound beam width can also be set directly on the sensor via programming buttons. Process and service data can be transmitted via IO-Link, allowing easy integration into Industry 4.0 applications.

### Dimensions

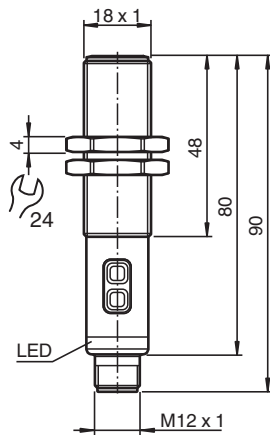

### Technical Data

#### General specifications

Sensing range	70 ... 1000 mm
Adjustment range	90 ... 1000 mm
Dead band	0 ... 70 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 255 kHz
Response delay	minimum : 28 ms factory setting: 56 ms
Sensor cycle time	≥ 14 ms (factory setting) ; programmable to 60 s

Release date: 2020-12-17 Date of issue: 2020-12-17 Filename: 304928-100003\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

## Technical Data

Temperature influence		with temperature compensation: $\leq \pm 0.75\%$ of the end value 10 min after switching on the sensor (factory setting) with enhanced temperature compensation: $\leq \pm 0.75\%$ of the end value 2 min after switching on the sensor without temperature compensation: 0.17 %/K
<b>Memory</b>		
Non-volatile memory		EEPROM
Write cycles		300000
<b>Indicators/operating means</b>		
LED green		solid: power on flashing: standby mode or IO-Link communication
LED yellow		solid: object in evaluation range flashing: switch point programming, object detected
LED red		solid: error flashing: switch point programming, object not detected
<b>Electrical specifications</b>		
Operating voltage	$U_B$	10 ... 30 V DC , ripple 10 % <sub>SS</sub>
No-load supply current	$I_0$	$\leq 60$ mA
Power consumption	$P_0$	$\leq 1000$ mW
Time delay before availability	$t_v$	$\leq 300$ ms
<b>Interface 1</b>		
Interface type		IO-Link (via C/Q = Pin 4)
IO-Link Revision		1.1
Device profile		Smart Sensor Profile 2
Process data width		32 bit
Device ID		0x300604 (3147268)
Transfer rate		COM 2 (38.4 kBaud)
Min. cycle time		3 ms
SIO mode support		yes
Compatible master port type		Class A Class B (use 3-pole adapter or 3-wire cable)
<b>Interface 2</b>		
Interface type		IrDA (Infrared-Interface)
Mode		point-to-point connection
Transfer rate		115.2 kBit/s
Maximum communication distance		5 cm
<b>Input/Output</b>		
Input/output type		1 synchronization connection, bidirectional
0 Level		0 ... 1 V
1 Level		2.5 V ... $U_B$
Input impedance		$> 22$ k $\Omega$
Output rated operating current		current source $< 2.5$ mA
Pulse length		$\geq 1$ ms with external control, low active
Synchronization frequency		
Common mode operation		$\leq 71$ Hz
Multiplex operation		$\leq 71$ Hz / n , n = number of sensors , n $\leq 10$
<b>Switching output</b>		
Output type		1 push-pull output , short-circuit protected , reverse polarity protected
Rated operating current	$I_e$	100 mA , short-circuit/overload protected
Switching frequency		factory setting: 10 Hz programmable to 23 Hz
Voltage drop		$\leq 2.5$ V
Repeat accuracy		$\leq \pm 0.1$ % of full-scale value
Range hysteresis		1 % of the adjusted operating range (default settings), programmable , min. 1 mm
Off-state current		$\leq 100$ $\mu$ A
<b>Analog output</b>		

Release date: 2020-12-17 Date of issue: 2020-12-17 Filename: 304928-100003\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

**Technical Data**

Output type	1 analog output 0 (4) ... 20 mA or 1 analog output 0 ... 10 V
Resolution	current output: evaluation range [mm]/3200 but ≥ 0.35 mm voltage output: evaluation range [mm]/4000 but ≥ 0.35 mm
Deviation of the characteristic curve	≤ ± 1 % of full-scale value
Repeat accuracy	≤ ± 0.1 % of full-scale value
Load resistor	current output: ≤ 500 Ω voltage output: ≥ 1000 Ω

**Compliance with standards and directives**

Standard conformity	
Standards	EN 60947-5-2:2007+A1:2012 IEC 60947-5-2:2007 + A1:2012 EN 60947-5-7:2003 IEC 60947-5-7:2003 IEC 61131-9:2013

**Approvals and certificates**

EAC conformity	TR CU 020/2011 TR CU 037/2016
UL approval	cULus Listed, Class 2 Power Source
CCC approval	CCC approval / marking not required for products rated ≤36 V

**Ambient conditions**

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)


**Mechanical specifications**

Connection type	Connector plug M12 x 1 , 5-pin
Degree of protection	IP67
Material	
Housing	stainless steel (1.4305 / AISI 303)>BR>PA, PC, POM and PBT plastic parts
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Installation position	any position
Mass	45 g
Tightening torque, fastening screws	max. 30 Nm

**Factory settings**


Output 1	near switch point: 90 mm far switch point: 1000 mm Output mode: Window mode output behavior: NO contact
Output 2	near limit: 90 mm far limit: 1000 mm Output mode: rising ramp output behavior: Current output 4 mA ... 20 mA
Beam width	wide

**Connection**



Release date: 2020-12-17 Date of issue: 2020-12-17 Filename: 304928-100003\_eng.pdf

## Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)
5	GY	(gray)

## Characteristic Curve

### Characteristic response curve

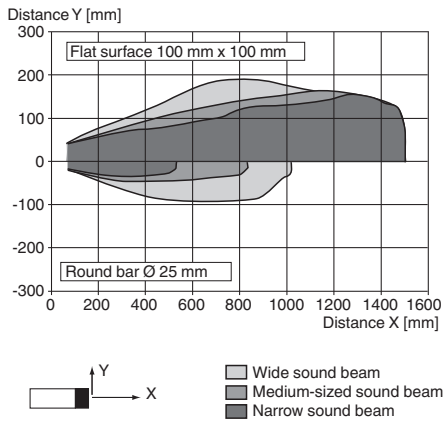

Release date: 2020-12-17 Date of issue: 2020-12-17 Filename: 304928-100003\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com


Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com


## Programming

### Switching output modes


1. Switch point mode

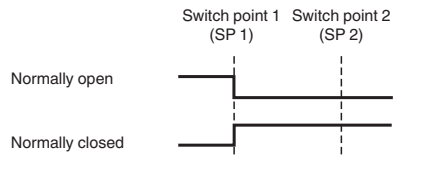


2. Window mode



3. Hysteresis mode




4. Retroreflective mode

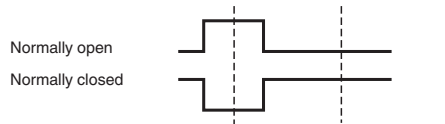



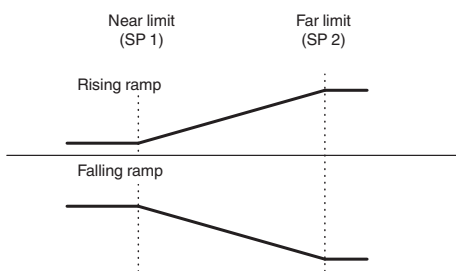


## Programming

### Analog output modes



## Accessories

	<b>UC-PROG-IR-USB</b>	Interface cable for parameterization of sensors with IrDA interface
	<b>IO-Link-Master02-USB</b>	IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection
	<b>V1-G-2M-PVC-V1-G</b>	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PVC cable grey
	<b>BF 18</b>	Mounting flange, 18 mm
	<b>BF 18-F</b>	Plastic mounting adapter, 18 mm

Release date: 2020-12-17 Date of issue: 2020-12-17 Filename: 304928-100003\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".





Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**Accessories**

	<b>AB-18</b>	Mounting aid
	<b>OMH-04</b>	Mounting aid for round steel $\varnothing$ 12 mm or sheet 1.5 mm ... 3 mm
	<b>BF 5-30</b>	Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm
	<b>UVW90-K18</b>	Ultrasonic -deflector

Release date: 2020-12-17 Date of issue: 2020-12-17 Filename: 304928-100003\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

## Function

### Adjustment possibilities

The sensor features a switching output with 2 programmable switch points and an analog output with 2 programmable limits. Programming the switch points, the limits, the output mode, the output logic and the beam width can be done in two different ways:

- Using the sensor's programming buttons
- Using the IO-link interface of the sensor. This method requires an IO-link master (e.g. IO-link-Master02-USB) and the associated software. The download link is available on the product page for the sensor at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

### Synchronization

The sensor features a synchronization input for suppressing ultrasonic mutual interference („cross talk“).

The following synchronization modes are available:

1. Automatic multiplex mode.
2. Automatic common mode
3. Externally controlled synchronization

### Further Documentation

- For information on programming via programming buttons and synchronisation you may refer to the commissioning instruction.
- For detailed information on application and programming via IO-Link we provide a manual.